


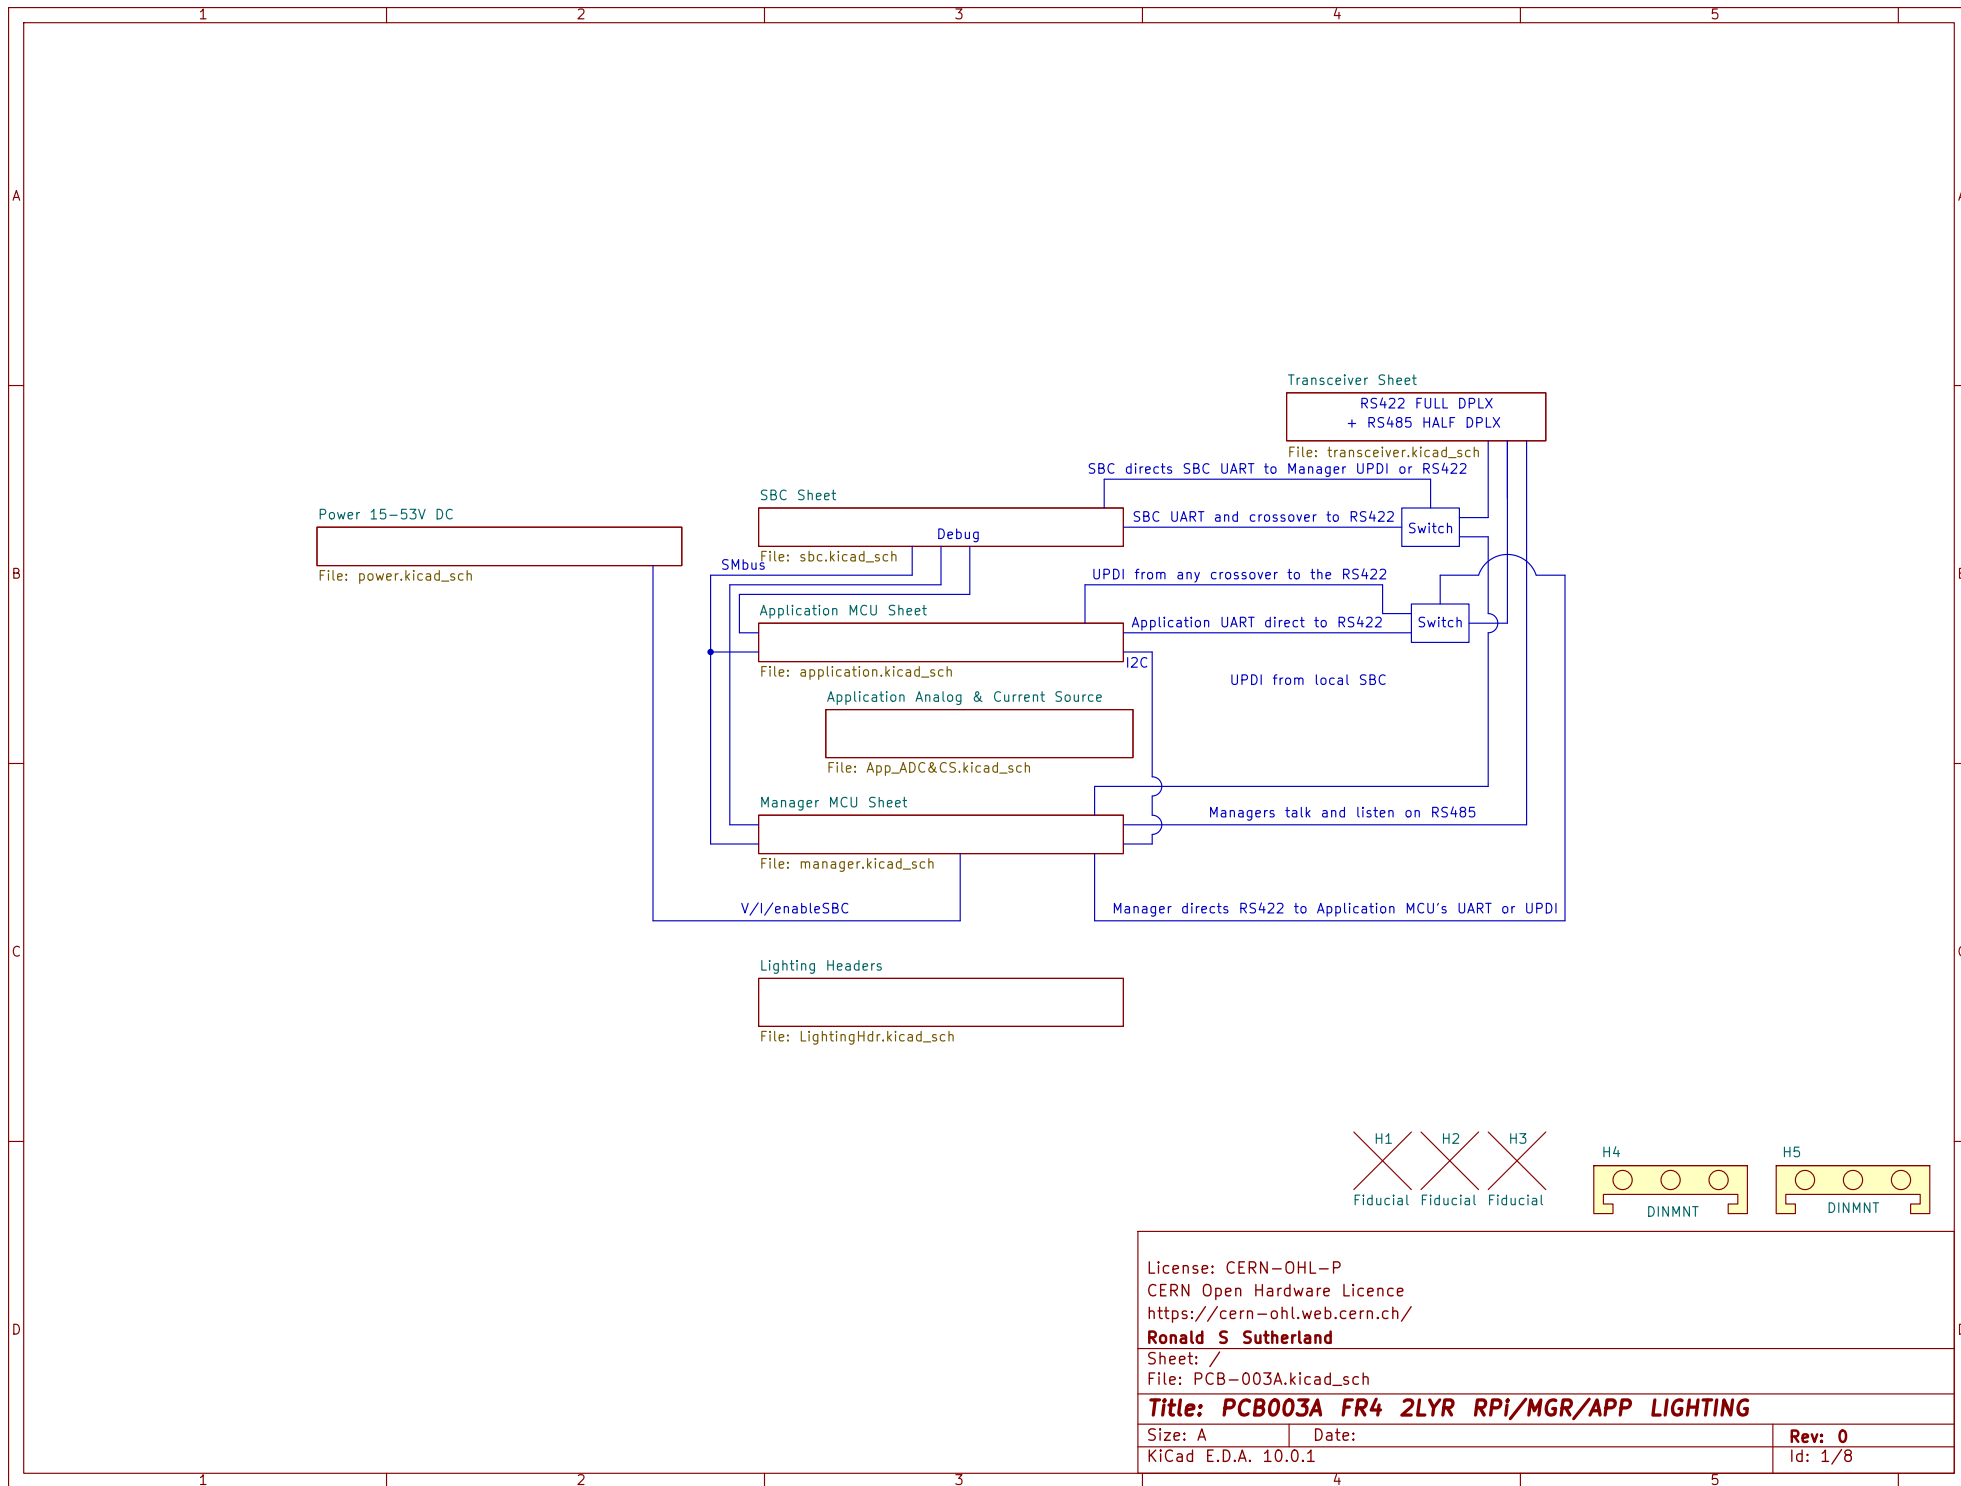



H1 H2 H3
Fiducial Fiducial Fiducial

H4
DINMNT

H5
DINMNT

License: CERN-OHL-P CERN Open Hardware Licence https://cern-ohl.web.cern.ch/ Ronald S Sutherland		
Sheet: / File: PCB-003A.kicad_sch		
Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING		
Size: A	Date:	Rev: 0
KiCad E.D.A. 10.0.1		Id: 1/8

Physical Button Shutdown and Poweroff Overlay
After shutdown use BCM18 to tell Manager MCU to kill power
sudo nano /boot/config.txt
dtoverlay=gpio-poweroff,gpiopin=18,active_low=1
dtoverlay=gpio-shutdown,gpio_pin=6,debounce=3000

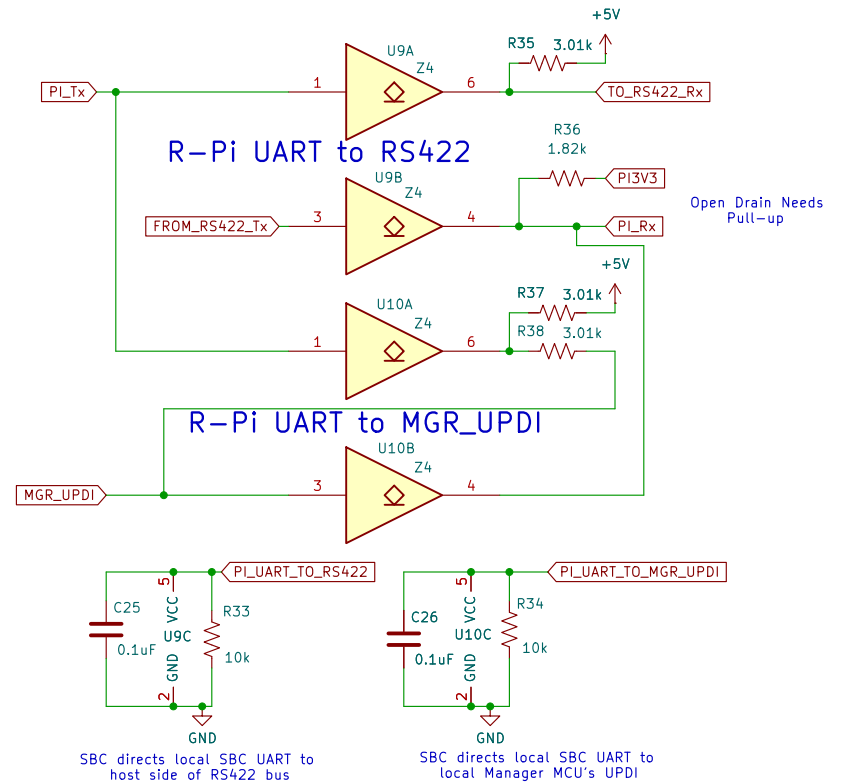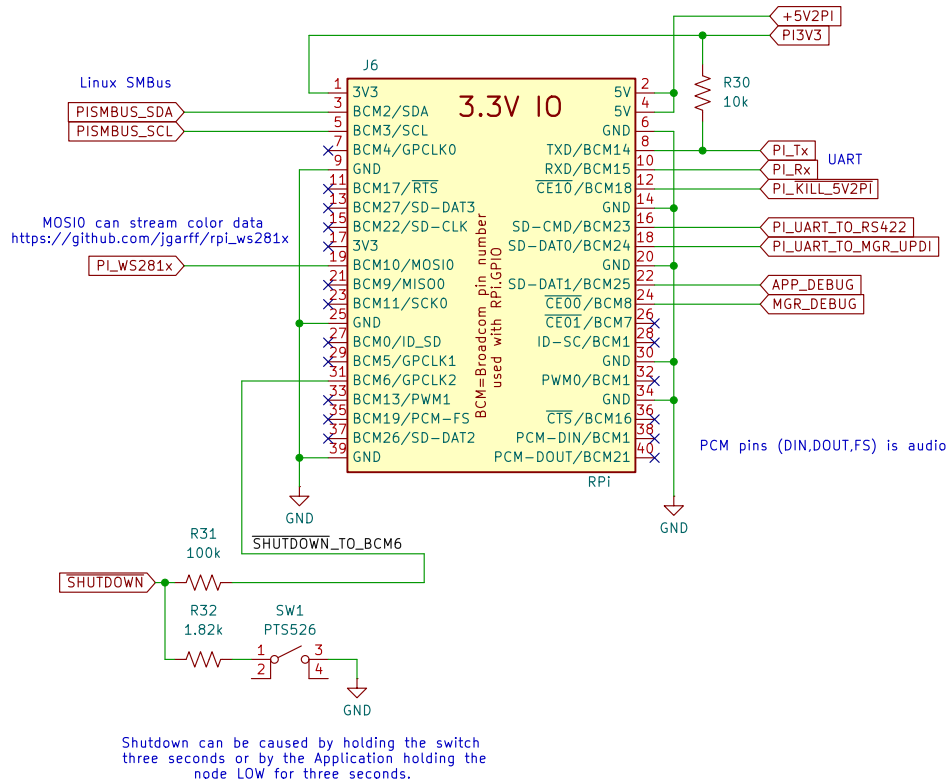

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland


Sheet: /SBC Sheet/
File: sbc.kicad_sch






Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 2/8

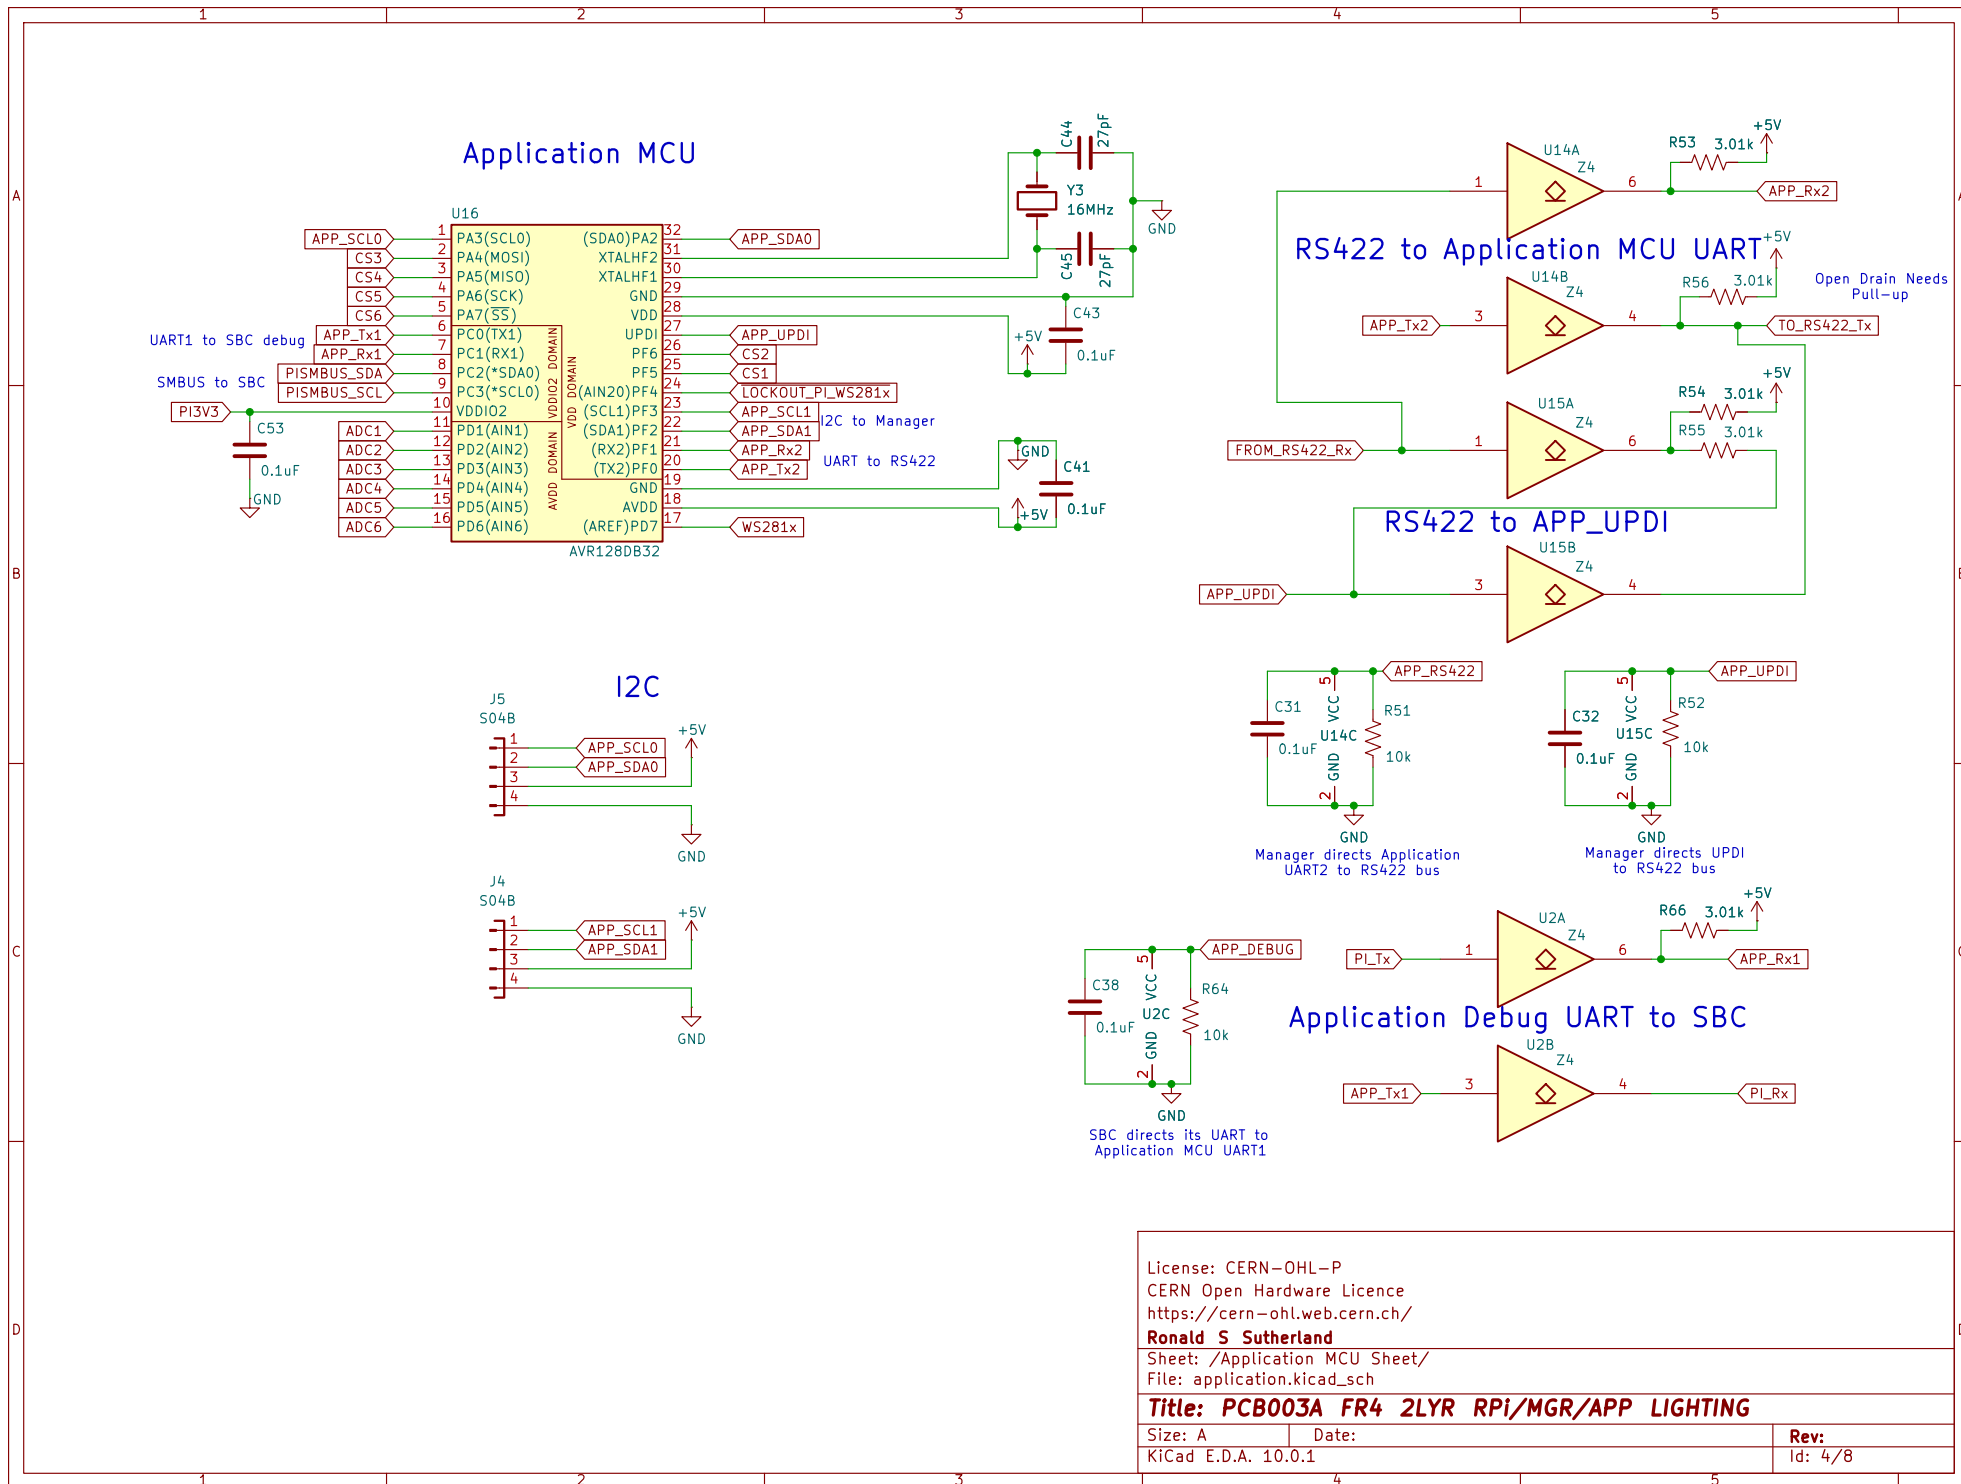

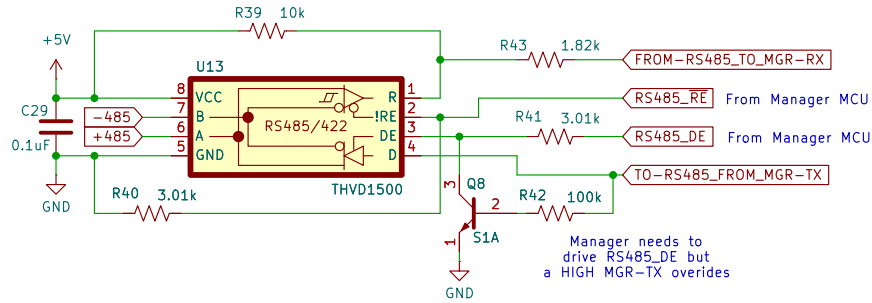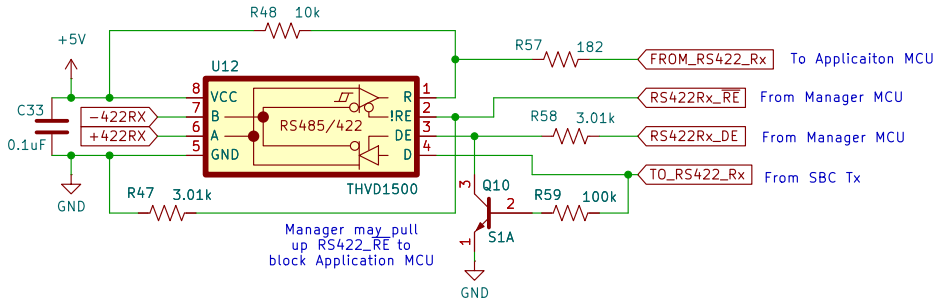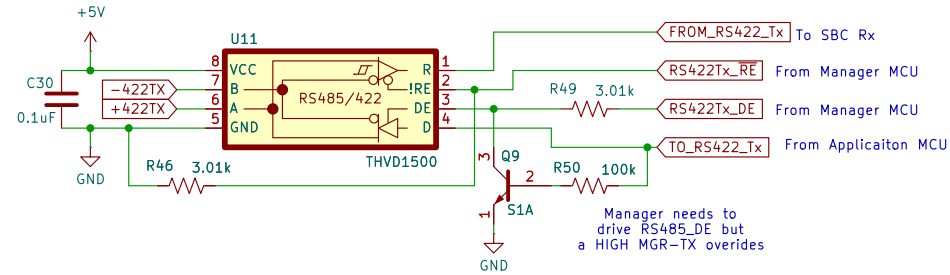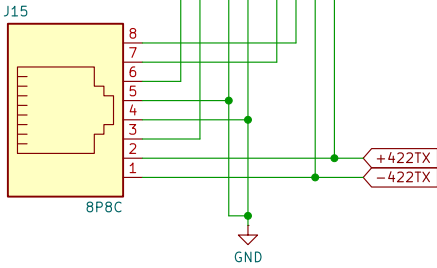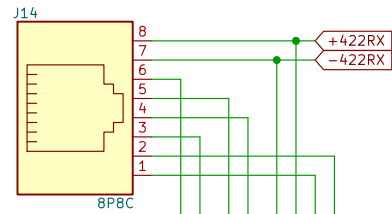

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland



Sheet: /Transceiver Sheet/
File: transceiver.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A4
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 6/8

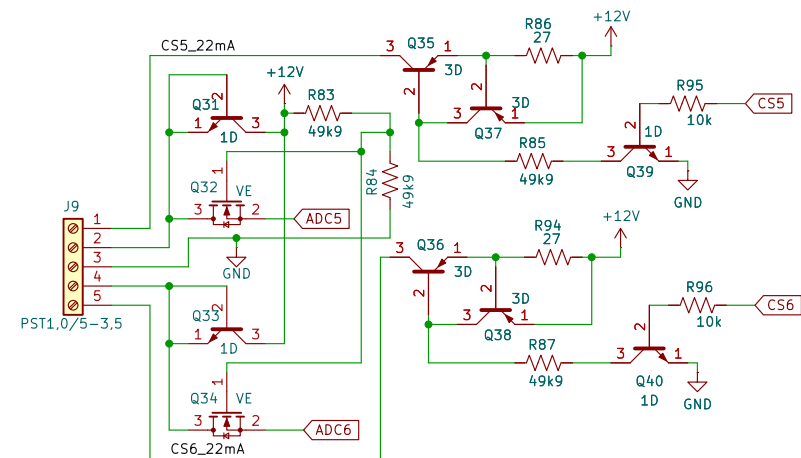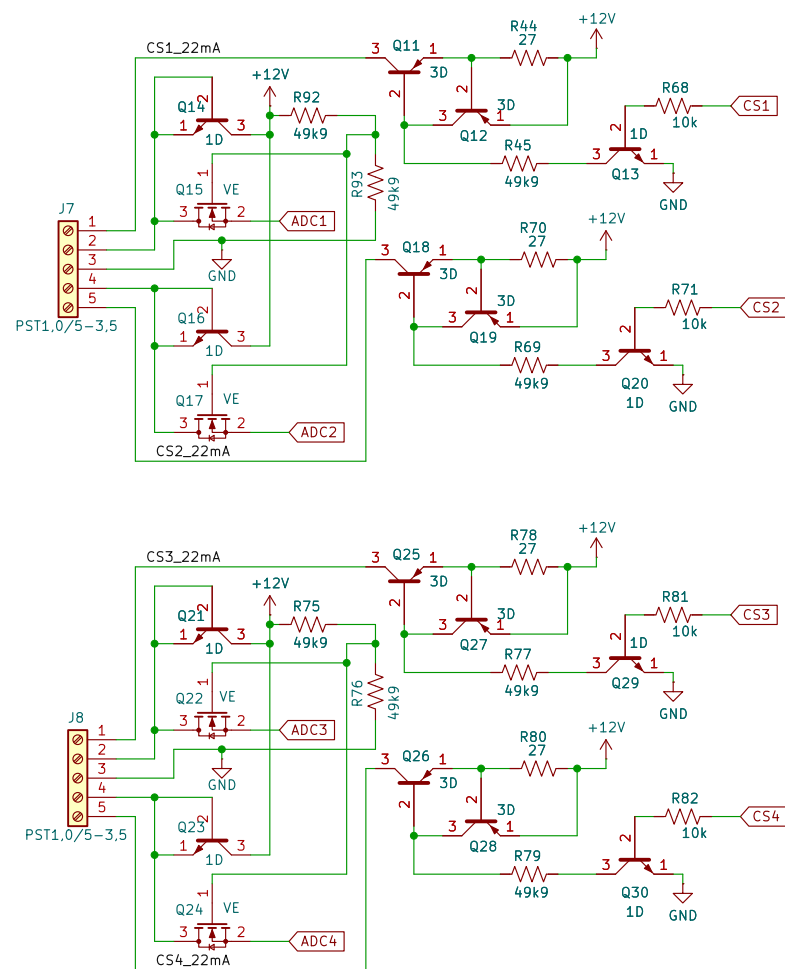

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland





Sheet: /Application Analog & Current Source/
File: App_ADC&CS.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A4
KiCad E.D.A. 10.0.1


Date:

Rev:
Id: 7/8

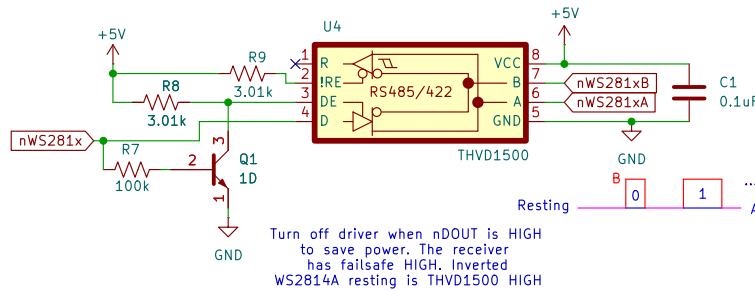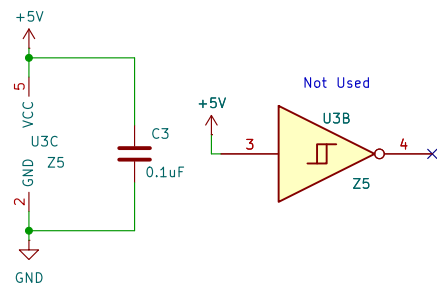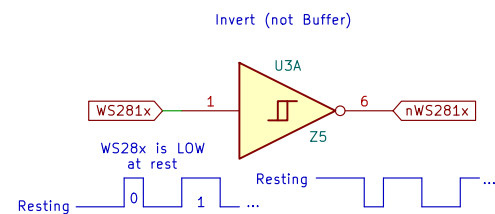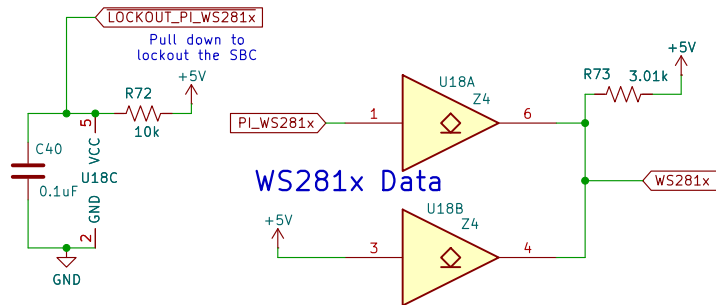

CAT5/CAT6 is by far the lowest cost, highest quality cabling option. Extend with "RJ45 Inline Couplers" with "POE++ rated"

<https://www.truecable.com/products/cat6-waterproof-couplers-shielded>

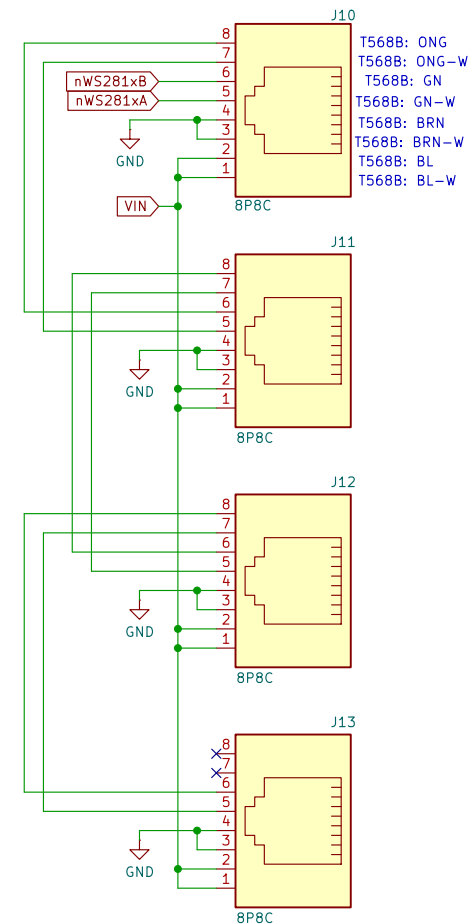

License: CERN-OHL-P
CERN Open Hardware Licence
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Lighting Headers/
File: LightingHdr.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A4
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 8/8