



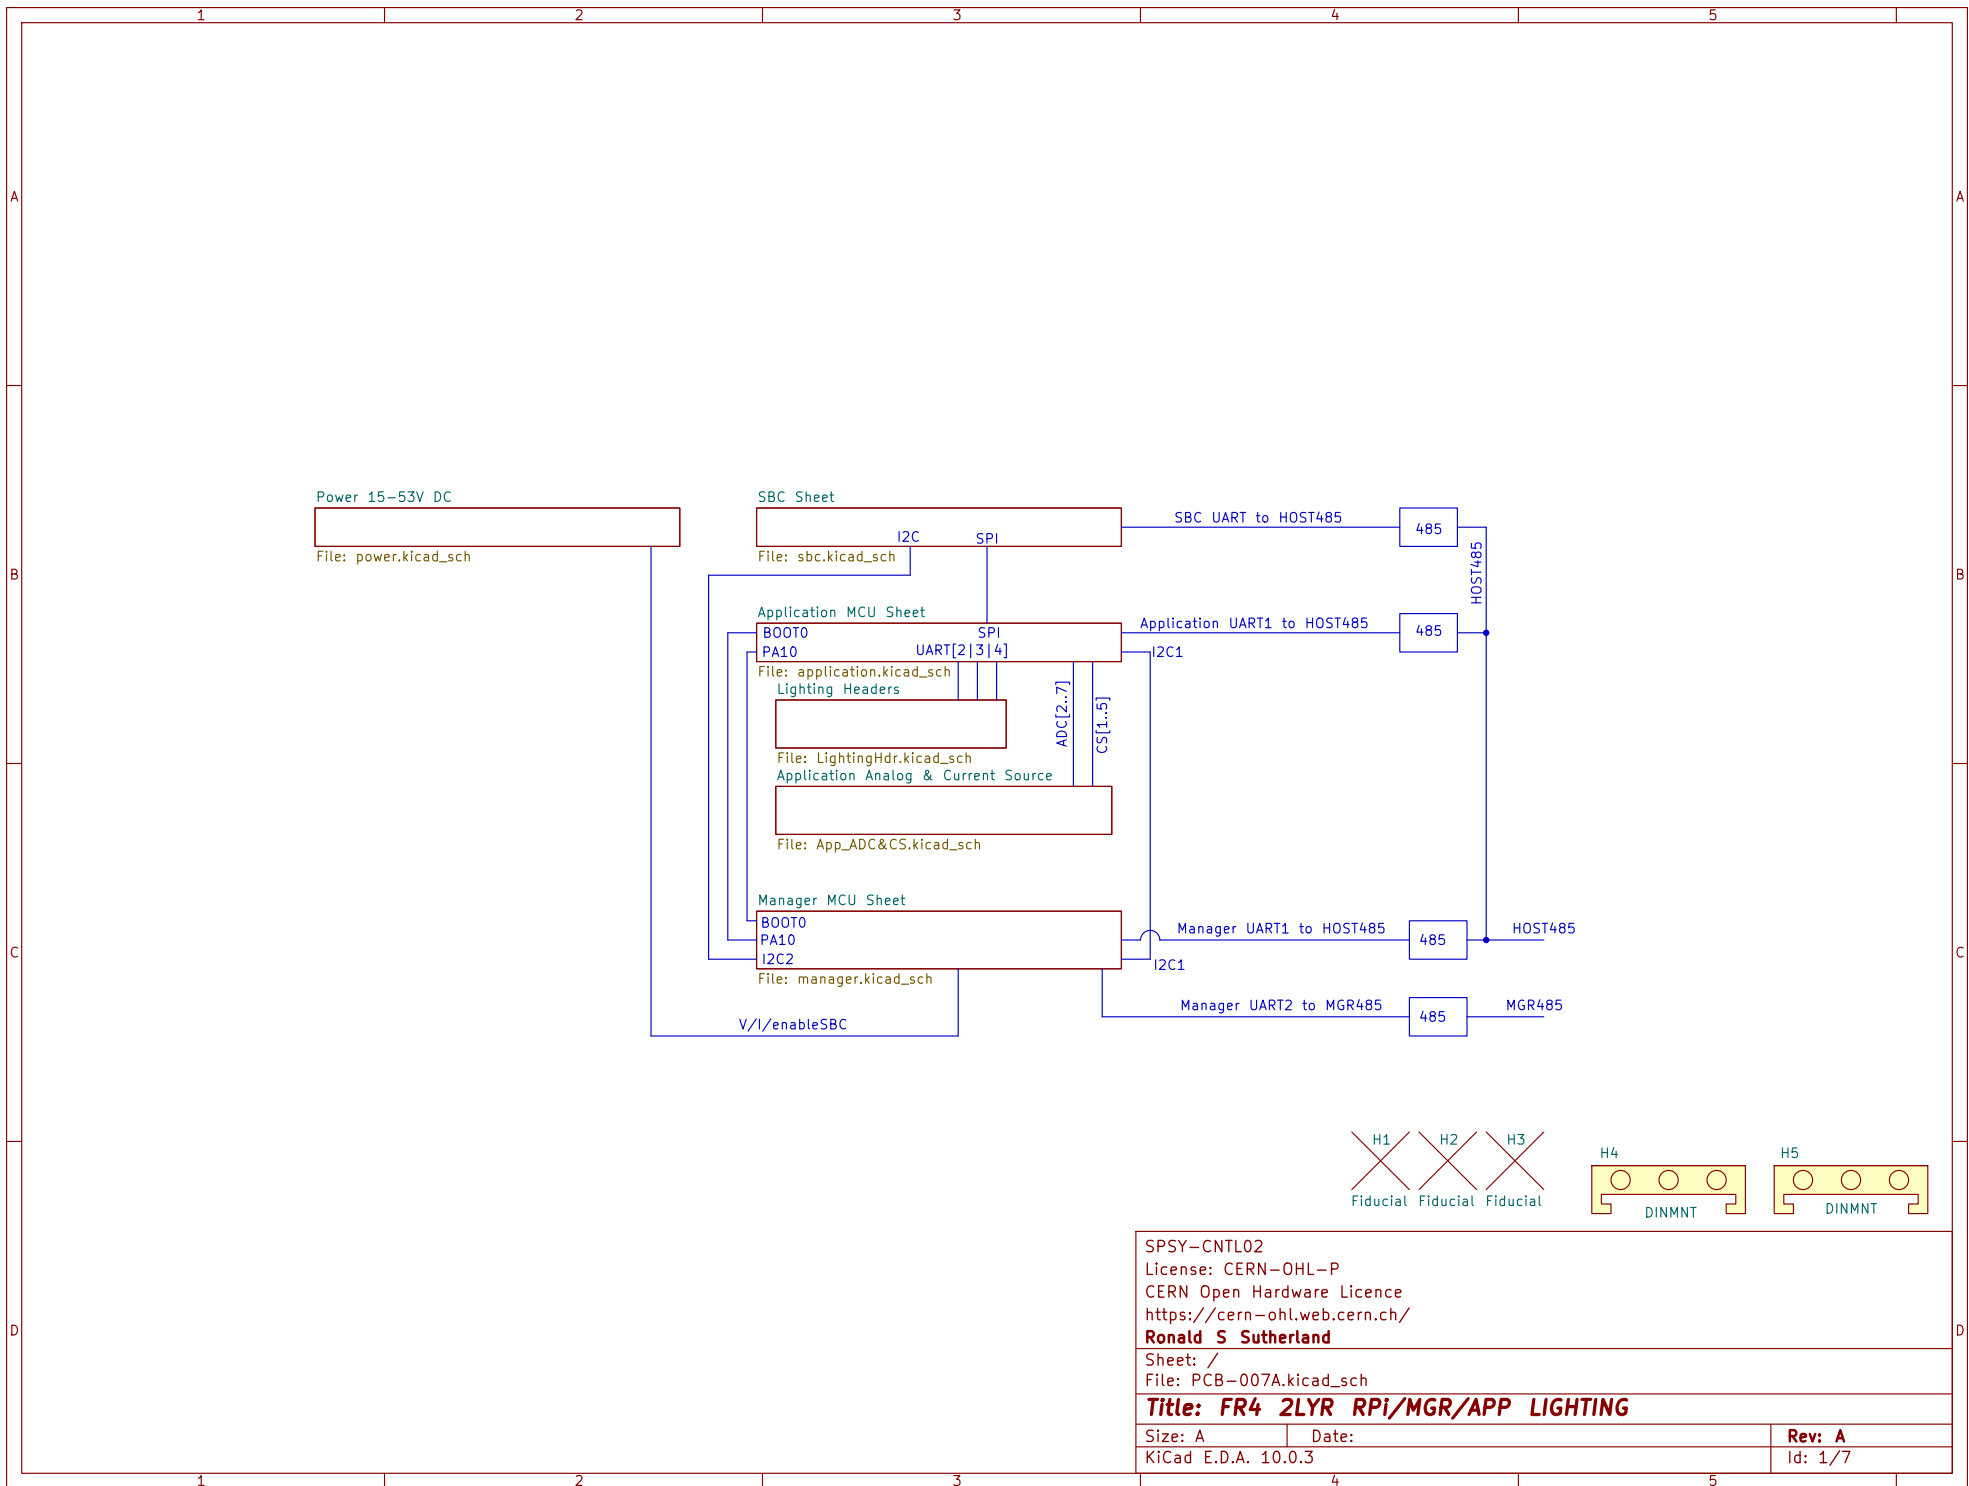


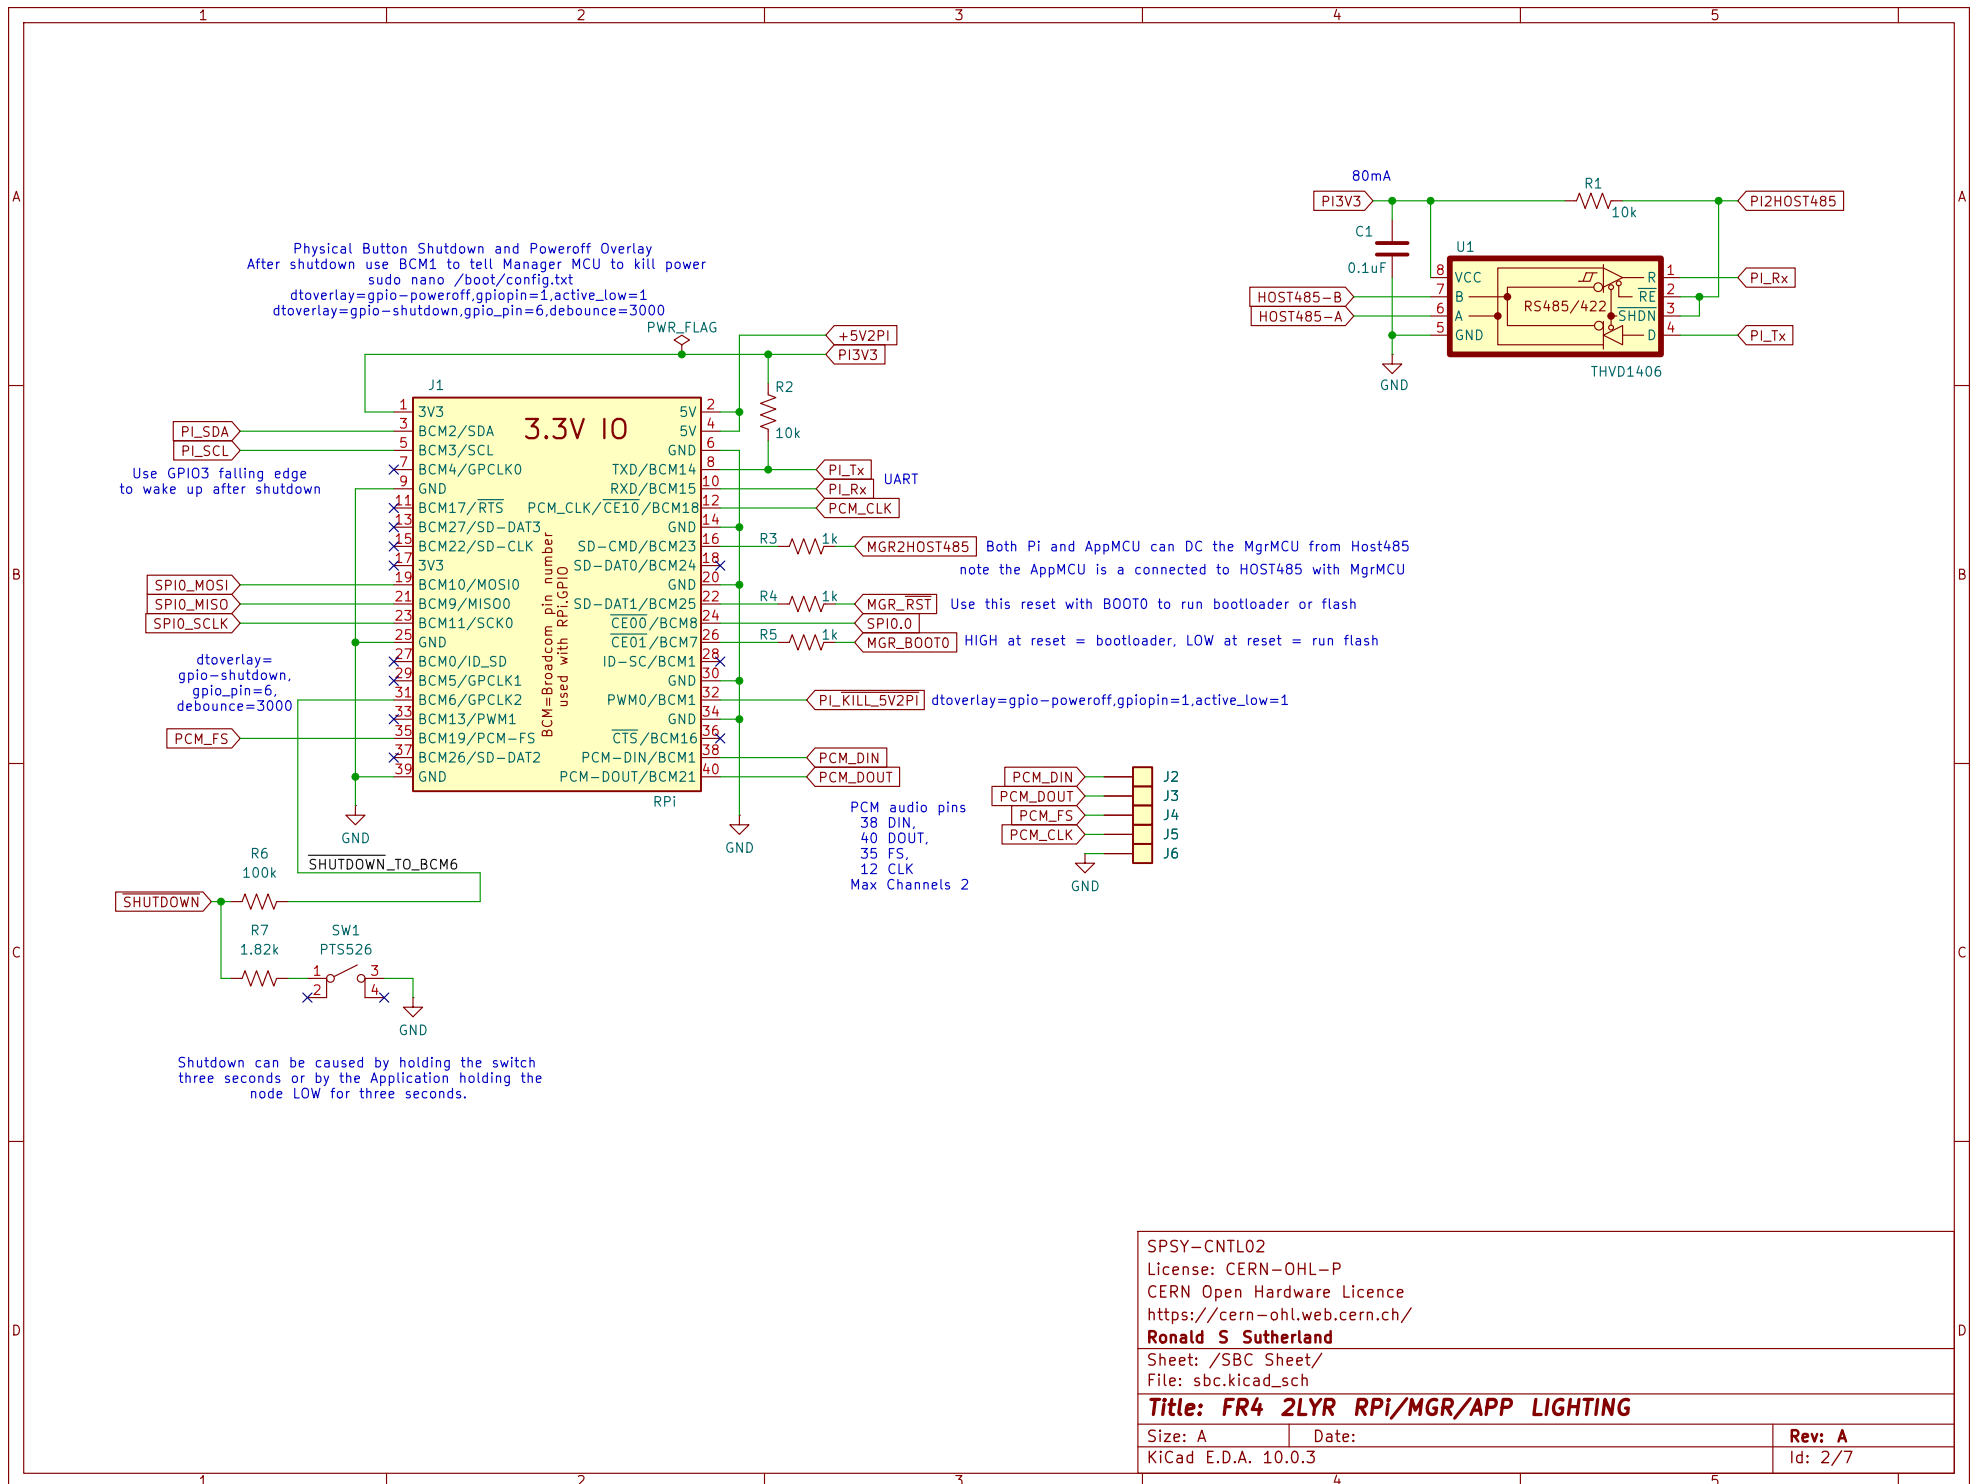

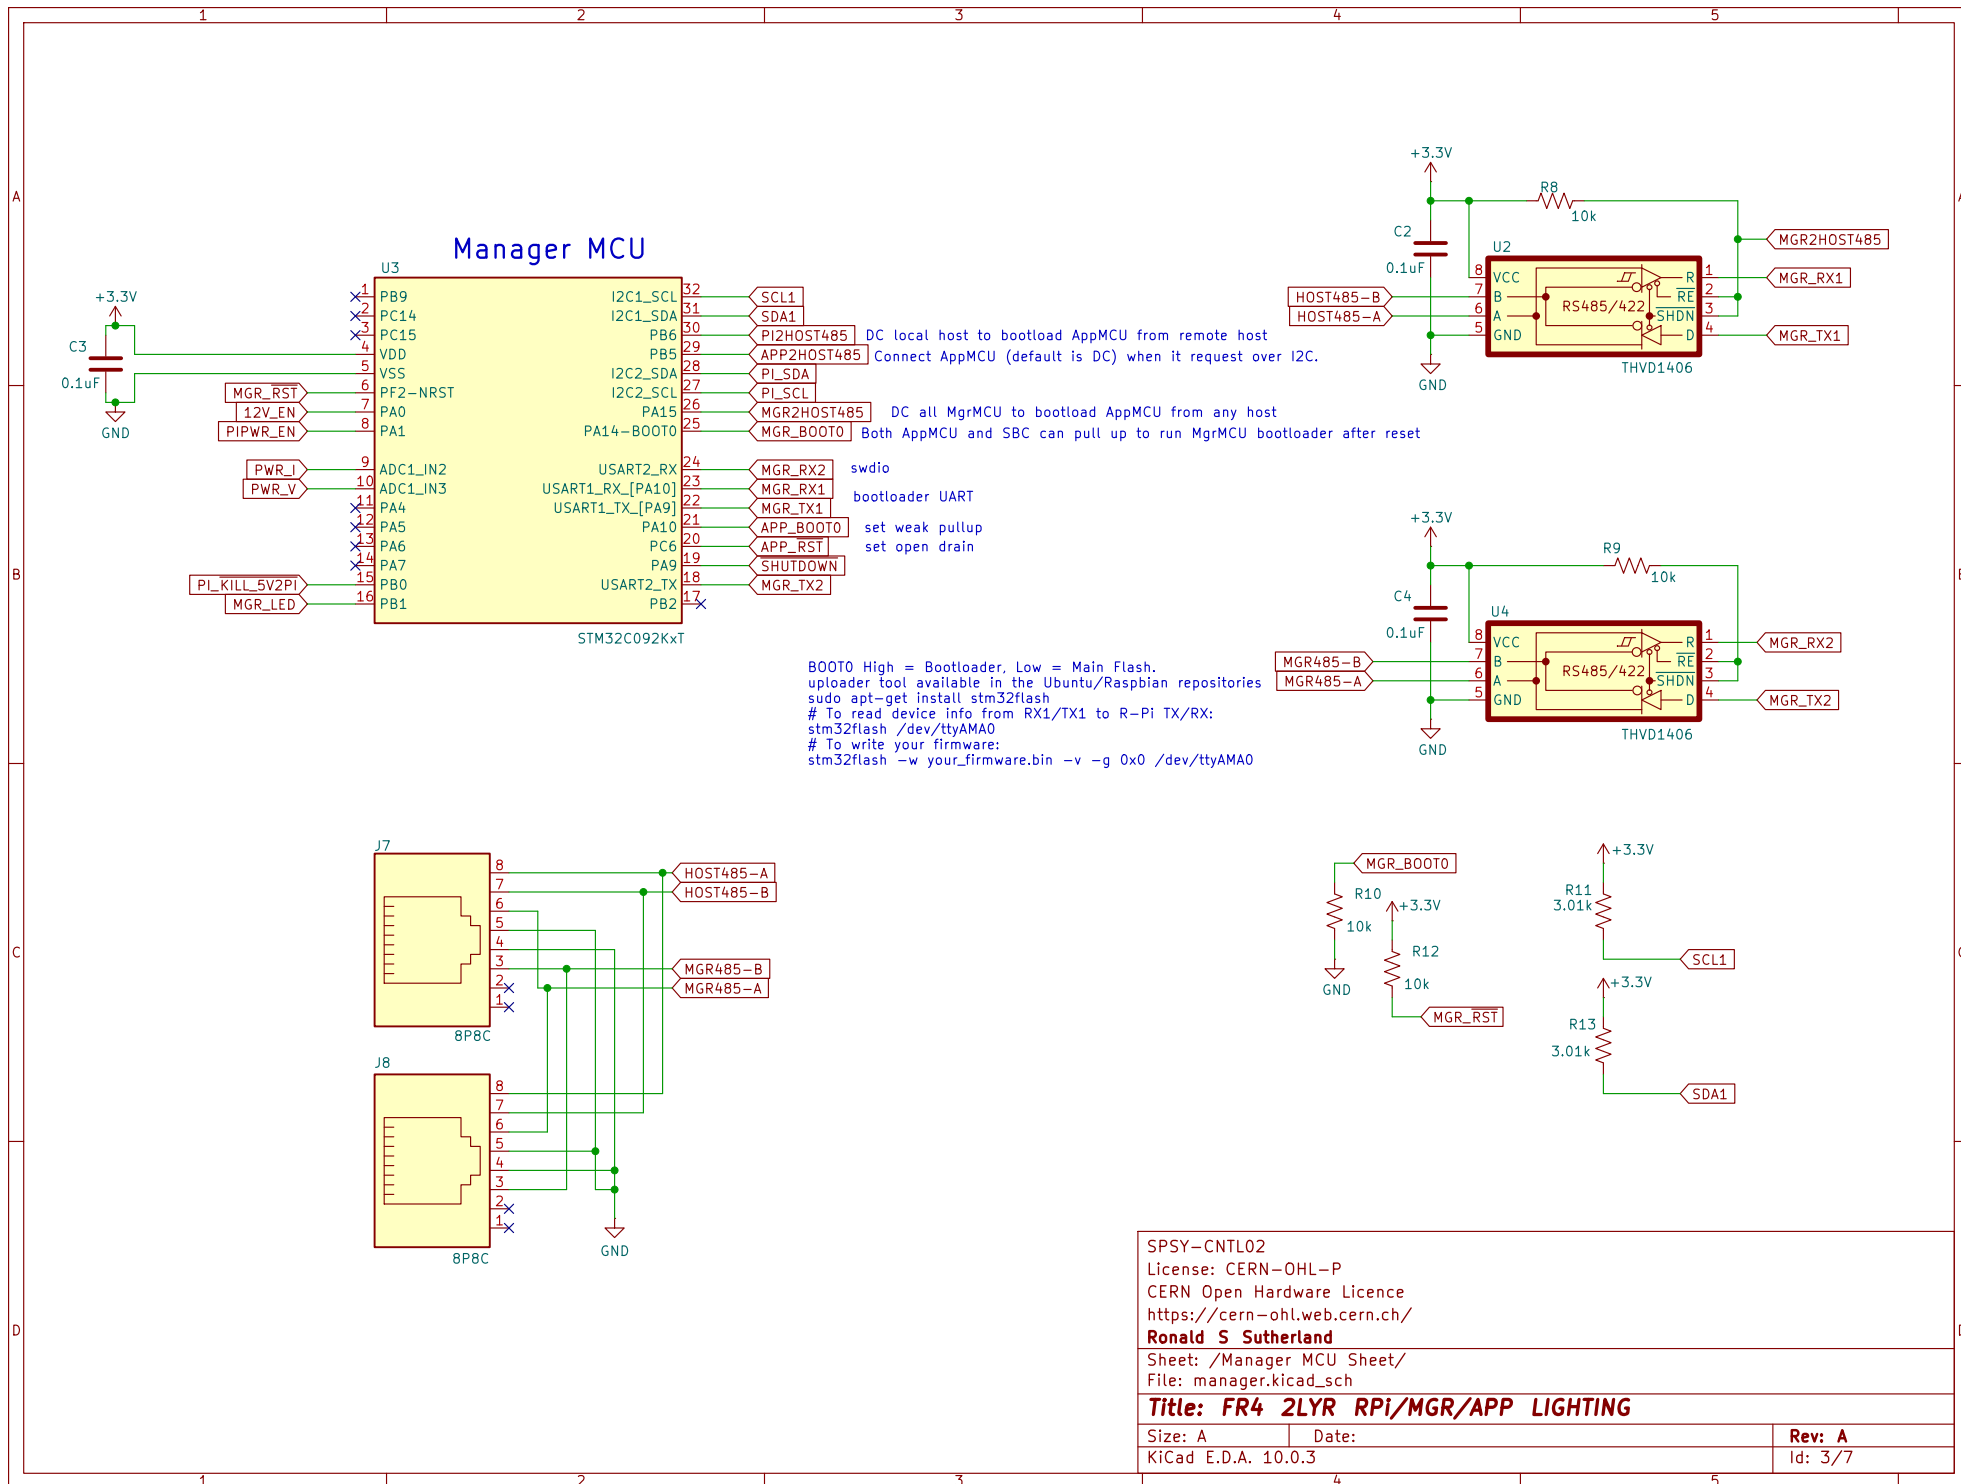


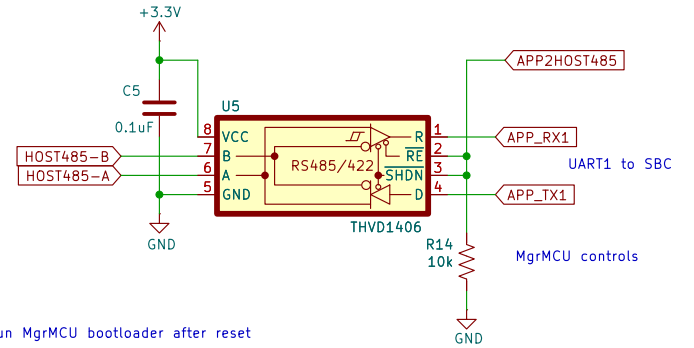


Application MCU

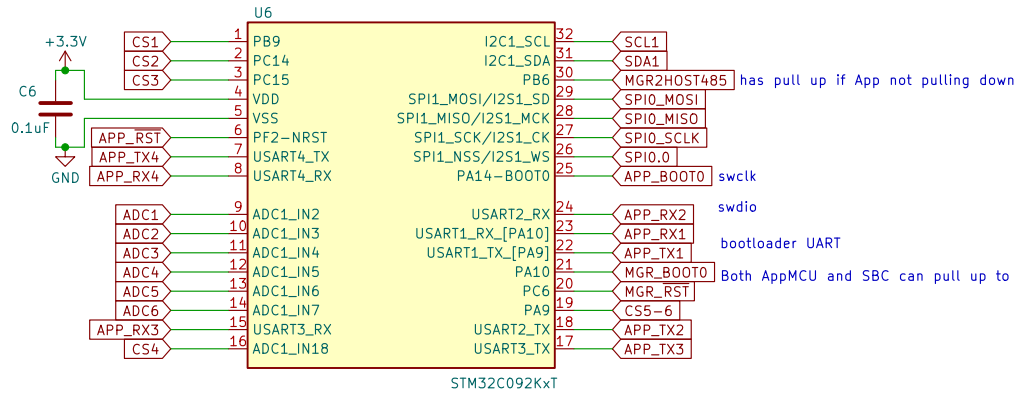

BOOT0 High = Bootloader, Low = Main Flash.
 uploader tool available in the Ubuntu/Raspbian repositories
 sudo apt-get install stm32flash
 # To read device info from RX1/TX1 to R-Pi TX/RX:
 stm32flash /dev/ttyAMA0
 # To write your firmware:
 stm32flash -w your_firmware.bin -v -g 0x0 /dev/ttyAMA0

I2C



SPSY-CNTL02

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Application MCU Sheet/

File: application.kicad_sch

Title: FR4 2LYR RPI/MGR/APP LIGHTING


Size: A

Date:

KiCad E.D.A. 10.0.3

Rev: A

Id: 4/7

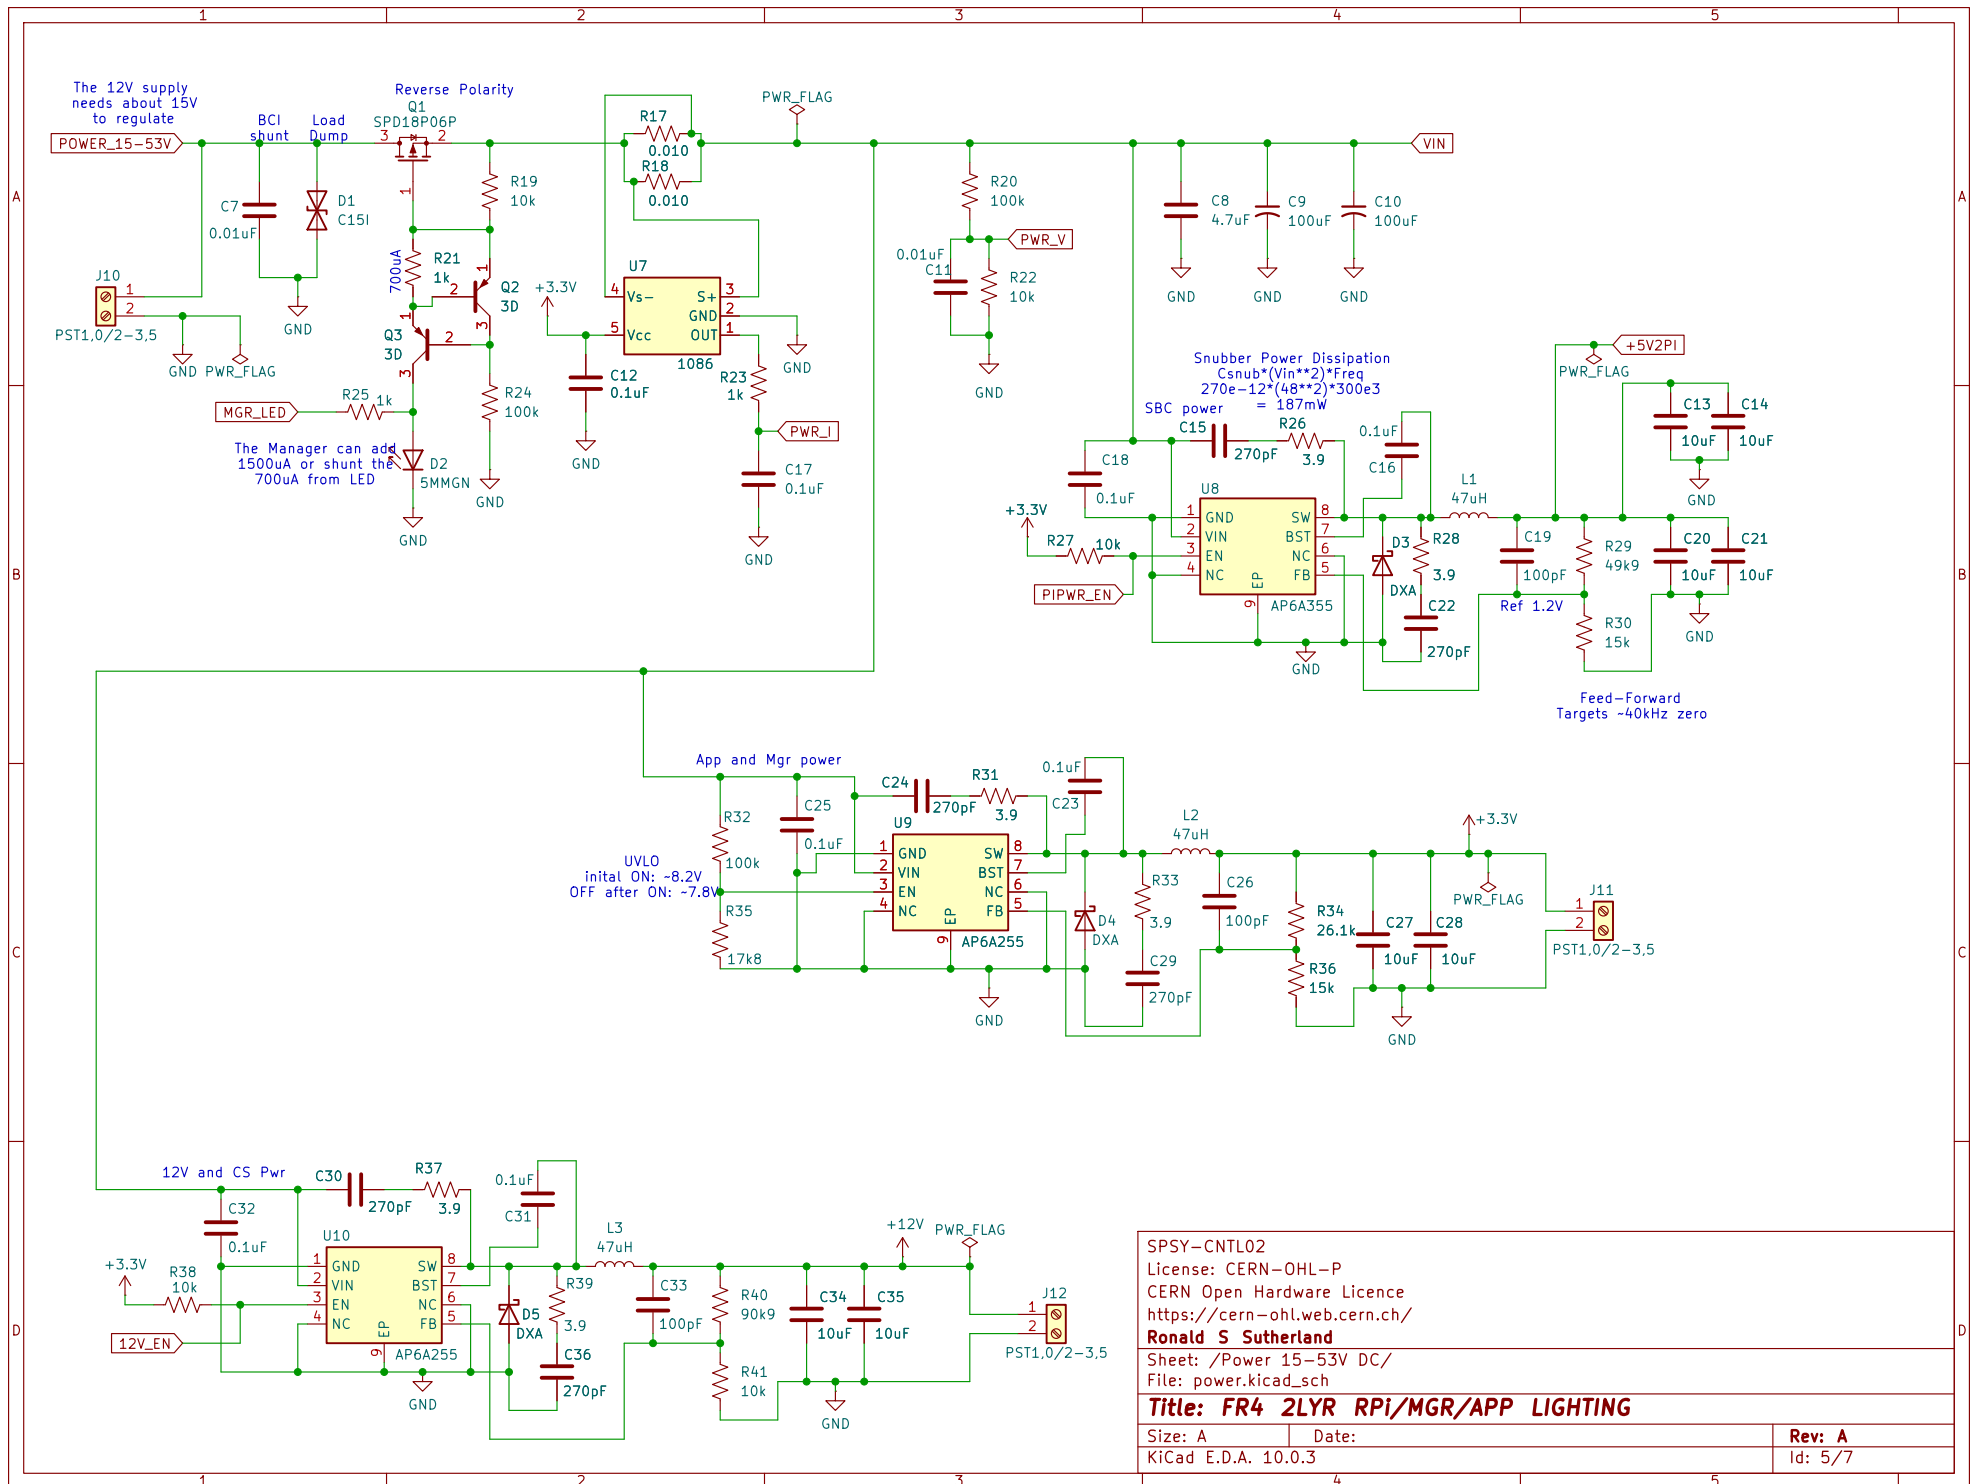

SPSY-CNTL02

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Power 15-53V DC/

File: power.kicad_sch

Title: FR4 2LYR RPI/MGR/APP LIGHTING



Size: A

Date:

Rev: A

KiCad E.D.A. 10.0.3

Id: 5/7

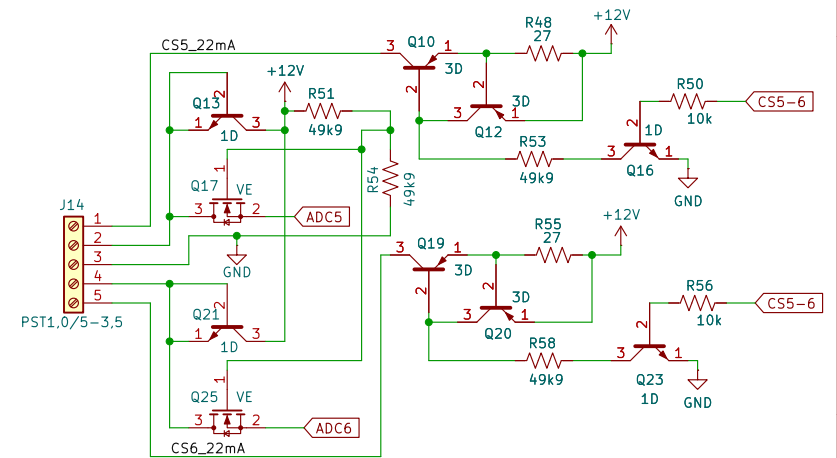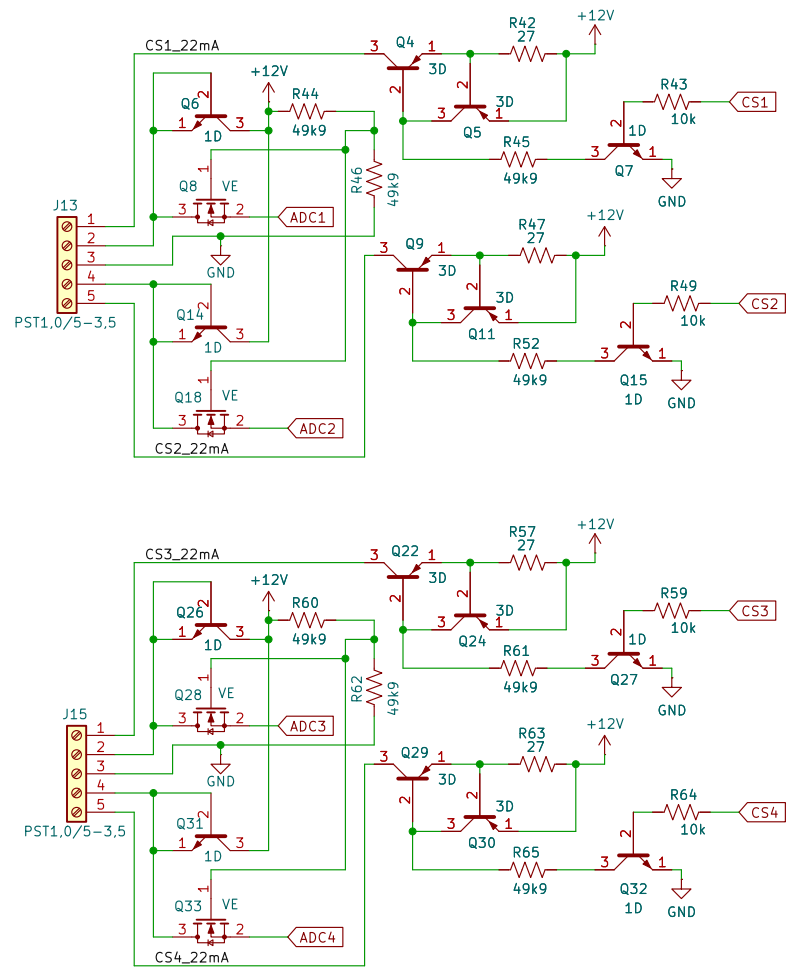

SPSY-CNTL02

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Application Analog & Current Source/

File: App_ADC&CS.kicad_sch

Title: FR4 2LYR RPI/MGR/APP LIGHTING

Size: A

Date:







KiCad E.D.A. 10.0.3

Rev: A

Id: 7/7

CAT5/CAT6 is by far the lowest cost,
highest quality cabling option.
Extend with "RJ45 Inline Couplers" with "POE++ rated"

<https://www.truecable.com/products/cat6-waterproof-couplers-shielded>

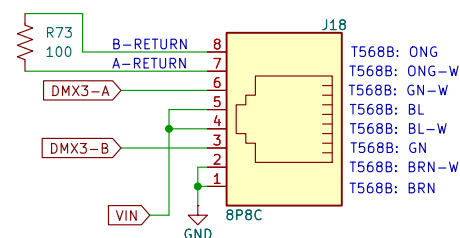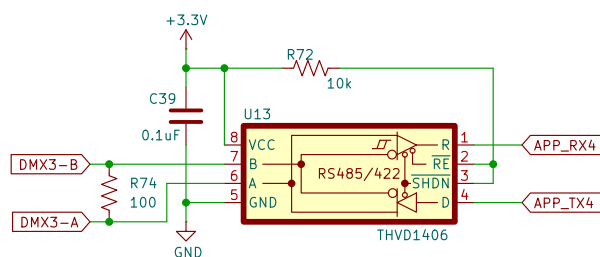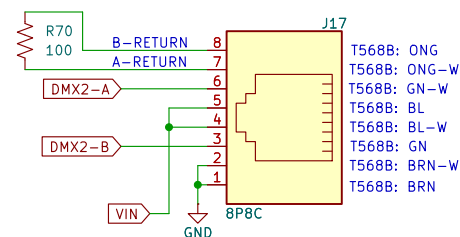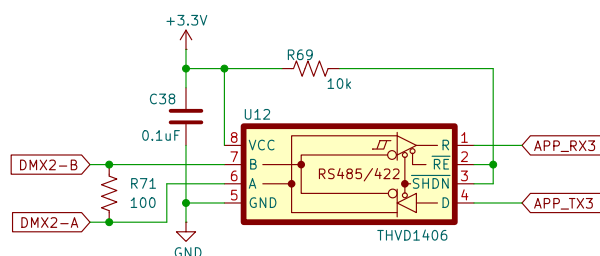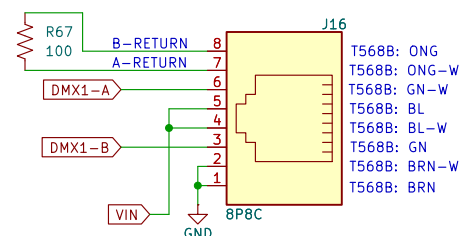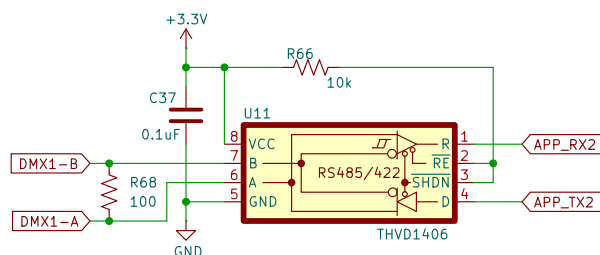

SPSY-CNTL02

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Lighting Headers/

File: LightingHdr.kicad_sch

Title: FR4 2LYR RPI/MGR/APP LIGHTING

Size: A

Date:

KiCad E.D.A. 10.0.3

Rev: A

Id: 8/7