



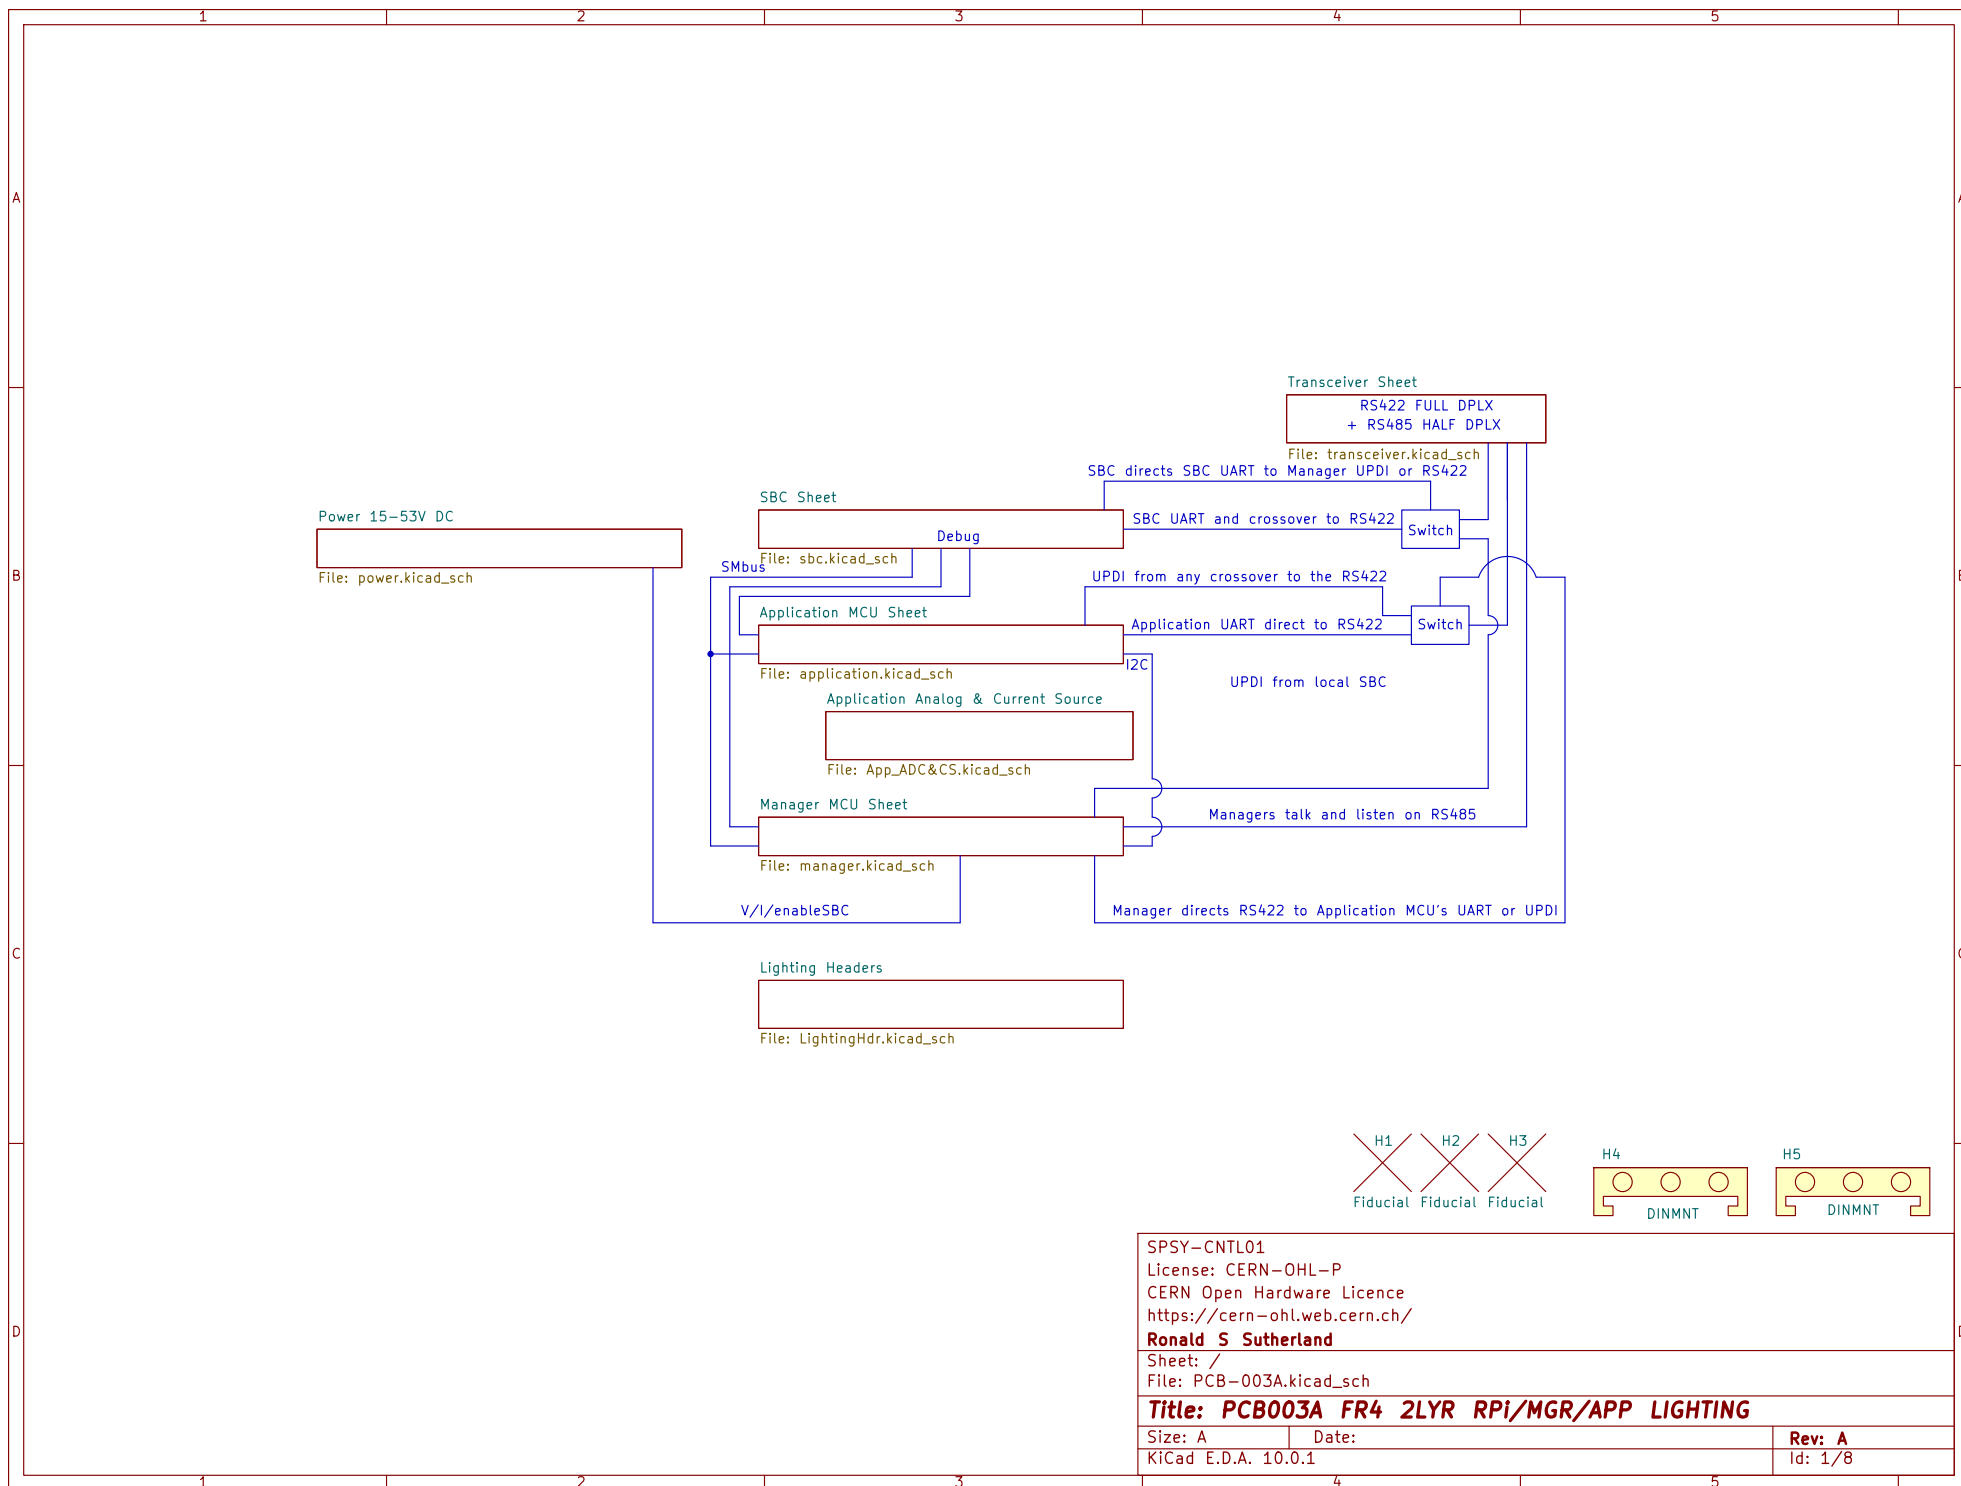


SPSY-CNTL01		
License: CERN-OHL-P		
CERN Open Hardware Licence		
https://cern-ohl.web.cern.ch/		
Ronald S Sutherland		
Sheet: /		
File: PCB-003A.kicad_sch		
Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING		
Size: A	Date:	Rev: A
KiCad E.D.A. 10.0.1		Id: 1/8

Physical Button Shutdown and Poweroff Overlay
After shutdown use BCM18 to tell Manager MCU to kill power
sudo nano /boot/config.txt
dtoverlay=gpio-poweroff,gpiopin=18,active_low=1
dtoverlay=gpio-shutdown,gpio_pin=6,debounce=3000

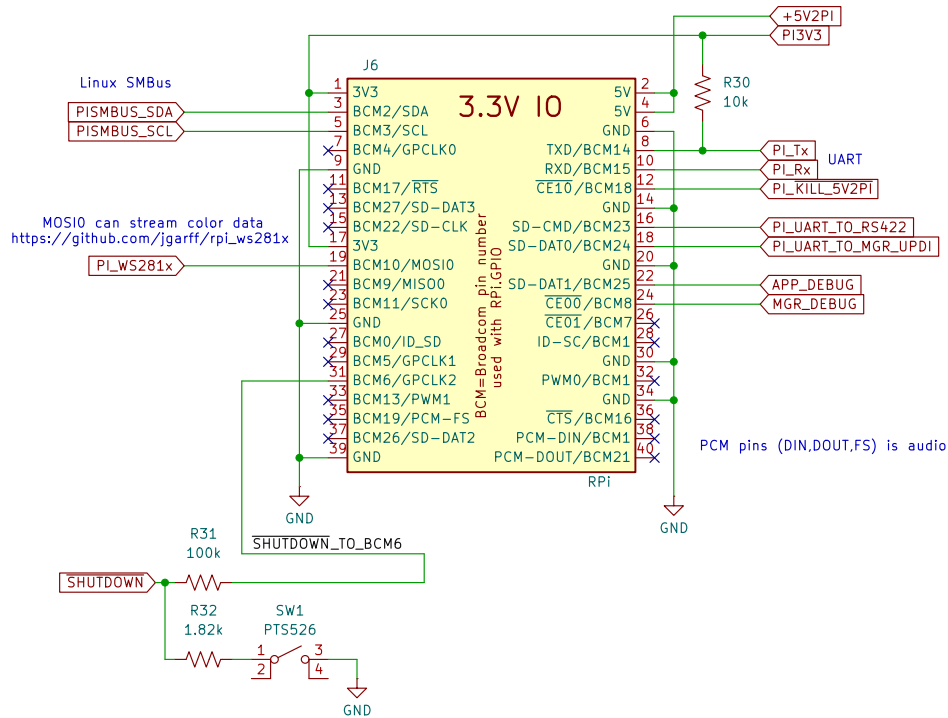

Shutdown can be caused by holding the switch three seconds or by the Application holding the node LOW for three seconds.

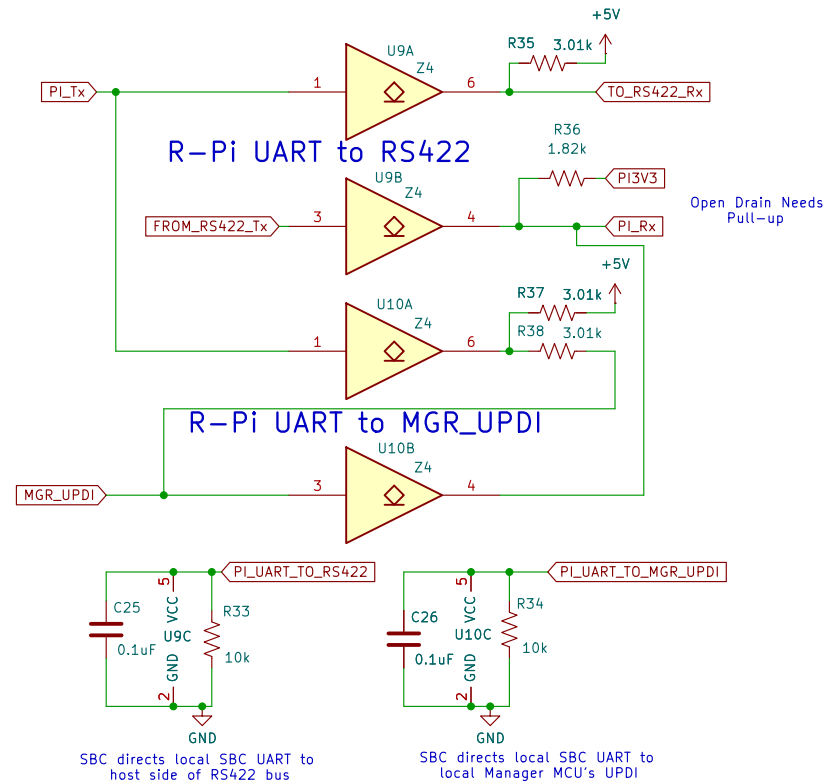

SPSY-CNTL01

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /SBC Sheet/

File: sbc.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A


Date:

KiCad E.D.A. 10.0.1


Rev: A

Id: 2/8


Manager MCU

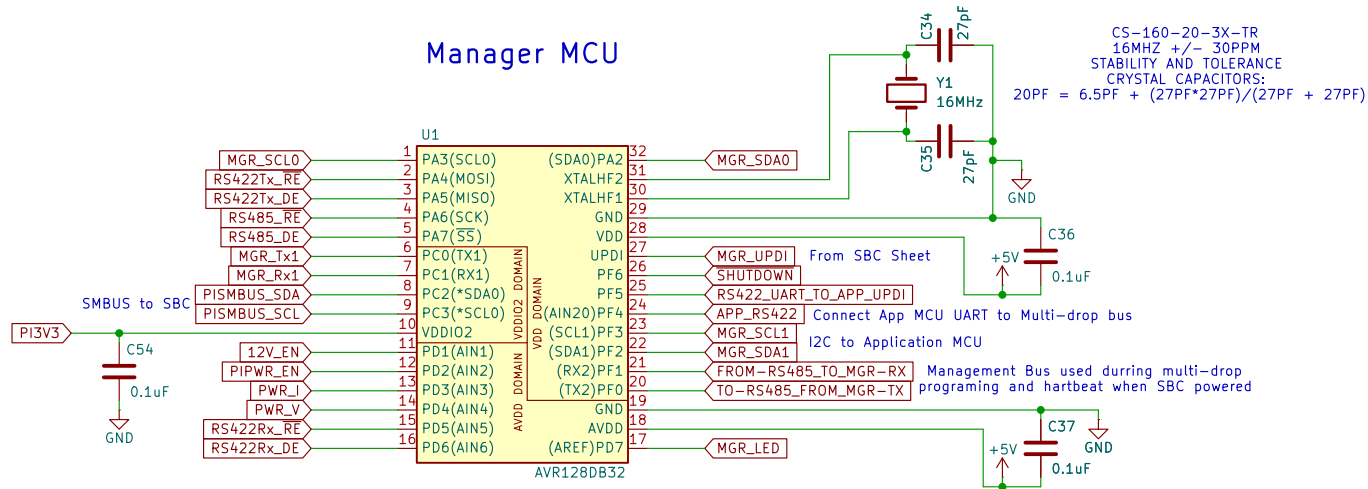

Manager I2C Application I2C

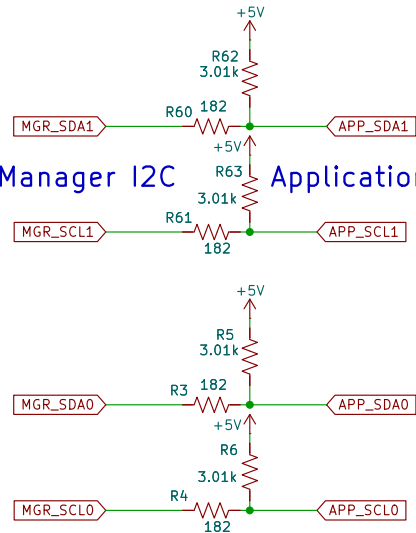

Application Debug UART to SBC

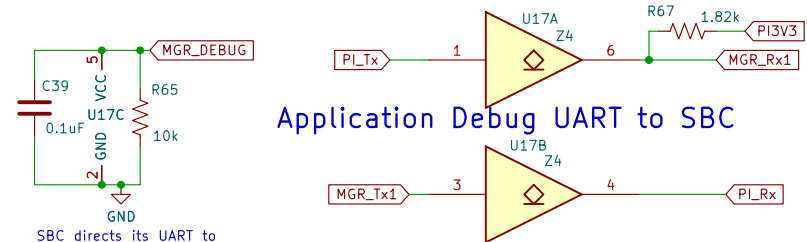

SPSY-CNTL01

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Manager MCU Sheet/

File: manager.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING


Size: A


Date:


KiCad E.D.A. 10.0.1

Rev: A



Id: 3/8

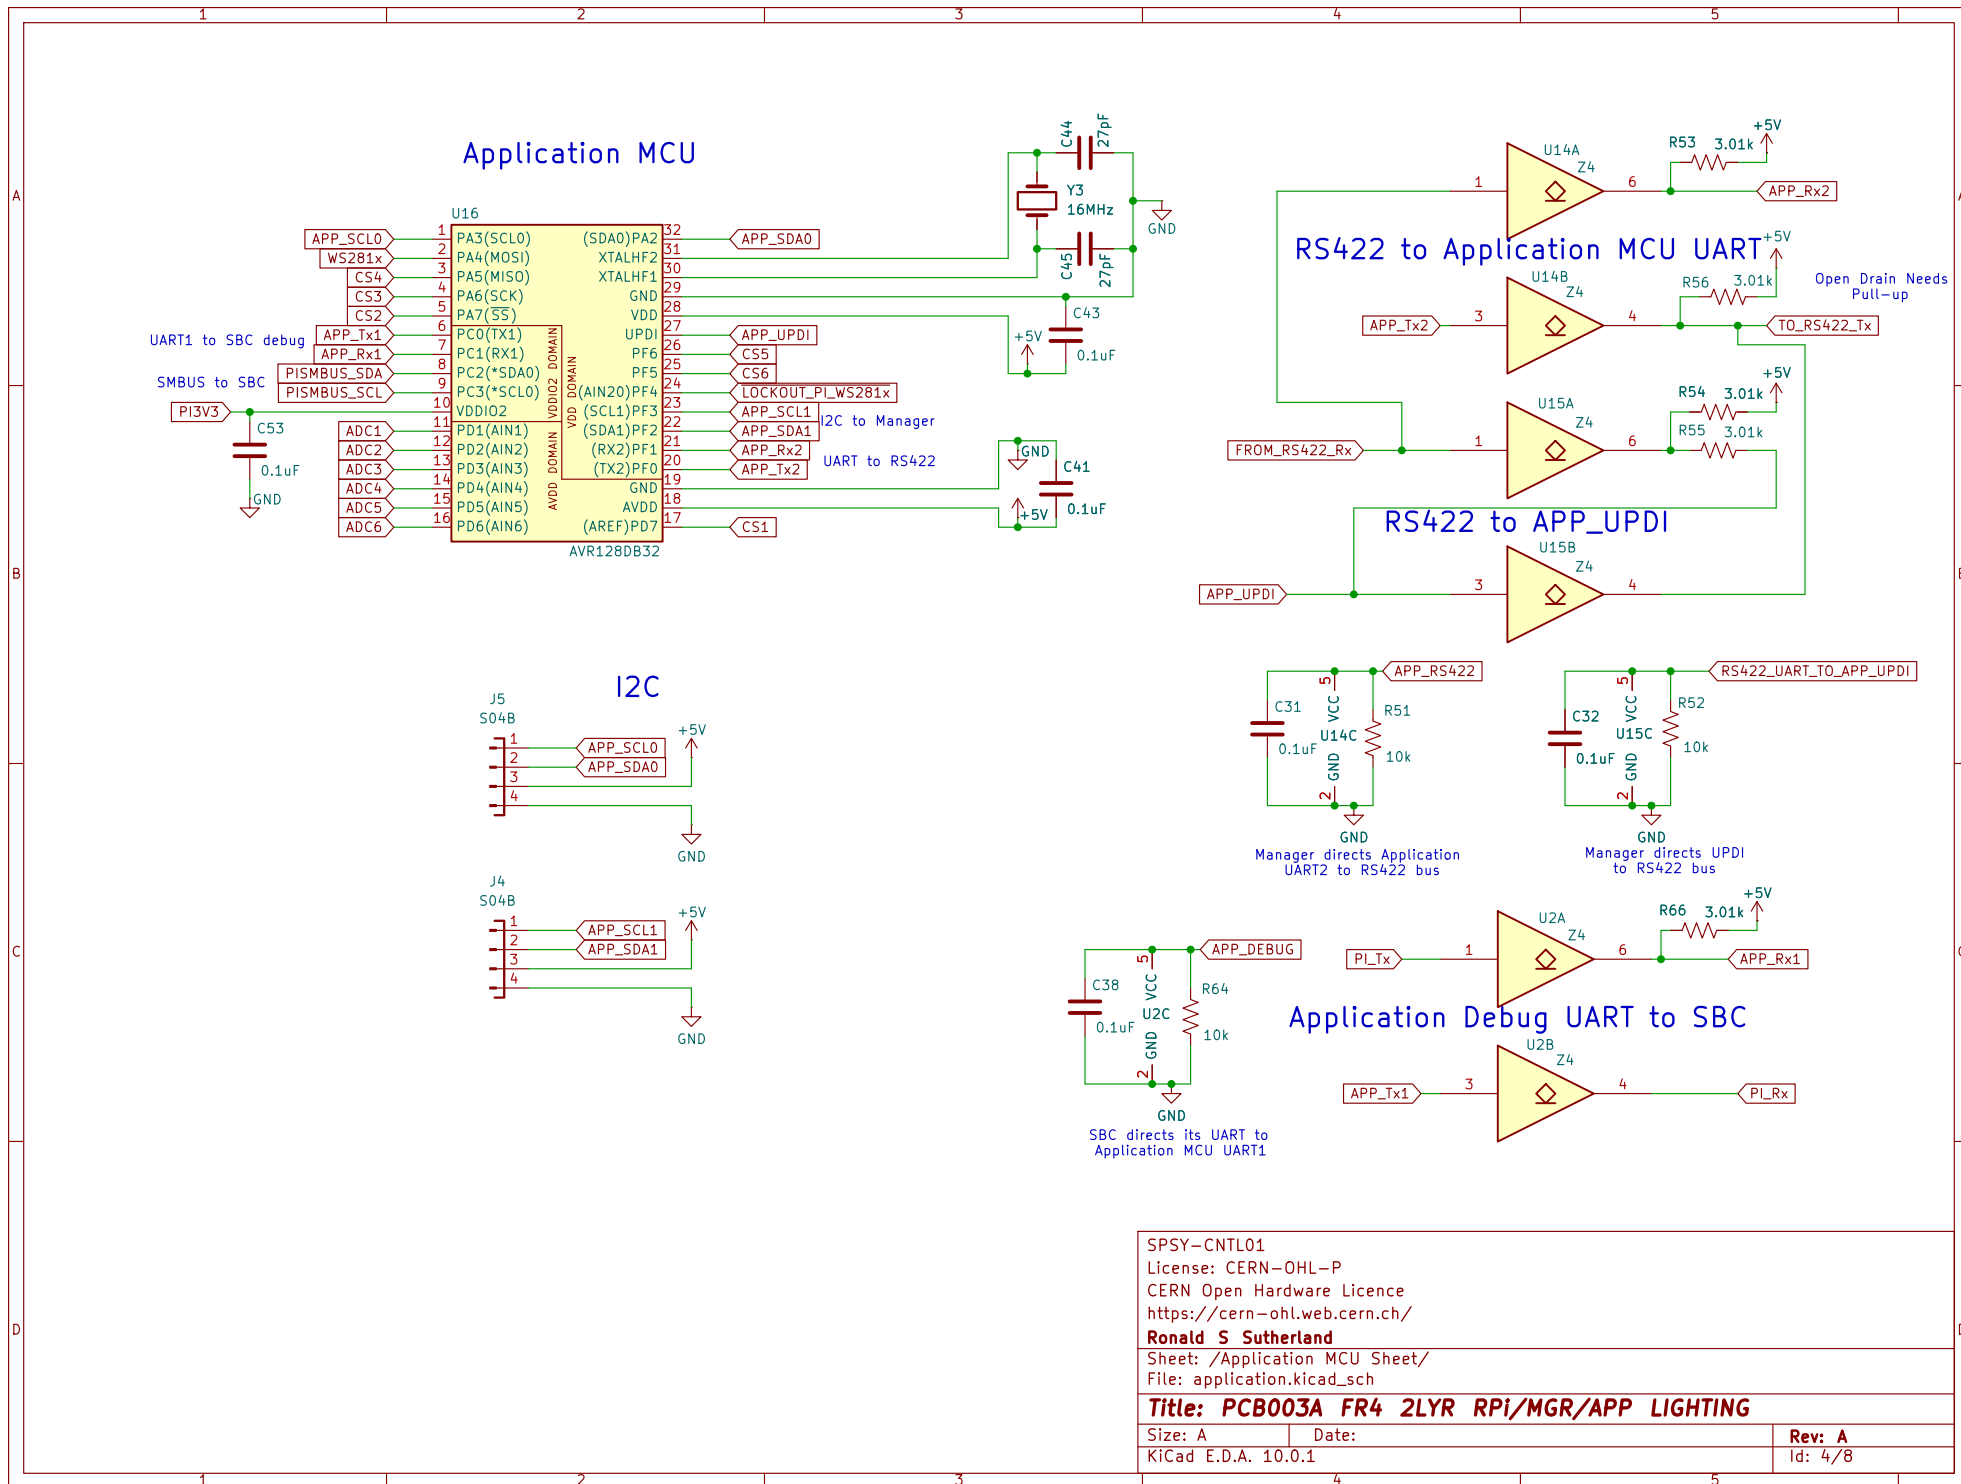

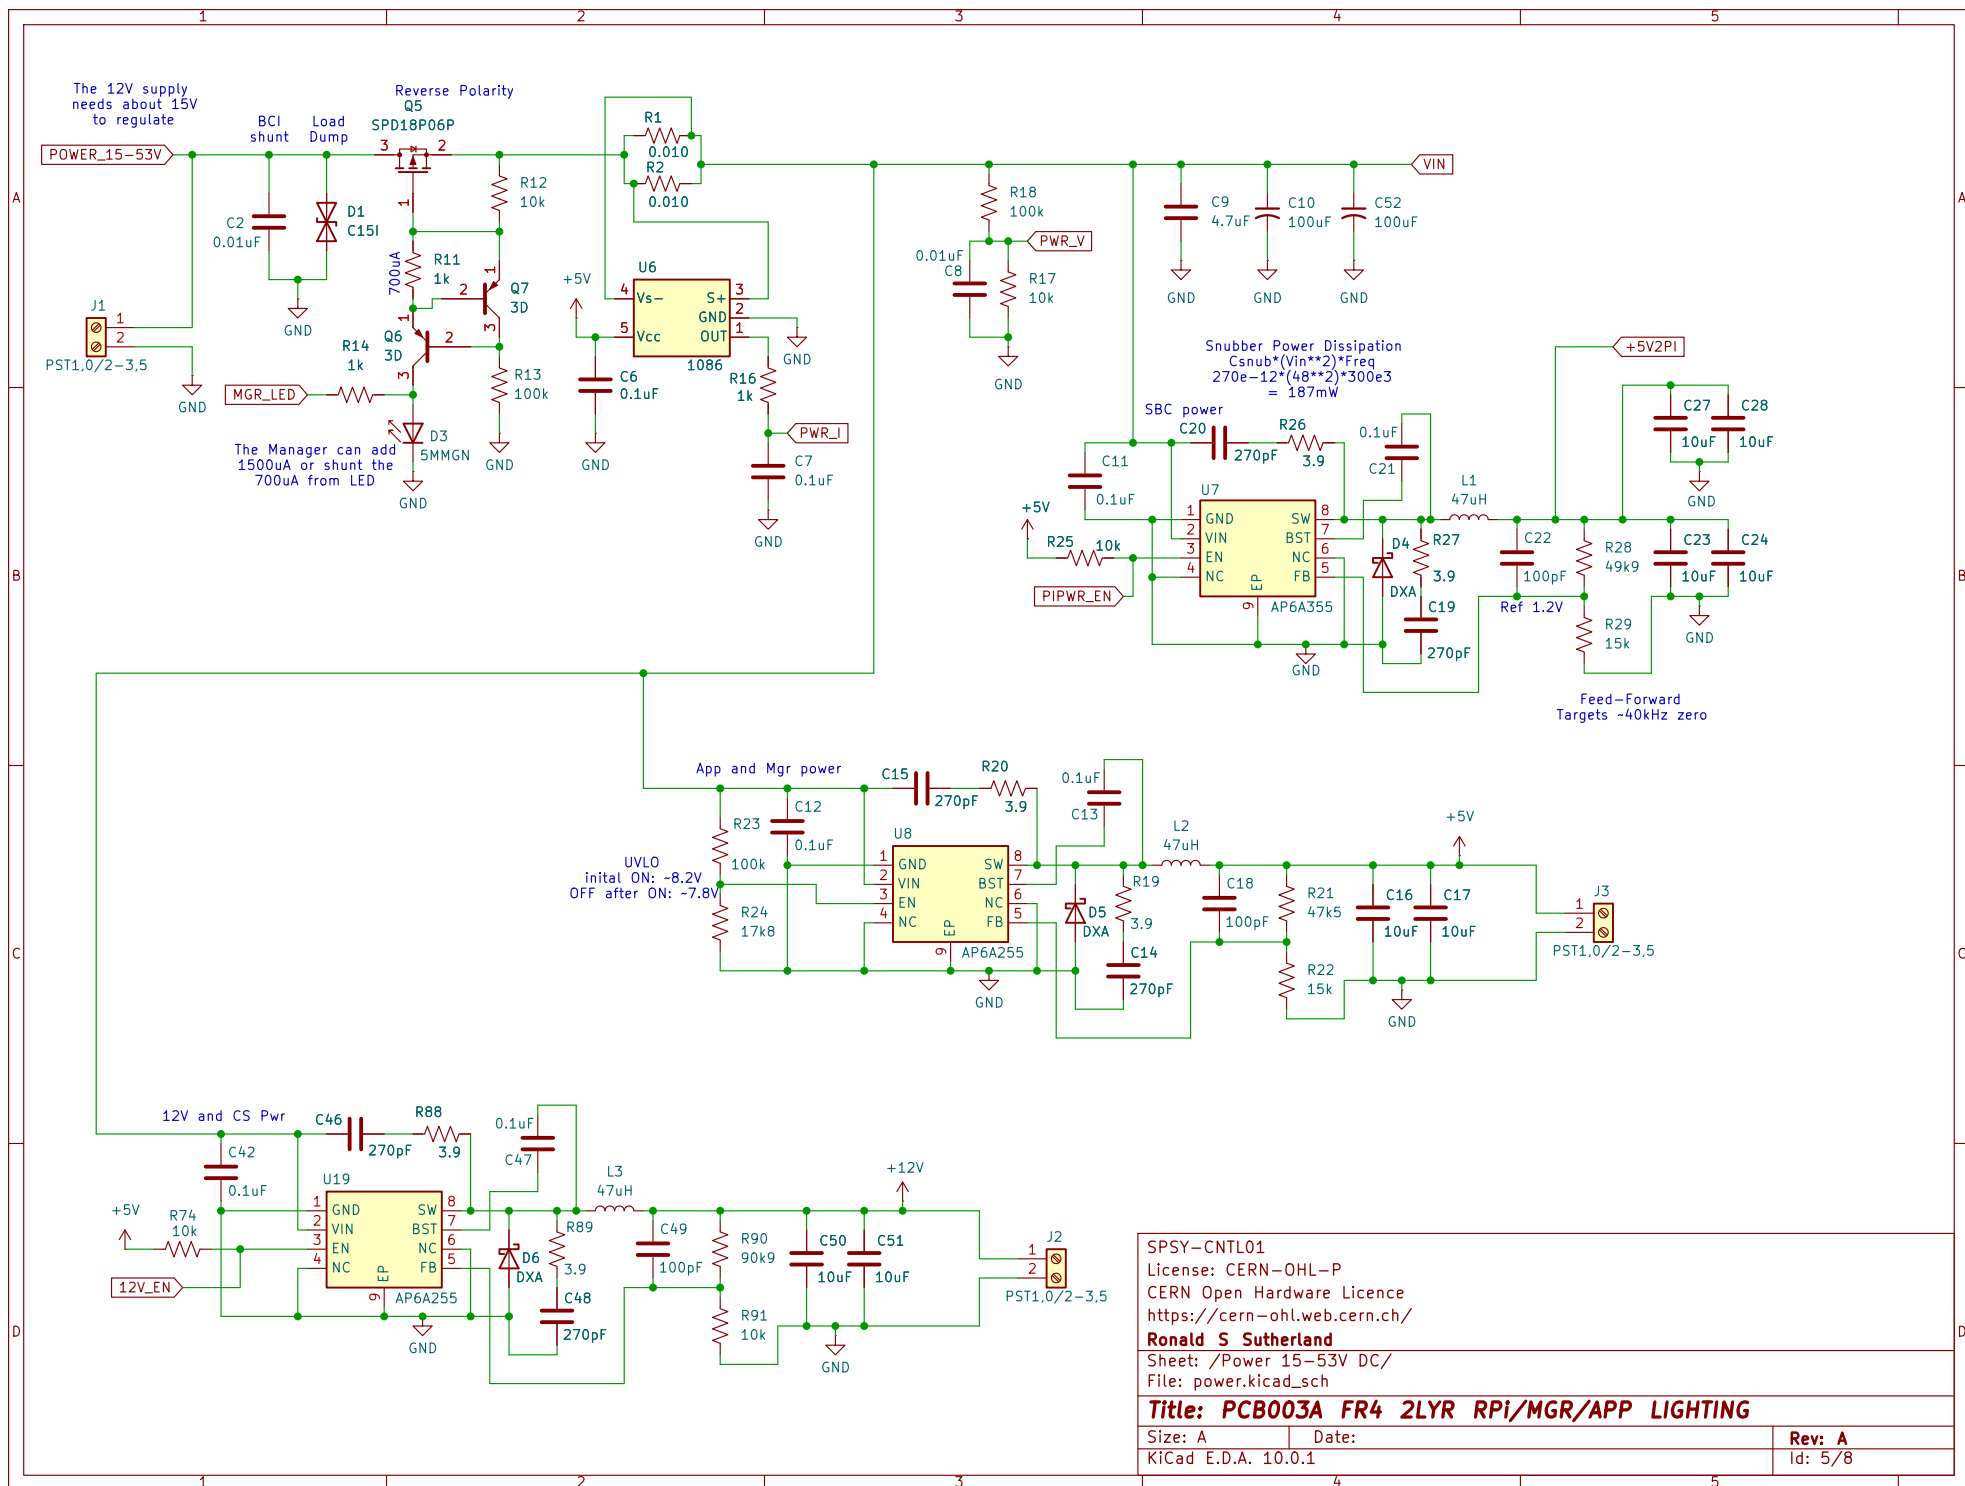

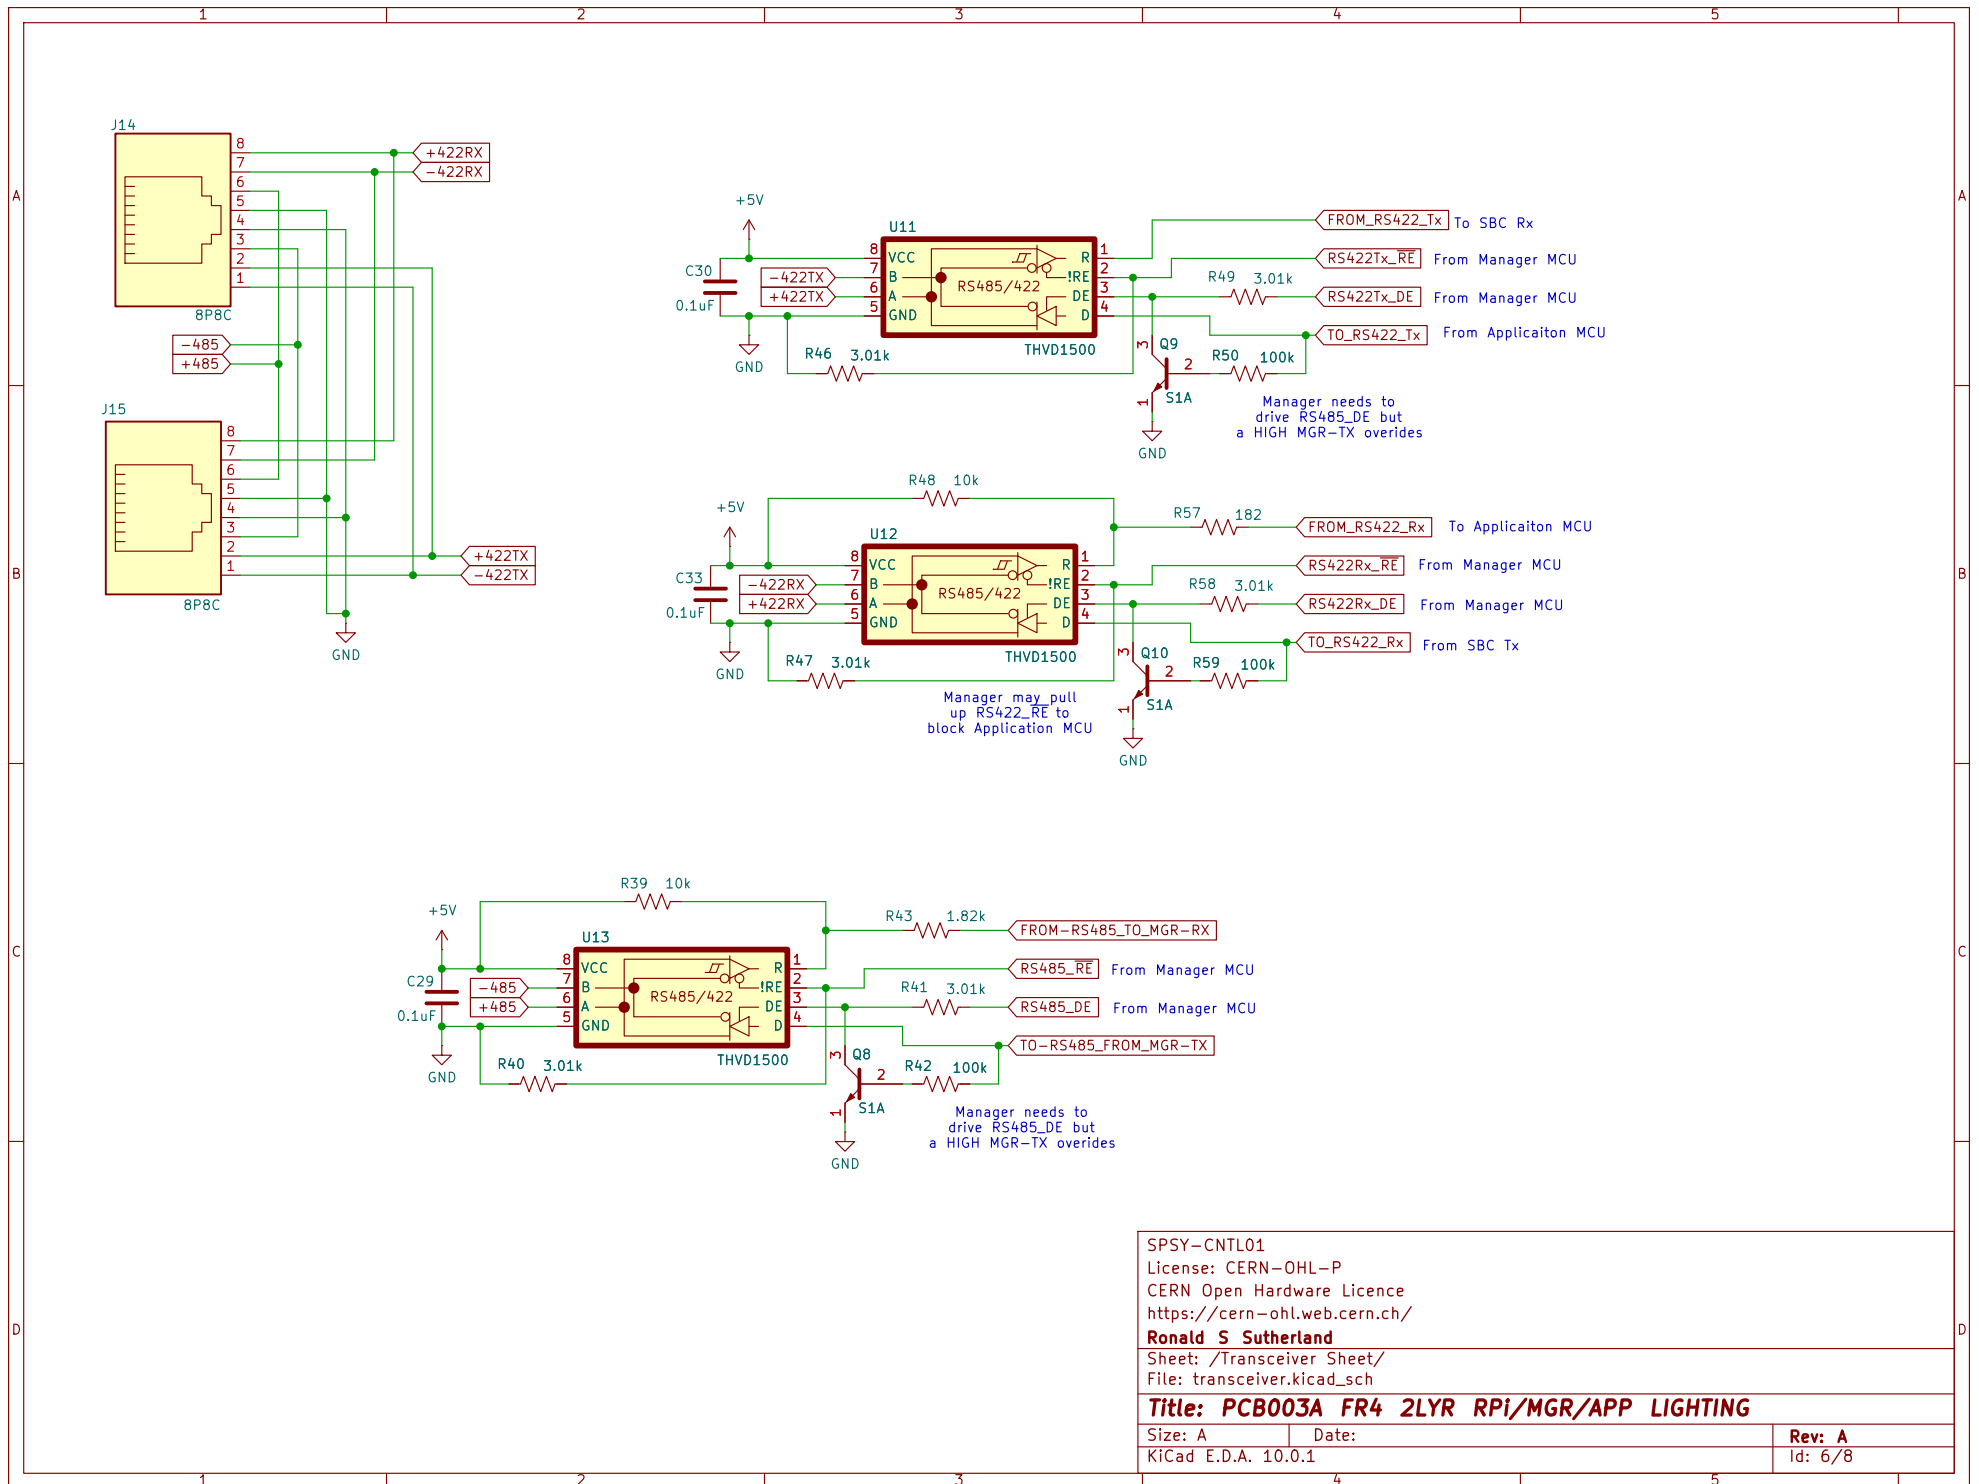

SPSY-CNTL01	
License: CERN-OHL-P	
CERN Open Hardware Licence	
https://cern-ohl.web.cern.ch/	
Ronald S Sutherland	
Sheet: /Transceiver Sheet/	
File: transceiver.kicad_sch	
Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING	
Size: A	Date:
KiCad E.D.A. 10.0.1	Rev: A
	Id: 6/8

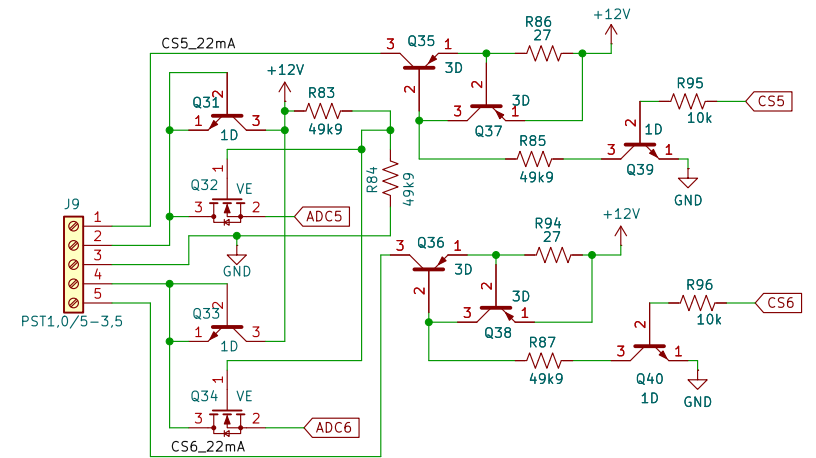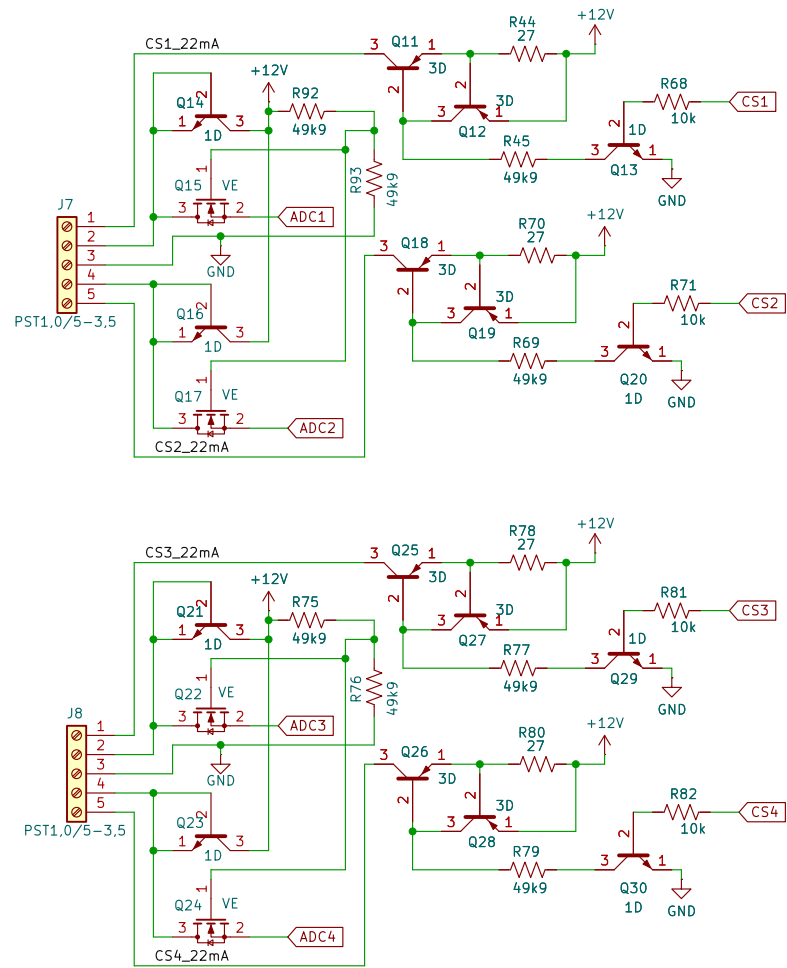

SPSY-CNTL01

License: CERN-OHL-P

CERN Open Hardware Licence

<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /Application Analog & Current Source/

File: App_ADC&CS.kicad_sch

Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING


Size: A

Date:




Rev: A

KiCad E.D.A. 10.0.1

Id: 7/8

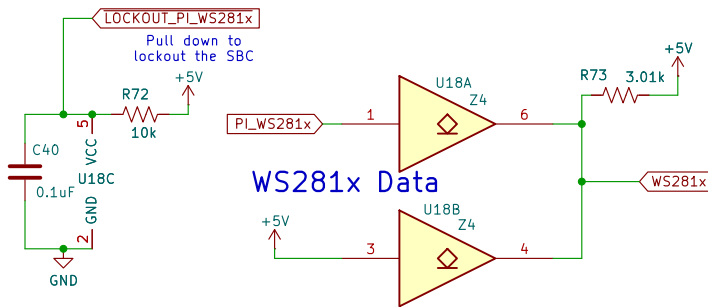


WS281x Data

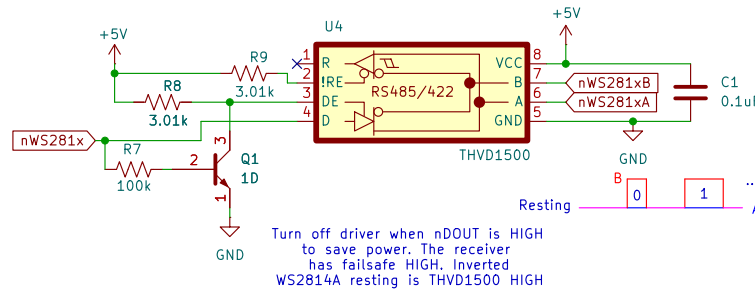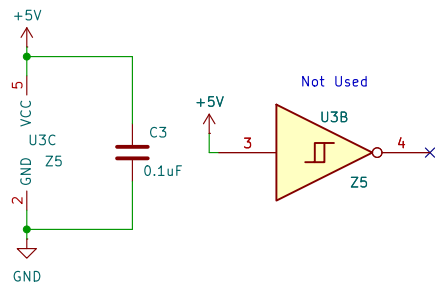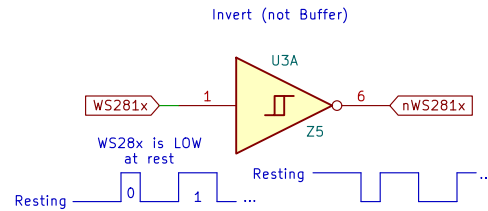

Turn off driver when nDOUT is HIGH to save power. The receiver has failsafe HIGH. Inverted WS2814A resting is THVD1500 HIGH

CAT5/CAT6 is by far the lowest cost, highest quality cabling option. Extend with "RJ45 Inline Couplers" with "POE++ rated"

<https://www.truecable.com/products/cat6-waterproof-couplers-shielded>

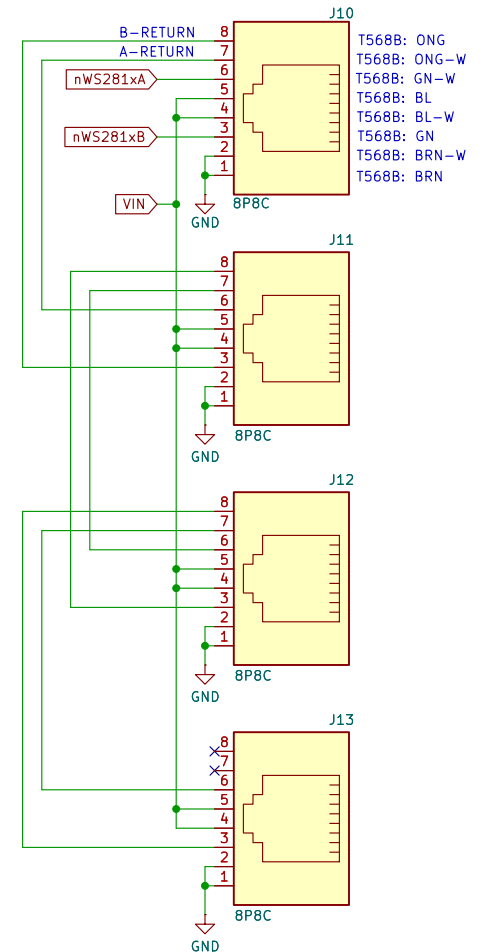

SPSY-CNTL01		D
License: CERN-OHL-P		
CERN Open Hardware Licence		
https://cern-ohl.web.cern.ch/		
Ronald S Sutherland		
Sheet: /Lighting Headers/		
File: LightingHdr.kicad_sch		
Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING		
Size: A	Date:	Rev: A
KiCad E.D.A. 10.0.1		Id: 8/8