


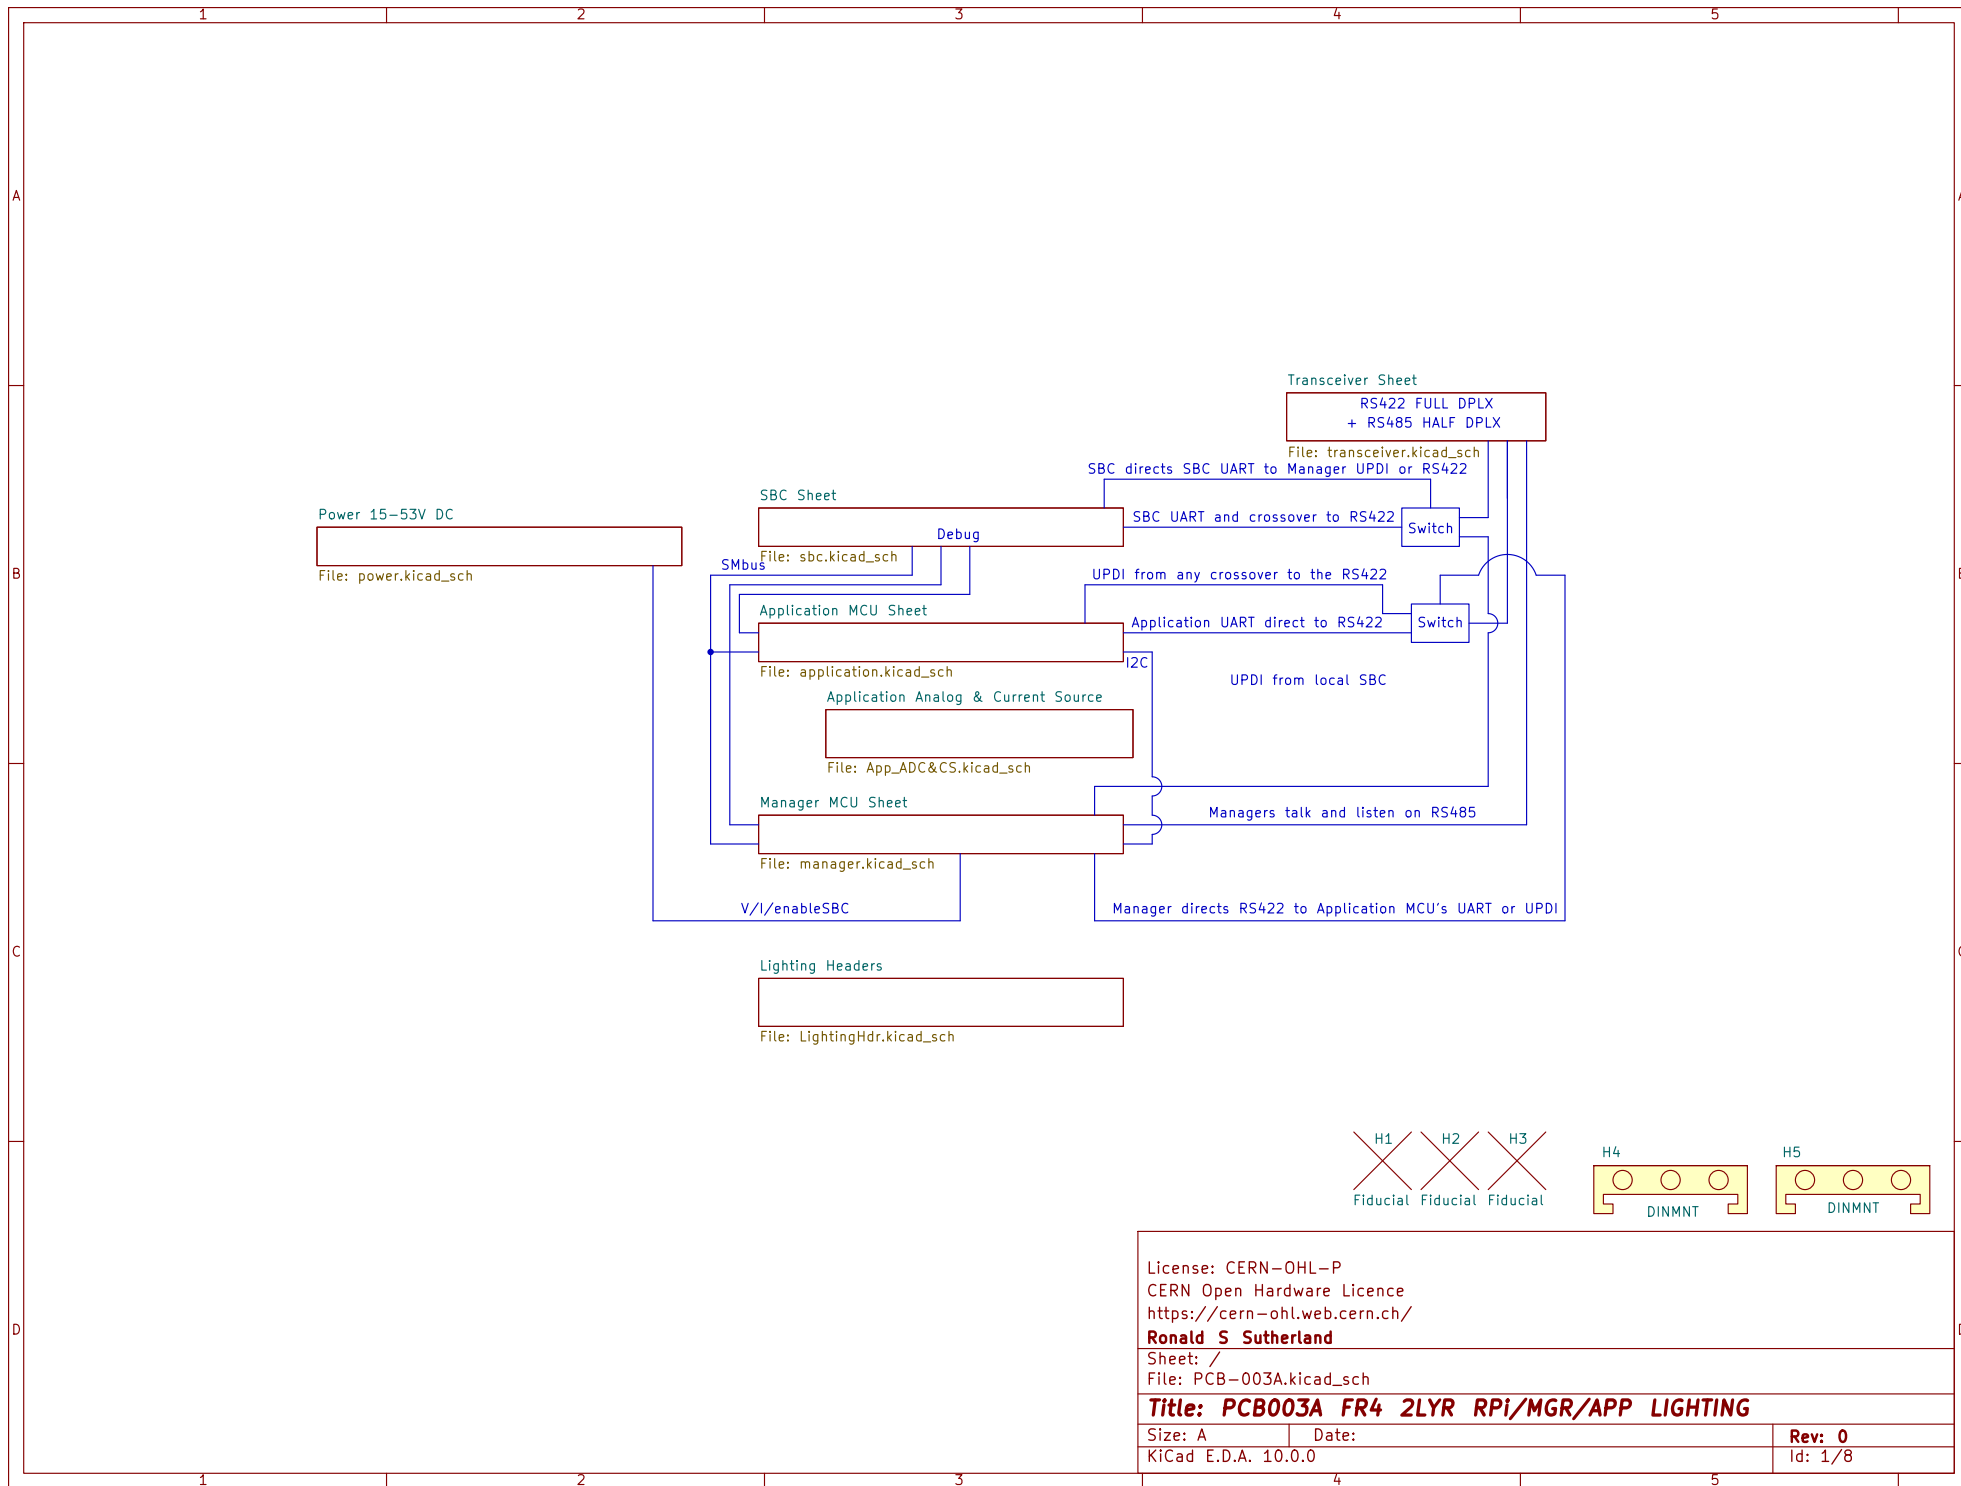

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>

**Ronald S Sutherland**

Sheet: /  
File: PCB-003A.kicad\_sch



**Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING**

Size: A  
KiCad E.D.A. 10.0.0

Date:

Rev: 0  
Id: 1/8

Physical Button Shutdown and Poweroff Overlay  
After shutdown use BCM18 to tell Manager MCU to kill power  
sudo nano /boot/config.txt  
dtoverlay=gpio-poweroff,gpiopin=18,active\_low=1  
dtoverlay=gpio-shutdown,gpio\_pin=6,debounce=3000

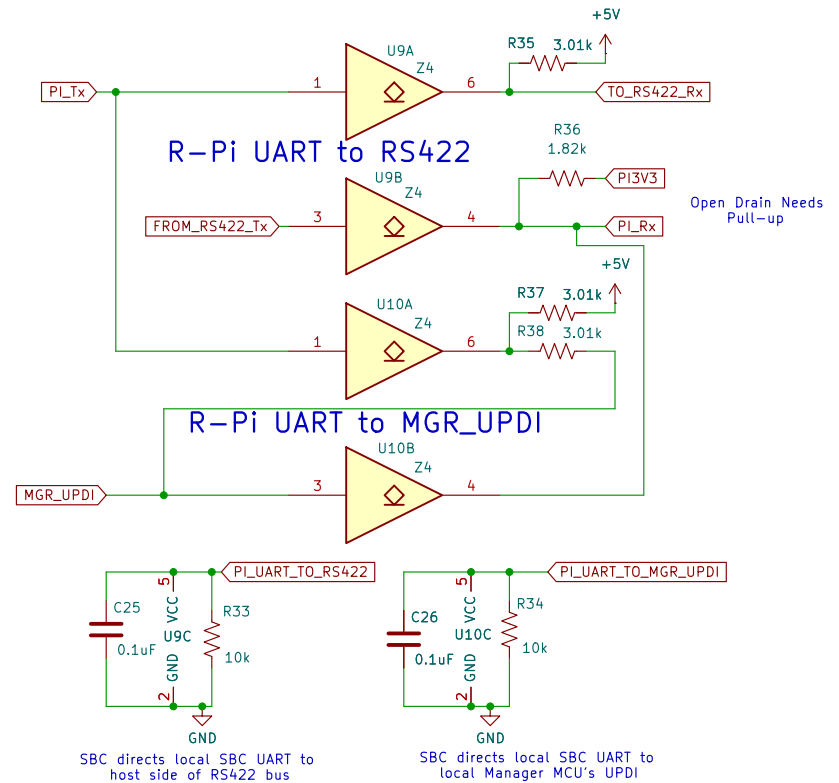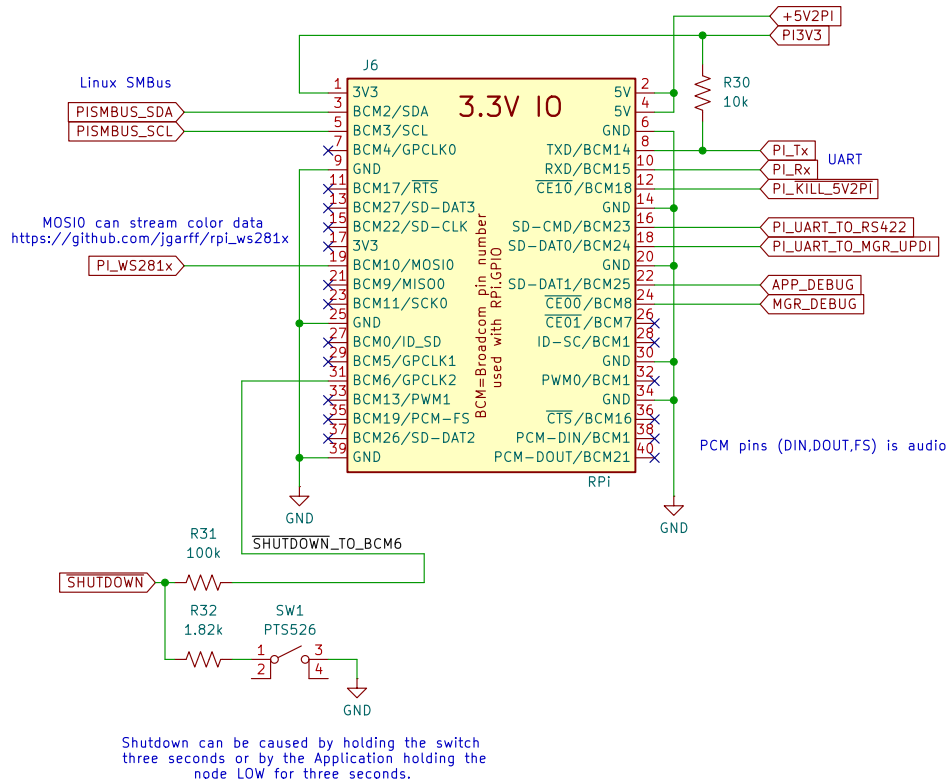

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>

Ronald S Sutherland

Sheet: /SBC Sheet/  
File: sbc.kicad\_sch


Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING

Size: A  
KiCad E.D.A. 10.0.0



Date:

Rev:  
Id: 2/8


## Manager MCU

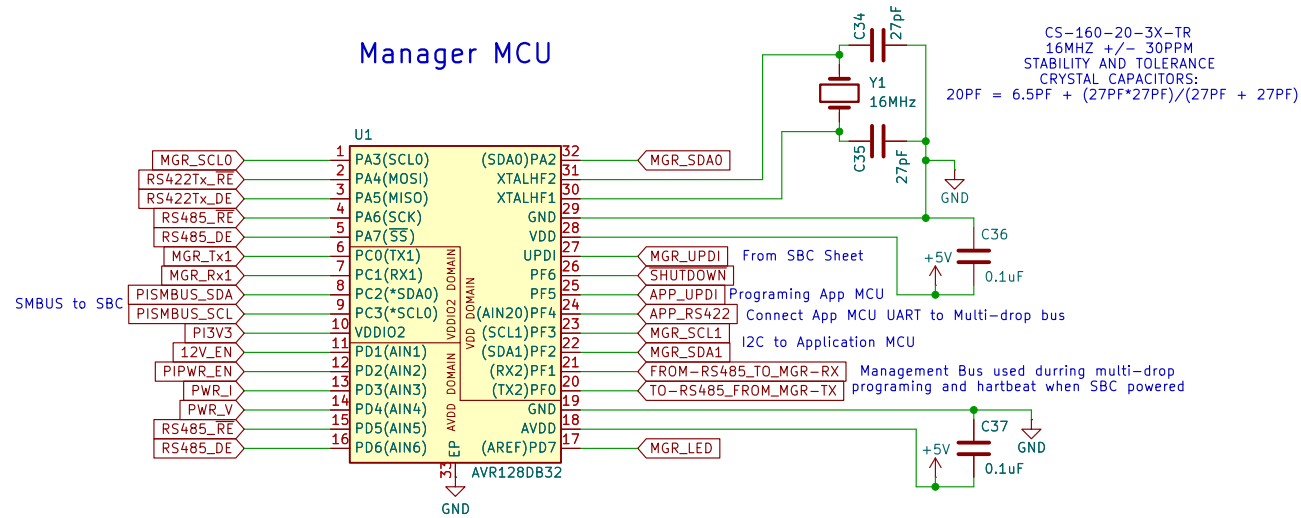

## Manager I2C Application I2C

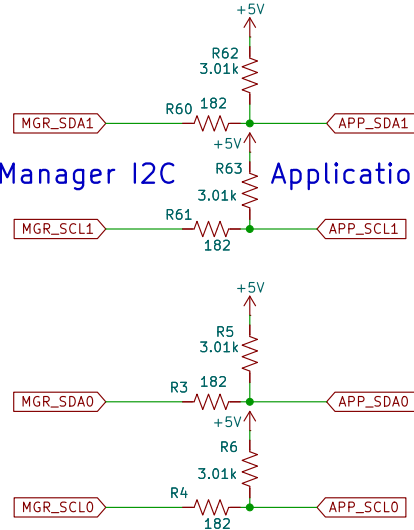

## Application Debug UART to SBC

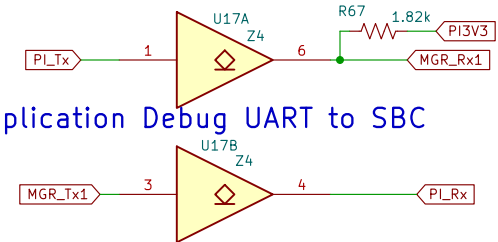

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>


**Ronald S Sutherland**


Sheet: /Manager MCU Sheet/  
File: manager.kicad\_sch






**Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING**

Size: A Date:  
KiCad E.D.A. 10.0.0

Rev:  
Id: 3/8

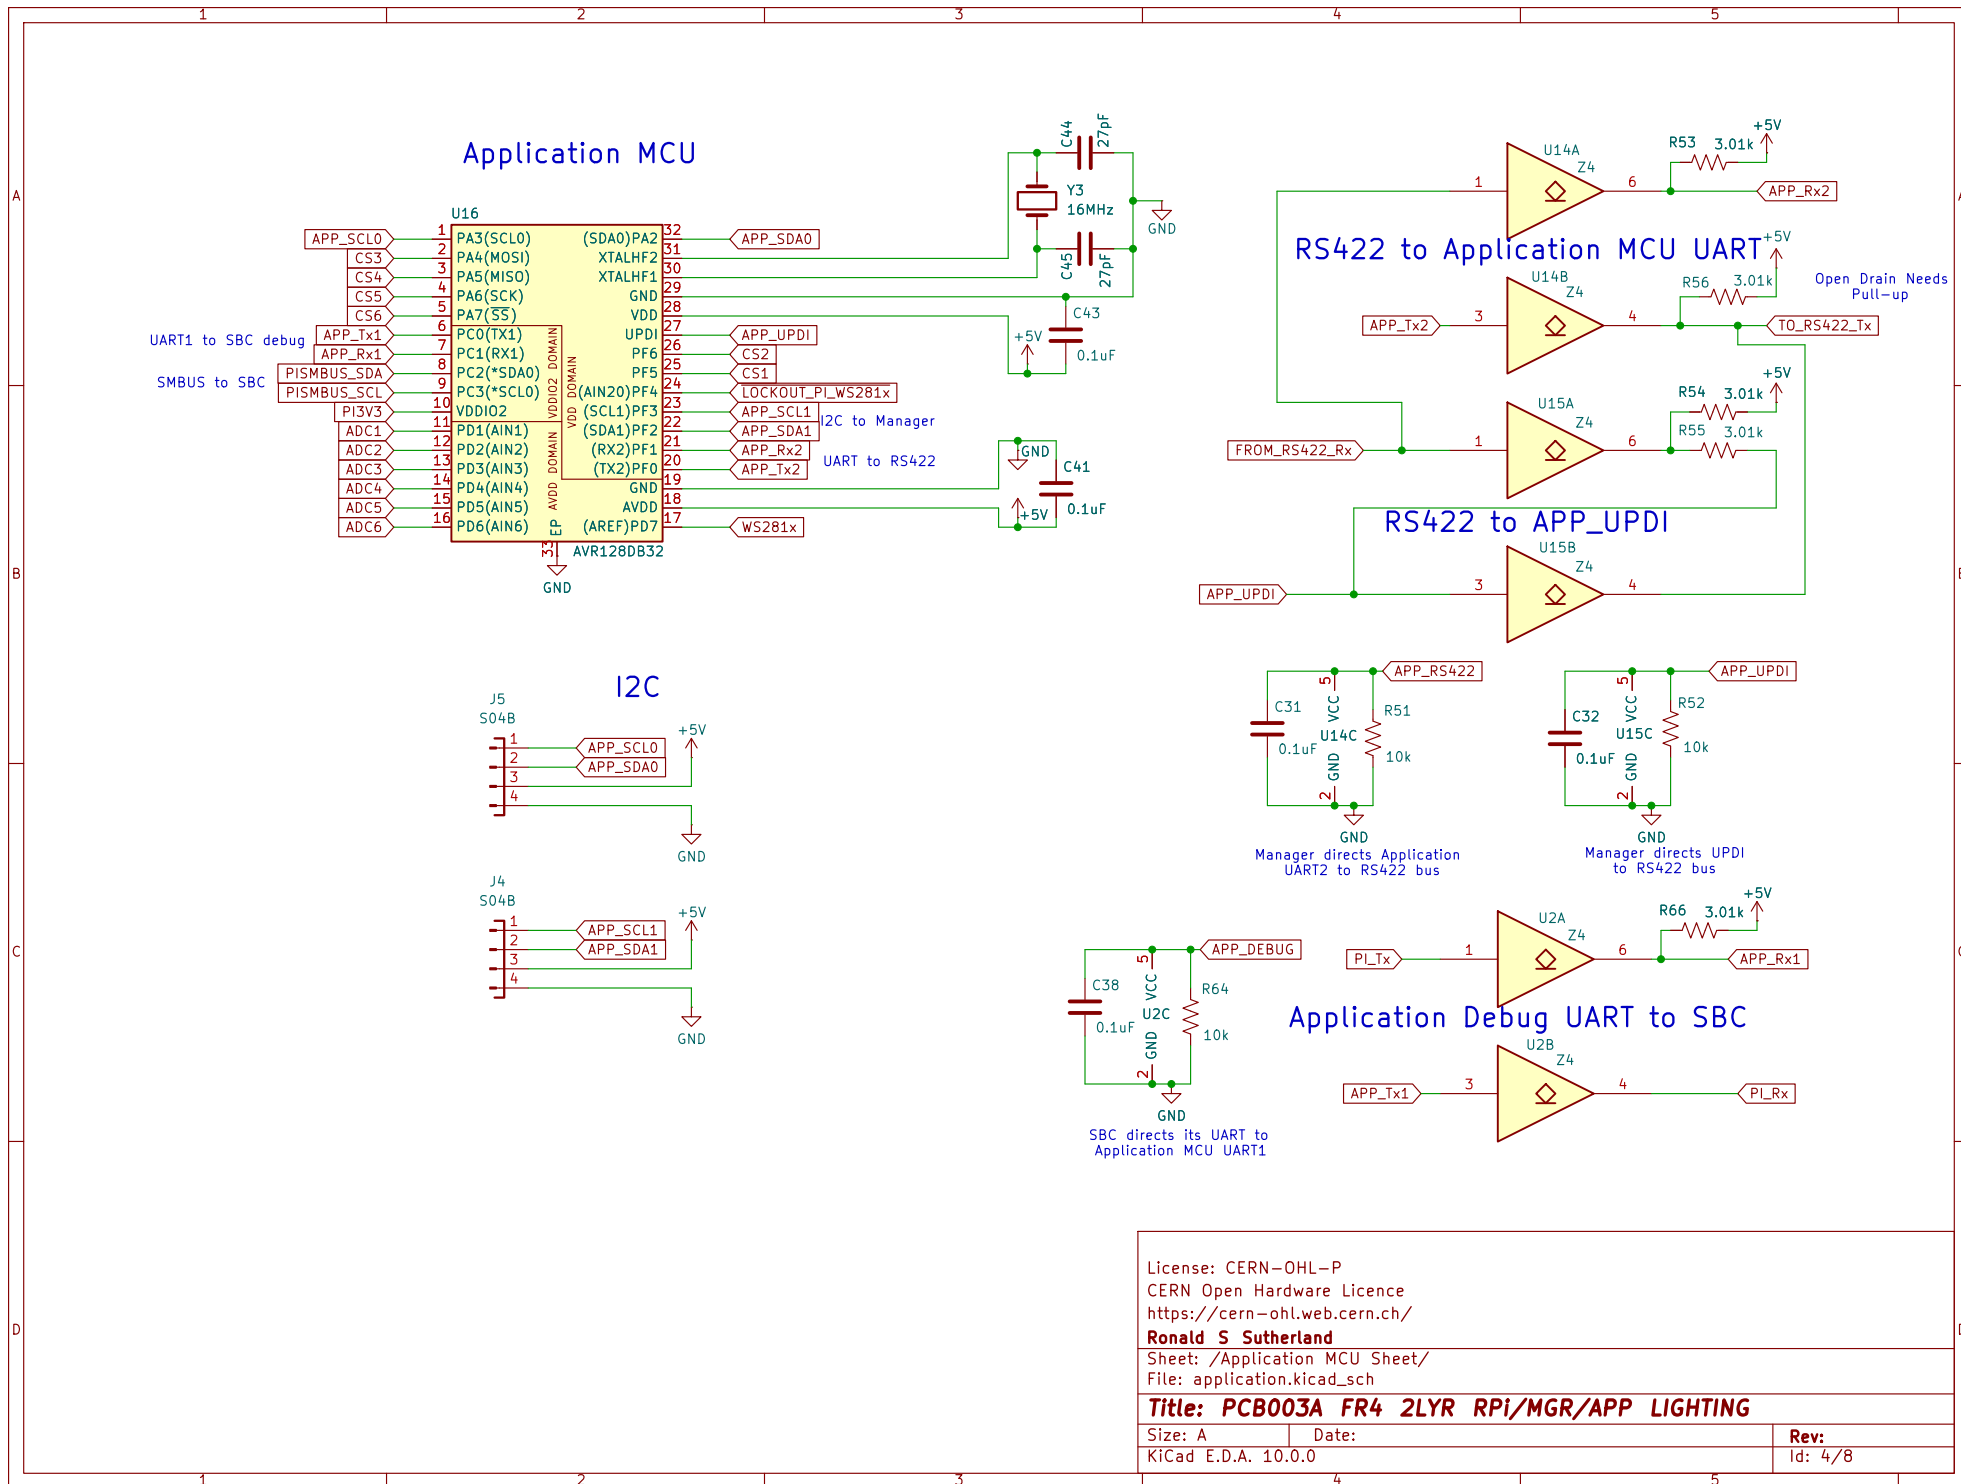

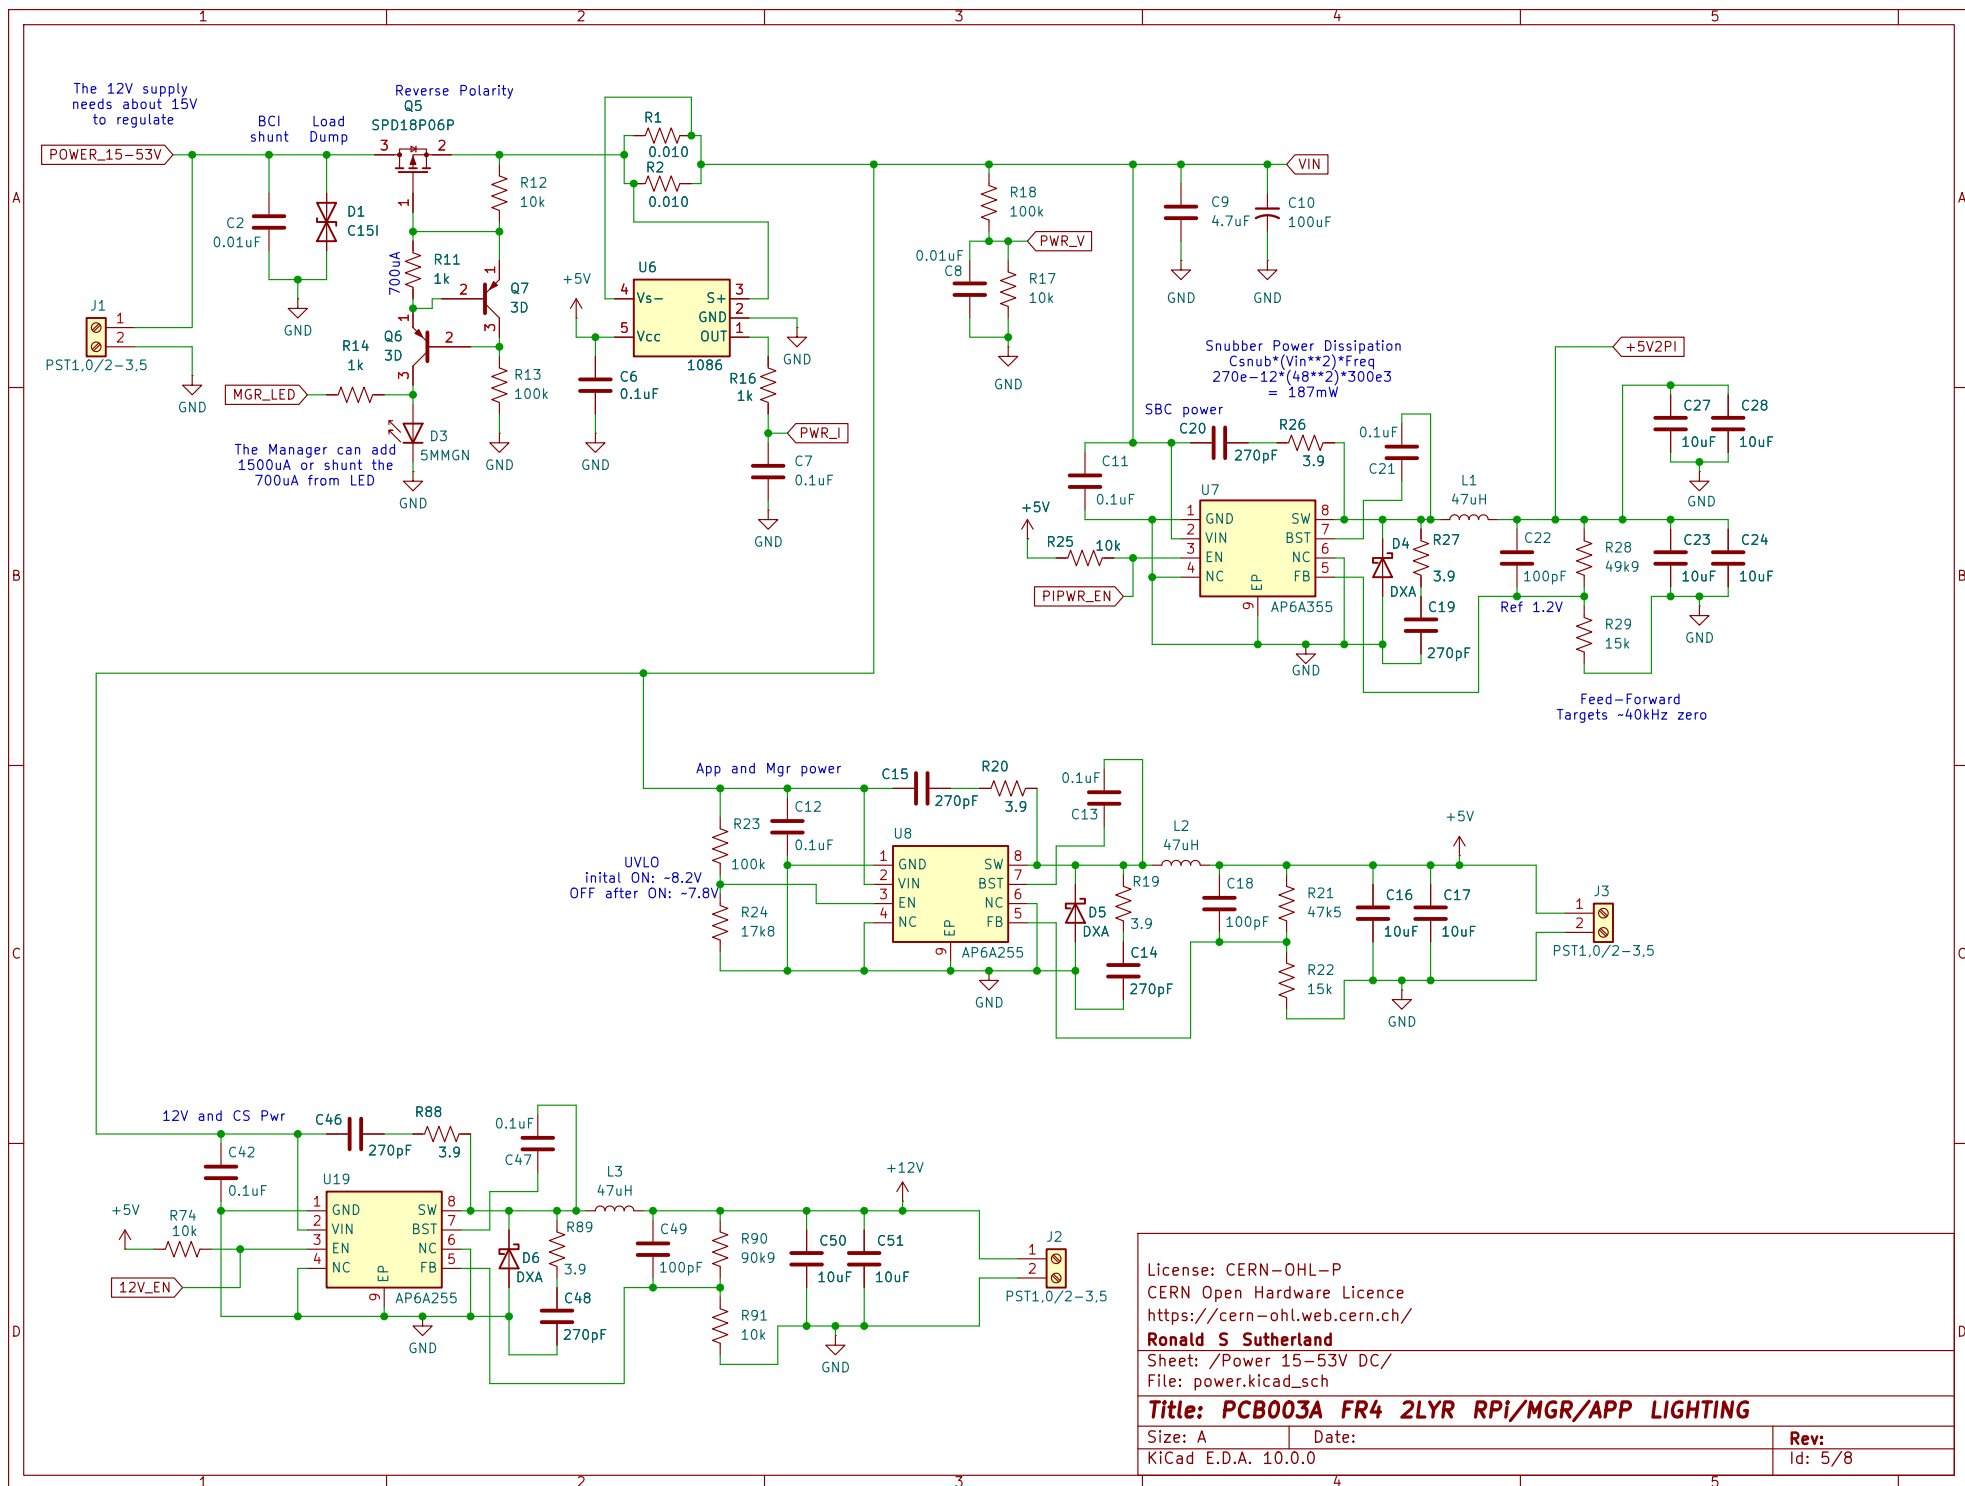

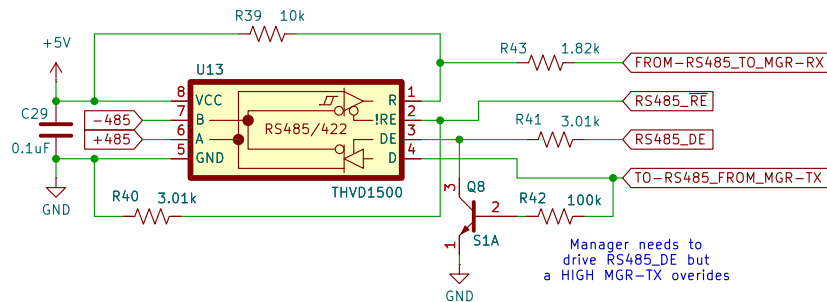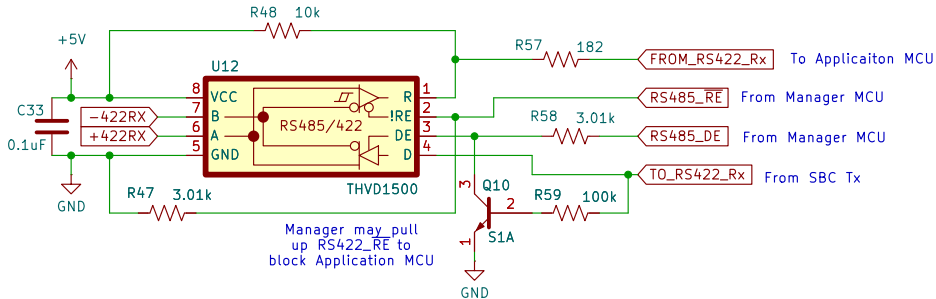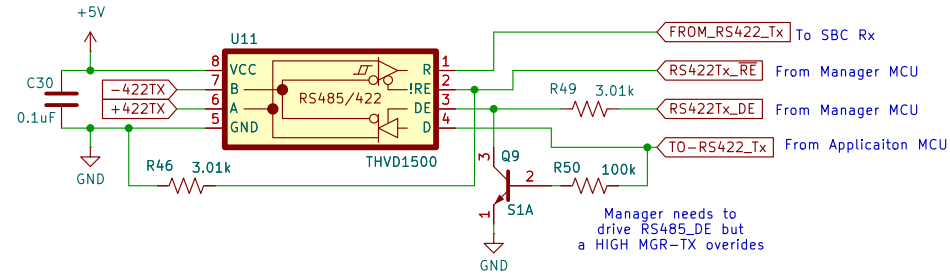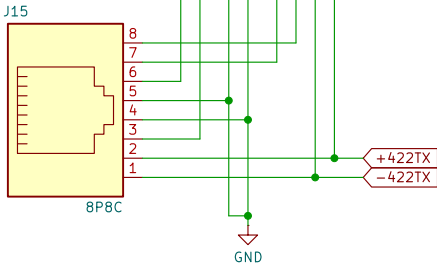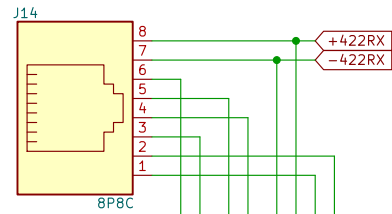

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>

**Ronald S Sutherland**



Sheet: /Transceiver Sheet/  
File: transceiver.kicad\_sch

**Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING**

Size: A4  
KiCad E.D.A. 10.0.0

Date:

Rev:  
Id: 6/8

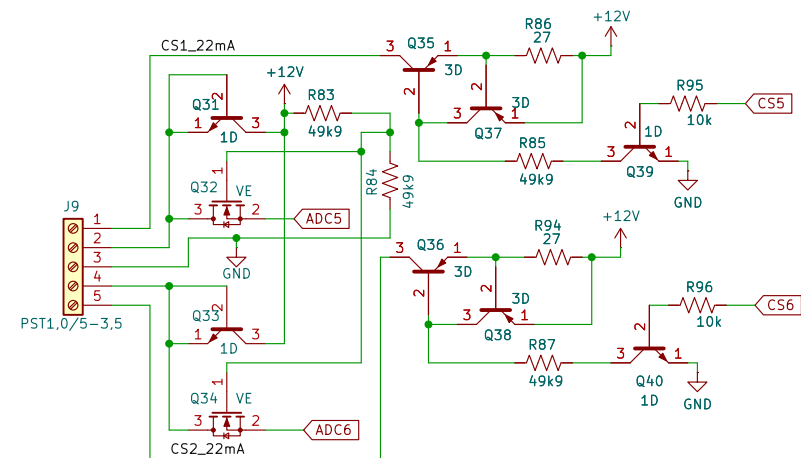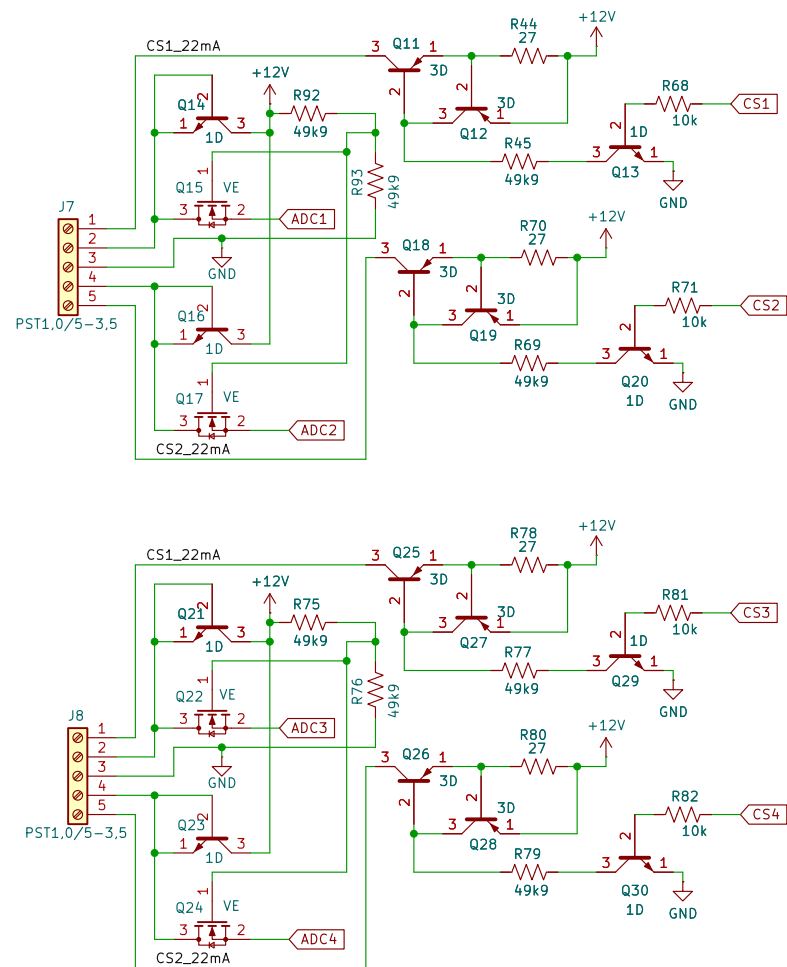

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>

**Ronald S Sutherland**


Sheet: /Application Analog & Current Source/  
File: App\_ADC&CS.kicad\_sch

**Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING**




Size: A4  
KiCad E.D.A. 10.0.0

Date:

Rev:  
Id: 7/8

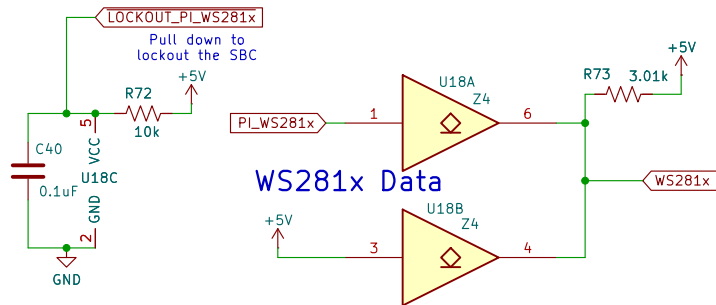


## WS281x Data

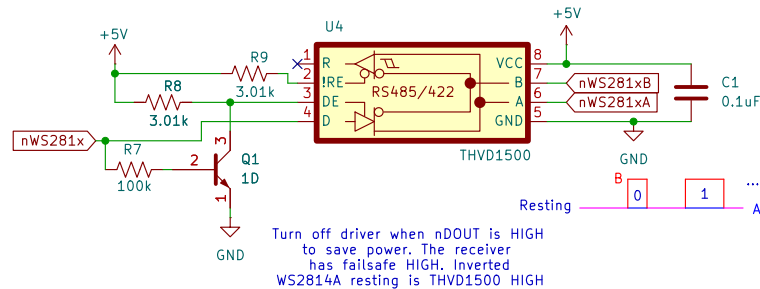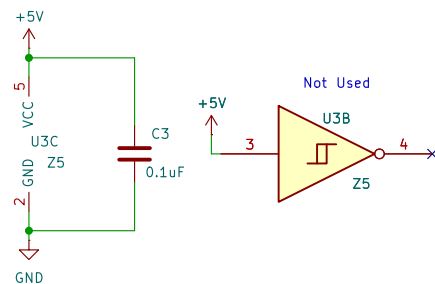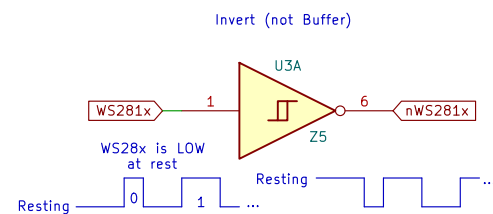

Turn off driver when nDOUT is HIGH to save power. The receiver has failsafe HIGH. Inverted WS2814A resting is THVD1500 HIGH

CAT5/CAT6 is by far the lowest cost, highest quality cabling option. Extend with "RJ45 Inline Couplers" with "POE++ rated"

<https://www.truecable.com/products/cat6-waterproof-couplers-shielded>

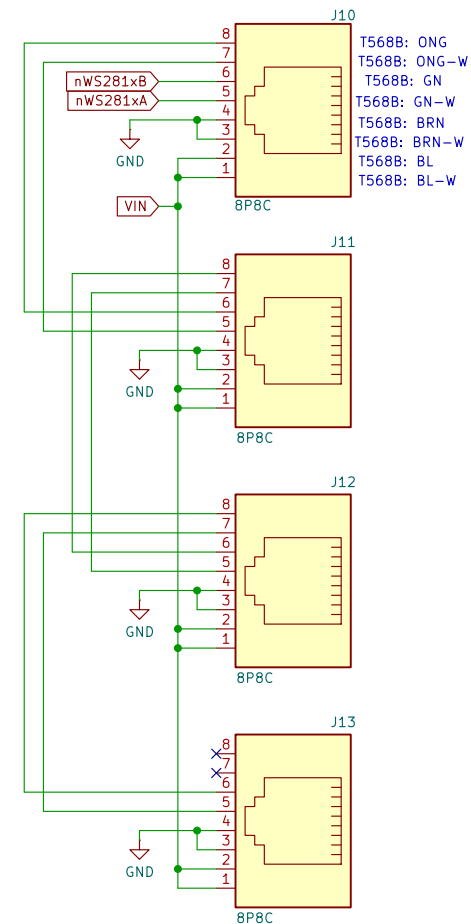

License: CERN-OHL-P  
CERN Open Hardware Licence  
<https://cern-ohl.web.cern.ch/>

**Ronald S Sutherland**

Sheet: /Lighting Headers/  
File: LightingHdr.kicad\_sch

**Title: PCB003A FR4 2LYR RPI/MGR/APP LIGHTING**

Size: A4  
KiCad E.D.A. 10.0.0

Date:

Rev:  
Id: 8/8