



Customer Support Division



Technical Service Bulletin

TSB_20251119 Rev.1217

Date: 17th December, 2025

Subject: Torque Specifications for QT/EPEC Equipment - 600V ONLY

Below are the torque specifications for QT/EPEC equipment. Section A covers general hardware, Section B covers manufacturer-specific circuit breaker connection equipment and references manufacturer's documentation, excerpts of which are attached.

Section A: General hardware, excluding MCCB connections, grade 5 minimum.

- 1/4"-20 – 8 lbs-ft
- 5/16"-18 – 15 lbs-ft
- 3/8"-16 – 26 lbs-ft
- 1/2" -13 – 64 lbs-ft

Section B: MCCB connections.

Siemens MCCB Nut Keepers:

- See Page 2

Siemens MCCB Mechanical Lugs:





- See pages 3-4



Connection / Anschluss / Raccordement / Conexión / 连接



D

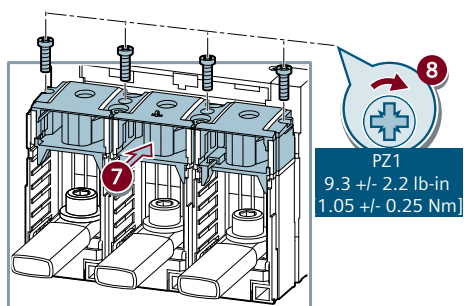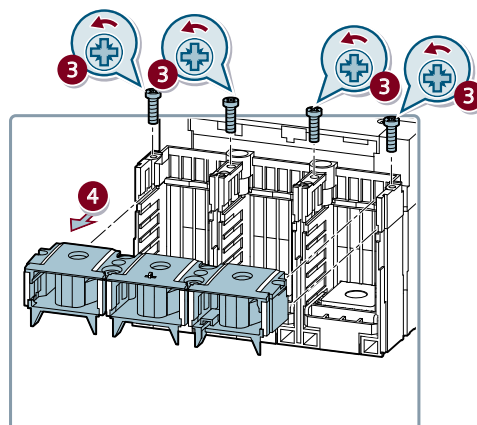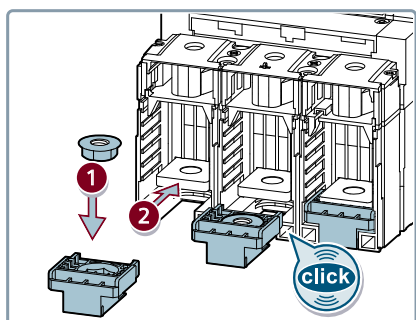

		W_{max} in [mm]	T in [mm]	L in [mm]	C_{min} in [mm]	$\varnothing$ in [mm]	H in [mm]		
3VA41		0.66 [17]	≤ 0.25 [≤ 6.5]	0.32 - 0.39 [8 - 10]	0.32 [8]	1/4 [6.5]	0.31 [8]	5/32"	70 [8]
3VA51		0.66 [17]	≤ 0.25 [≤ 6.5]	0.32 - 0.39 [8 - 10]	0.32 [8]	1/4 [6.5]	0.31 [8]	5/32"	70 [8]
3VA52		1 [25]	≤ 0.31 [≤ 8]	0.40 - 0.47 [10 - 12]	0.40 [10]	5/16 [8.5]	0.39 [10]	1/4"	177 [20]
3VA61 / 62		1.37 [35]	0.04 - 0.39 [1 - 10]	0.67 - 0.78 [17 - 20]	0.59 [15]	3/8 [11]	0.57 [14.5]	5/16"	354 [40]
3VA53 / 54 3VA63 / 64		1.37 [35]	0.04 - 0.39 [1 - 10]	0.67 - 0.78 [17 - 20]	0.59 [15]	3/8 [11]	0.57 [14.5]	5/16"	354 [40]
3VA914.-0K.00 150 / 250		1 [25]	≤ 0.31 [≤ 8]	0.40 [10]		5/16 [8.5]	0.39 [10]	1/4"	177 [20]

Connection / Anschluss / Raccordement / Conexión / 连接							
		 in [mm]	 UL [IEC]		 AWG/kcmil [mm²]	 in [mm]	 lb-in [N·m]
 TA1.0	3VA41 3VA51	5/32" [4]	Cu	 [Class 5/6]	[1.5 - 10]	0.5 [12.2]	14 AWG: 20 12 - 10 AWG: 35 8 AWG: 55 [1.5 - 2.5 mm²: 2.3] [4 - 6 mm²: 4] [10 mm²: 6.2]
				 [Class 5/6]	[1.5 - 10]		
				 Class B/C [Class 2]	14 - 8 [1.5 - 10]		
				 Class A [Class 1]	14 - 8 [1.5 - 10]		
			Al	 Class B	8		
				 Class A	12 - 10		
 TC1.0	3VA41 3VA51	5/32" [4]	Cu	 Class B/C	14 - 8	0.5	14 AWG: 20 12 - 10 AWG: 35 8 AWG: 55
				 Class A	14 - 10		
 TA1.1	3VA41 3VA51	5/32" [4]	Cu	 [Class 5/6]	[10 - 35]	0.5 [12.2]	 3VA913.-0JB1. *E01* 3VA913.-0JG1. *E01* 8 AWG: 55 3 AWG - 3/0: 100 [10 mm²: 6.2] [16 mm² - 95 mm²: 11.3]  3VA913.-0JB1. *E02>* 3VA913.-0JG1. *E02>* 8 AWG - 6 AWG: 55 4 AWG - 1/0: 70 2/0 - 3/0: 100 [10 mm² - 16 mm²: 6.2] [25 mm² - 50 mm²: 7.9] [70 mm² - 95 mm²: 11.3]
				 [Class 5/6]	[10 - 70]		
				 Class B/C [Class 2]	8 - 3/0 [10 - 95]		
				 [Class 1]	[10 - 16]		
			Al	 Class B [Class 2]	8 - 3/0 [10 - 95]		
				 [Class 1]	[10 - 16]		
 TC1.1	3VA41 3VA51	5/32" [4]	Cu	 Class B/C	14 - 2/0	0.5	14 AWG: 25 12 AWG: 35 10 AWG - 2/0: 55
				 Class A	14 - 10		
 TA1.3	3VA52 3VA61 3VA62	5/32" [4]	Cu	 [Class 5/6]	[1.5 - 35]	0.7 [18]	14 AWG - 8 AWG: 55 6 AWG - 2 AWG: 75 1 AWG - 1/0: 120 [1.5 - 10 mm²: 6.2] [16 - 35 mm²: 8.5] [50 mm²: 13.6]
				 [Class 5/6]	[1.5 - 35]		
				 Class B/C [Class 2]	14 - 1/0 [1.5 - 50]		
				 Class A [Class 1]	14 - 10 [1.5 - 16]		
			Al	 Class B	8 - 1/0		
 TC1.3	3VA52 3VA61 3VA62	5/32" [4]	Cu	 Class B/C	14 - 1/0	0.5	14 AWG - 8 AWG: 55 6 AWG - 2 AWG: 75 1 AWG - 1/0: 120



Connection / Anschluss / Raccordement / Conexión / 连接



		 In [mm]		 UL [IEC]	 AWG/kcmil [mm²]	 in [mm]	 lb-in [N·m]
 TA1.4	3VA52 3VA61 3VA62	5/16" [8]	Cu	 [Class 5/6]	[25 - 150]	0.8 [20]	6 AWG - 2 AWG: 140 1 AWG - 350 kcmil: 275 [16 - 35 mm²: 15.8] [50 - 185 mm²: 31.1]
				 [Class 5/6]	[16 - 120]		
				 Class B/C [Class 2]	6 - 350 [16 - 185]		
				 [Class 1]	[16]		
			Al **	 Class B [Class 2]	6 - 350 [16 - 185]		
				 [Class 1]	[16]		
 TC1.4	3VA52 3VA61 3VA62	5/16" [8]	Cu	 Class B/C	6 - 350	0.8	6 AWG - 2 AWG: 140
 TA1.5	3VA53 3VA54	5/16" [8]	Cu	 [Class 5/6]	[50 - 240]	1.1 [28]	375 [42.4]
	3VA63 3VA64			 [Class 5/6]	[50 - 240]		
	Cu wire 380A Al wire 310A			 Class B/C [Class 2]	1 - 600 [50 - 300]		
			Al	 Class B [Class 2]	1 - 600 [50 - 300]		
 TC1.5	3VA53 3VA54 3VA63 3VA64	5/16" [8]	Cu	 Class B/C	2 - 600	1.1	500

**)	EN	When connecting Al-cable: use antioxidant.	DE	Bei Anschluss von Al-Kabel: Antioxidationsmittel verwenden.
	FR	En cas de raccordement d'Al-câble: utiliser un antioxydant.	ES	Cuando conecte el cable de aluminio: utilice antioxidante.
	IT	Quando si collega il cavo Al: usare un antiossidante.	PT	Ao ligar o cabo Al: Usar antioxidante.
	TR	Aluminyum kabloyu bağladiğında, antioksidan (pas önleyici) kulan.	PY	При подключении Al-кабеля: используйте антиоксидант.
	PL	Przy podłączaniu kabla Al: należy użyć środka przeciwutleniającego.	中	连接铝制电缆时：使用抗氧化剂