

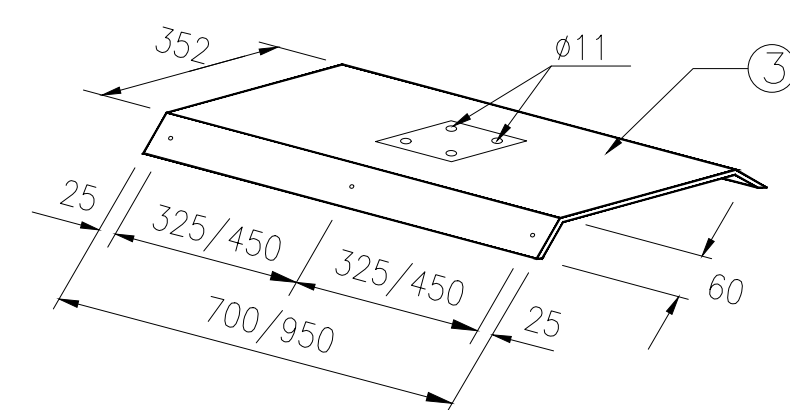


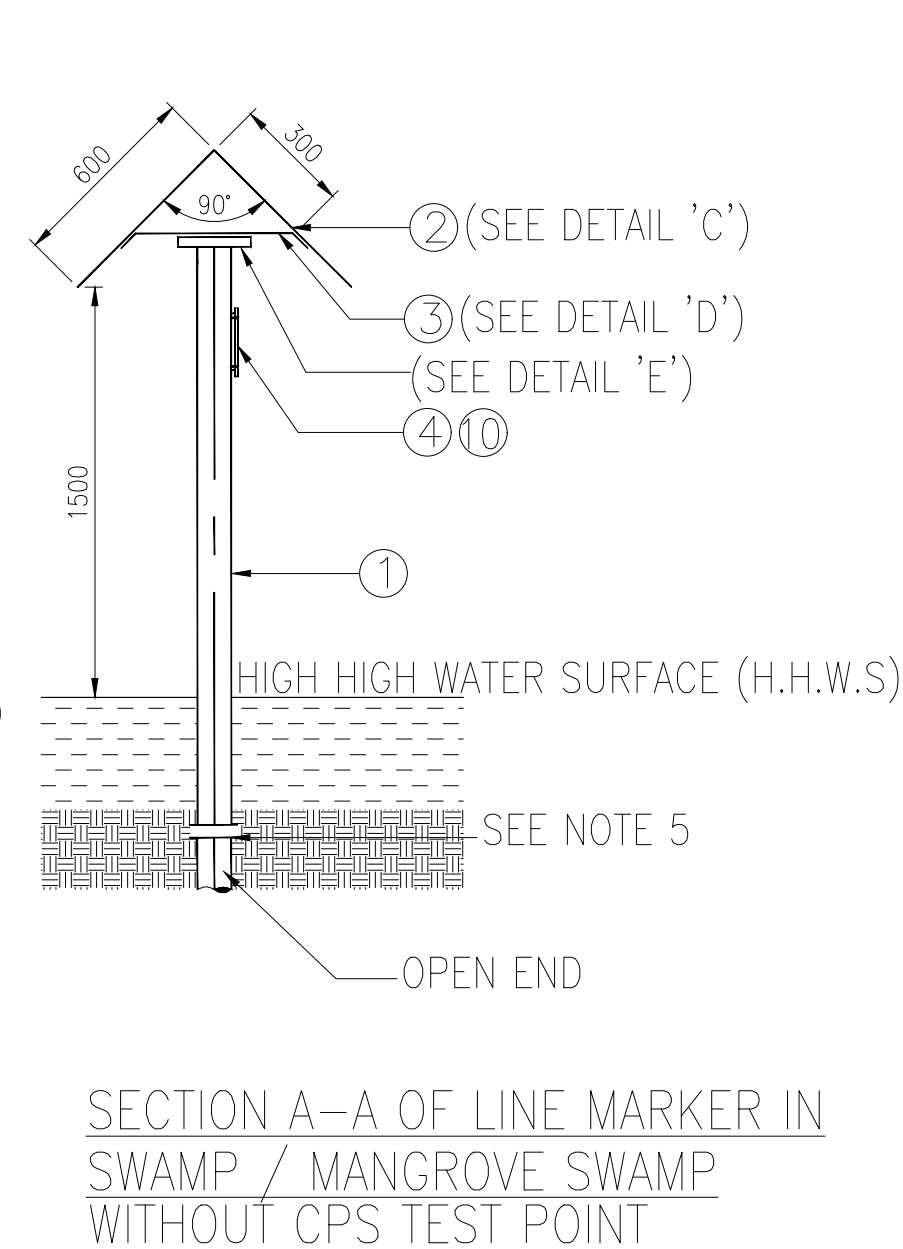

DETAIL 'D'

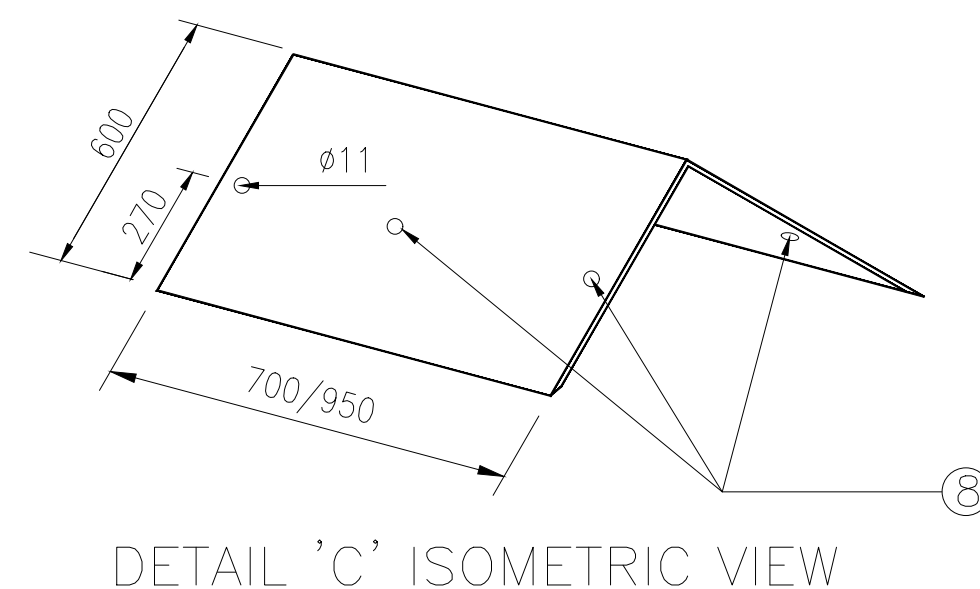

DETAIL 'C' ISOMETRIC VIEW

SN	SIZE / MATERIAL DESCRIPTION
1	4" C.S. PIPE 4.0 mm THICK
2	3 mm THICK STEEL PLATE (700 / 950 mm x 600 mm)
3	3 mm THICK STEEL PLATE (700 / 950 mm x 352 mm) + 2 (700 / 950 mm x 60 mm)
4	3 mm THICK STEEL PLATE 400 mm x 200 mm
5	5 mm THICK STEEL PLATE 150 mm x 150 mm
6	5 mm THICK STEEL PLATE 200 mm x 200 mm
7	9.5 x 25 mm SELF TAPPING SCREW STAINLESS WITH STEEL PLATED WASHER
8	STAINLESS STEEL STUD BOLTS & NUTS $\varnothing$ 10 x 15 mm + $\varnothing$ 10 WASHERS
9	STAINLESS STEEL STUD BOLTS & NUTS $\varnothing$ 10 x 20 mm + $\varnothing$ 10 WASHERS
10	3 mm THICK STEEL PLATE 500 mm x 365 mm

1. ALL DIMENSIONS ARE IN MILLIMETER UNLESS STATED OTHERWISE.
2. PIPELINE MARKER SIGN SHALL BE INSTALLED IN DRY AREAS, MANGROVE SWAMP, SWAMP AREAS WITH PERMANENT WATER LEVEL AND AT SEASONAL SWAMP AREAS WHERE THE MAXIMUM EXPECTED WATER LEVEL WILL BE HIGHER THAN 500mm FROM NATURAL GRADE LEVEL
3. PIPELINE MARKER SHALL BE INSTALLED AT EVERY INTERSECTION.
4. PIPELINE MARKER SHALL BE INSTALLED AT EVERY MAJOR FACILITY/FOREIGN PIPELINE CROSSING
5. PIPELINE MARKER SHALL BE PAINTED AS FOLLOWS:
 - A. ABOVE WATER IN ACCORDANCE WITH OWNER SPECIFICATION PAINT SHALL BE OF REFLECTIVE TYPE.
 - B. COATING FOR BELOW WATER LEVEL SHALL BE POLYURETHANE-TAR COATING.
6. THE PIPELINE MARKER SHALL BE FIRMLY DRIVEN INTO GROUND IN SWAMPY AREAS SO AS TO ASSURE ITS STABILITY, IF REQUIRED THE JOINT SHALL BE WELDED OR FLANGED.
7. THE HEIGHT OF THE PIPELINE MARKER MAY BE CHANGED IN RELEVANT LOCATIONS TO ENABLE BETTER VISIBILITY (ONLY WHEN APPROVED BY OWNER / COMPANY).
8. COLOUR: STRUCTURE (YELLOW), NUMBER AND LETTER (RED), CONTRACTOR SHALL PROVIDE SAMPLE TEXT FOR OWNER APPROVAL PRIOR TO MANUFACTURE.
9. BASE CONCRETE: COARSE AND FINE AGGREGATES BS 882 OR ASTM C33, AGGREGATES MAXIMUM SIZE: 20 MM*.
MINIMUM CEMENT CONTENT: 350 KG/M
WATER/CEMENT RATIO: 0.5,
COARSE/FINE AGGREGATES RATIO: 2.

HOLD 1 – OWNER / COMPANY TO PROVIDE EMERGENCY NUMBER.

[illegible]