CV TECHNOLOGY
FIRE AND EXPLOSION PROTECTION

Product Data Sheet

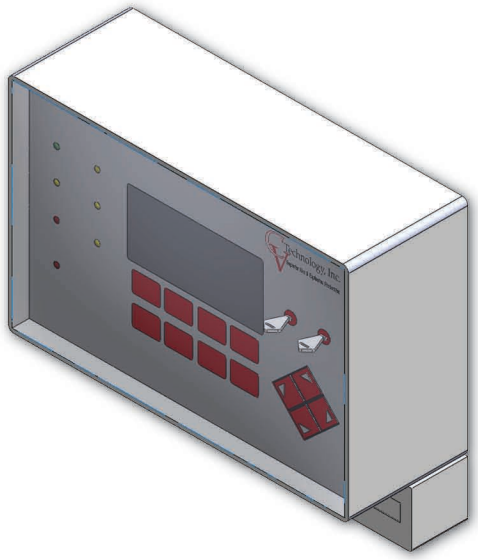

CONEX 2-Zone Controller

INTERCEPTOR-HRD™
High Rate Discharge Explosion Suppression System

The CONEX controller is designed to be used in conjunction with the Interceptor-HRD chemical suppression and isolation systems. The controller features the ability to operate up to two independent operating zones at a time. A user interface is provided by a LCD screen, push button navigation, and signaling lights on the front of the controller enclosure. The interface includes a searchable data log and electrical lockout key switches for each zone. Six programmable dry contact relays are provided by the controller to signal for actuation, faults, or other operational states.

Chemical suppression and isolation systems are designed for use in almost any process handling combustible dust. The Interceptor-HRD system can be used for pneumatic conveying systems, dust collection systems, cyclones, mills, dryers, conveyors, and storage vessels.

SPECIFICATIONS

Power Requirement
100 – 240 VAC, 50-60 Hz

Amp Draw
Up to 2.5A

Output Power
24 VDC for Detectors and HRD Bottles

Inputs
Two independent zones

Output
Two independent zones

Environmental Temperature
14°F (-10°C) to 122°F (50°C)

Environmental Ingress
IP 65 as standard

Body Material
Grey Fiberglass

Display
LCD Display with Push Buttons

OSHA Lockout
Lockout key switches

Output Signaling
6 programmable relays 30 VDC/3.15 A

Battery Backup
24 hour backup

Dimensions
23.6" x 24.5" x 9.8" (59.9 x 62.2 x 24.9 cm)

Weight
30 lb. (13.6 kg)

Certifications
ATEX – third party independent tested to EN 15089 and EN 14373

Compliance
NFPA 69, FM 7-76

CV Technology, Inc.
15852 Mercantile Court • Jupiter • Florida 33478
561.694.9588 www.cvtechnology.com Fax: 561.694.9585