CV TECHNOLOGY
FIRE AND EXPLOSION PROTECTION

Product Data Sheet

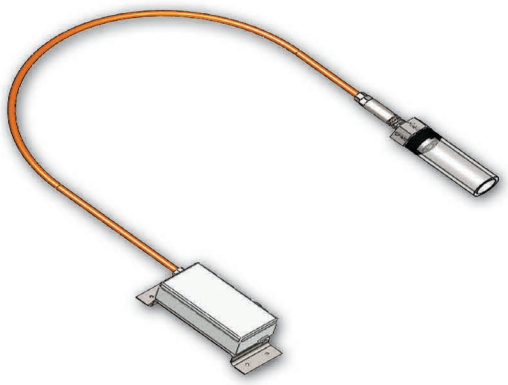

DetEx Pressure Detector

INTERCEPTOR-HRD™
High Rate Discharge Explosion Suppression System

The DetEx pressure detector uses a ceramic material embedded in a fluid at the end of each detection probe to measure the pressure within the process being protected. The detector has state-of-the-art programming for both dynamic detection and static detection. The detector programming includes a "floating zero" feature. The floating zero is designed to differentiate and adjust the activation point based on process fluctuations. This allows for minor pressure spikes within the protected process to have no effect on the pressures required by our system for activation. Each detector includes a process adaptor for easy installation. All DetEx detectors feature data recording and can generate plots that provide second to second recording of the pressure inside the protected volume. The DetEx pressure detector combined with the floating zero technology provides unsurpassed reliability and reaction for chemical suppression systems.

Chemical suppression and isolation systems are designed for use in almost any process handling combustible dust. The Interceptor-HRD system can be used for pneumatic conveying systems, dust collection systems, cyclones, mills, dryers, conveyors, and storage vessels.

SPECIFICATIONS

Power Requirement
24 VDC, supplied by CONEX controller

Pressure Range
-11.6 to 17.4 psi (-80 to 120 kPa)

Cable Length
6.5 feet (2 m)

Detector Type
Rate of rise over time (dp/dt)

Number of Detector Probes
One

Process Temperature
-4°F (-20°C) to 302 °F (150°C)

Environmental Temperature
-4°F (-20°C) to 185 °F (85°C)

Environmental Ingress
IP 65

Body Material
Stainless Steel/Aluminum

Connection
SST welding ring included

Dimensions of Detector
6.17″ x 1.58″ Ø (15.7 x 4.0 Ø cm)

Dimensions of Process Adaptor
5.9″ x 2.04″ Ø (14.9 x 5.2 Ø cm)

Dimensions of Analyzing Unit
6.88″ x 2.29″ x 3.15″ (17.5 x 5.8 x 8.0 cm)

Certifications
ATEX – third party independent tested to EN 15089 and EN 14373

Compliance
NFPA 69, FM 7-76

CV Technology, Inc.
15852 Mercantile Court • Jupiter • Florida 33478
561.694.9588 www.cvtechnology.com Fax: 561.694.9585