KWIK-KLEAN®
ROTARY AIRLOCK VALVES

SANITARY SOLUTIONS

KK

The Kwik-Klean® rotary airlock valve is designed for quick and simple disassembly and reassembly, allowing for easy inspection, clean-up and maintenance without the use of tools or removal of the valve from service. The valves use hand-tightened fasteners to secure the head plate to the housing with the head plate and rotor conveniently removed, the entire housing interior is accessible. Reassembly takes just minutes and internal clearances are automatically re-established every time.

UNMATCHED COMPETITIVE ADVANTAGES:

- Available in four sizes from 6x6 through 12x12
- Round or square flange assures system compatibility
- Cast iron, 304 SS or 316 SS housings are standard providing maximum structural stability
- Direct drive splined coupling for ease of assembly
- Tool-Free hand fasteners for rotor removal and regular inspections

Meyer is your single source for complete system components dealing with food products, high temperatures and high pressure differentials. Let our engineers provide you with recommendations to meet your most demanding needs.

MEYER® Engineered Airlock Technologies
1700 Franklin Blvd. • Libertyville, IL 60048
P: (847) 918-0111 • F: (847) 918-8183
www.rotaryvalve.com • sales@wmwmeyer.com 267-D-003

MEYER® Engineered Airlock Technologies

KLEAN-IN-PLACE II®
Sanitary/Cleaning Solutions

SANITARY SOLUTIONS

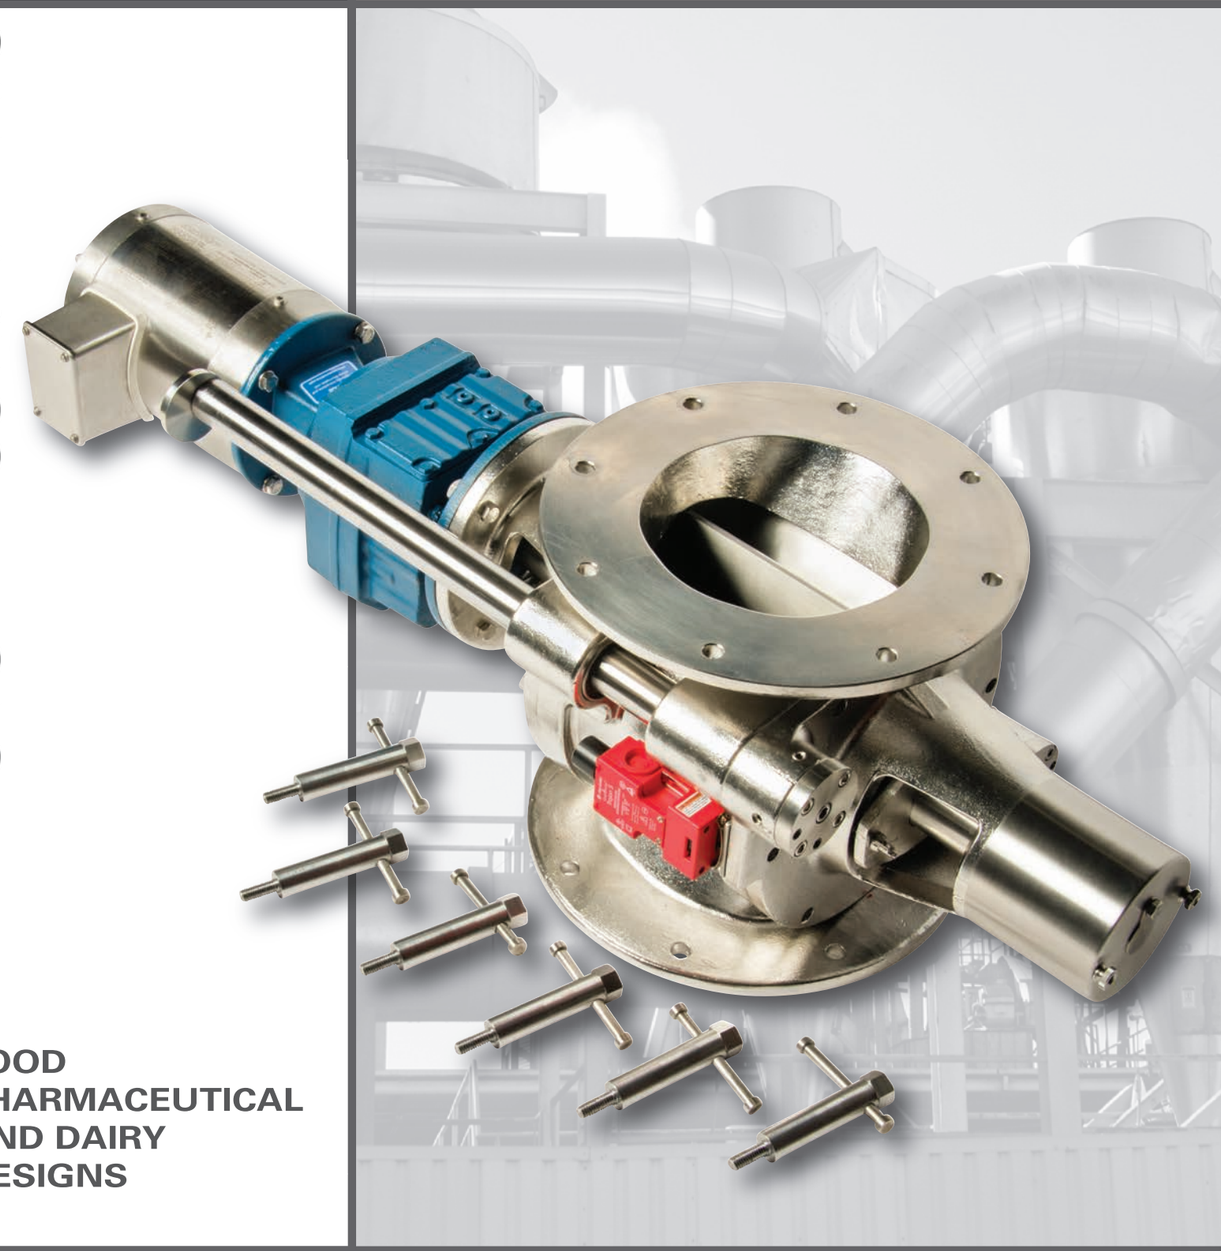

FOOD PHARMACEUTICAL AND DAIRY DESIGNS

1-800-963-4458

MEYER®
Engineered Airlock Technologies

KLEAN-IN-PLACE II®
ROTARY AIRLOCK VALVES

KIP II

The KLEAN-IN-PLACE II® rotary airlock valve is specially designed for applications where frequent cleaning, sanitizing or inspection of the bulk handling system is required and minimum downtime is critical.

The KLEAN-IN-PLACE II® has uniquely designed features making it compliant for FDA, USDA, 3A dairy and NFPA standards for materials used in food, dairy, chemical, and pharmaceutical applications. Our design incorporates a perfectly balanced 2-RAIL construction allowing the operator easy access to either clean the rotor, leaving it attached with the headplate or separating the rotor to completely remove for optimal cleaning.

UNMATCHED COMPETITIVE ADVANTAGES:

- Available in five sizes from 6x6 through 14x14
- Round flange assures system compatibility
- 316 SS housings are standard providing maximum structural stability
- Self Aligning Drive, without the use of special tools
- Available with packing and multiple seal designs
- Tool-Free hand fasteners for rotor removal and regular inspections
- Safety switch signaling when unit is ready to run
- Permanently sealed bearings ensure protection from contamination

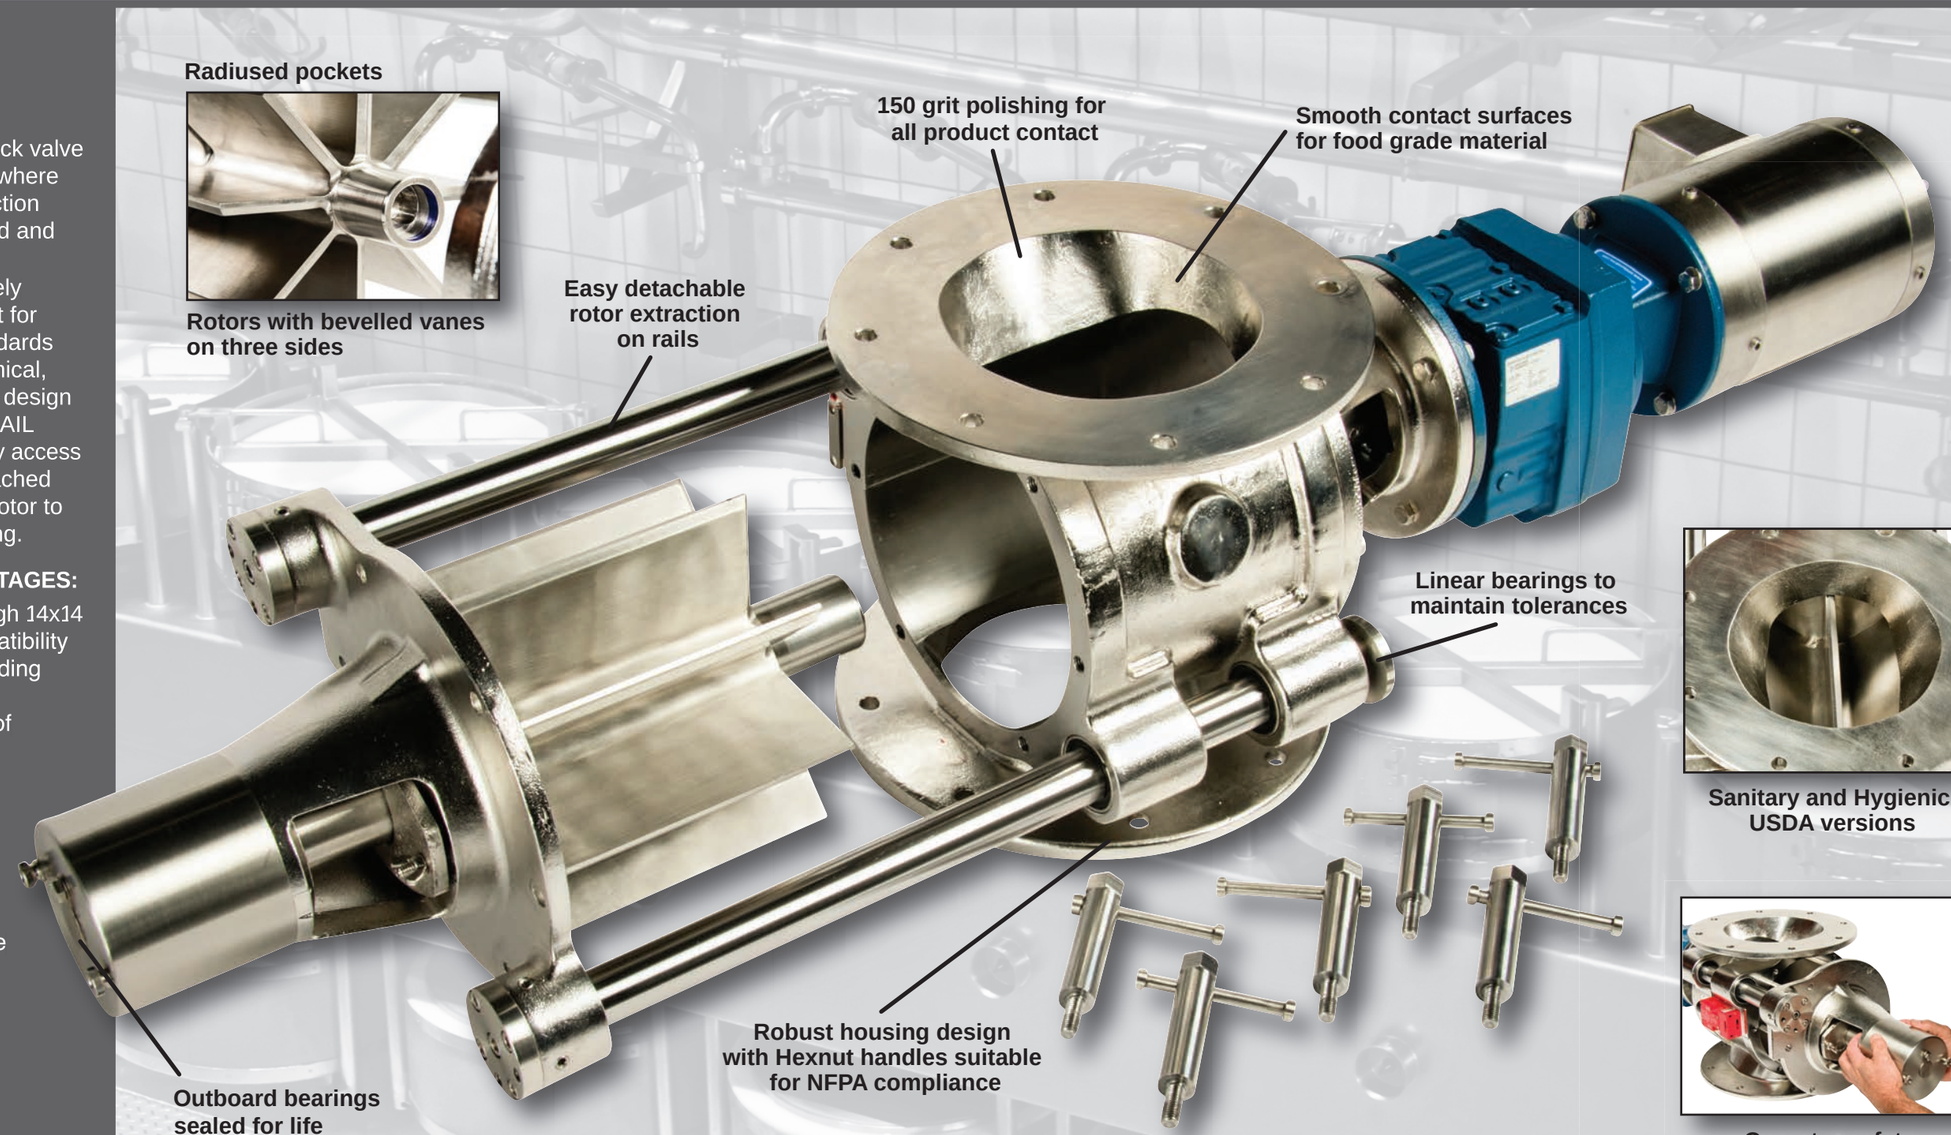

Sanitary and Hygienic USDA versions



Operator safety and flexibility during cleaning and maintenance

SANITARY SOLUTIONS

1-800-963-4458