
INSIDE STUDIO SP · VST3 · AU

QUIMERA

WAVETABLE · ORGANIC + METALLIC

Step-by-step manual

Version 0.5.0 · Windows and macOS · VST3 and AU

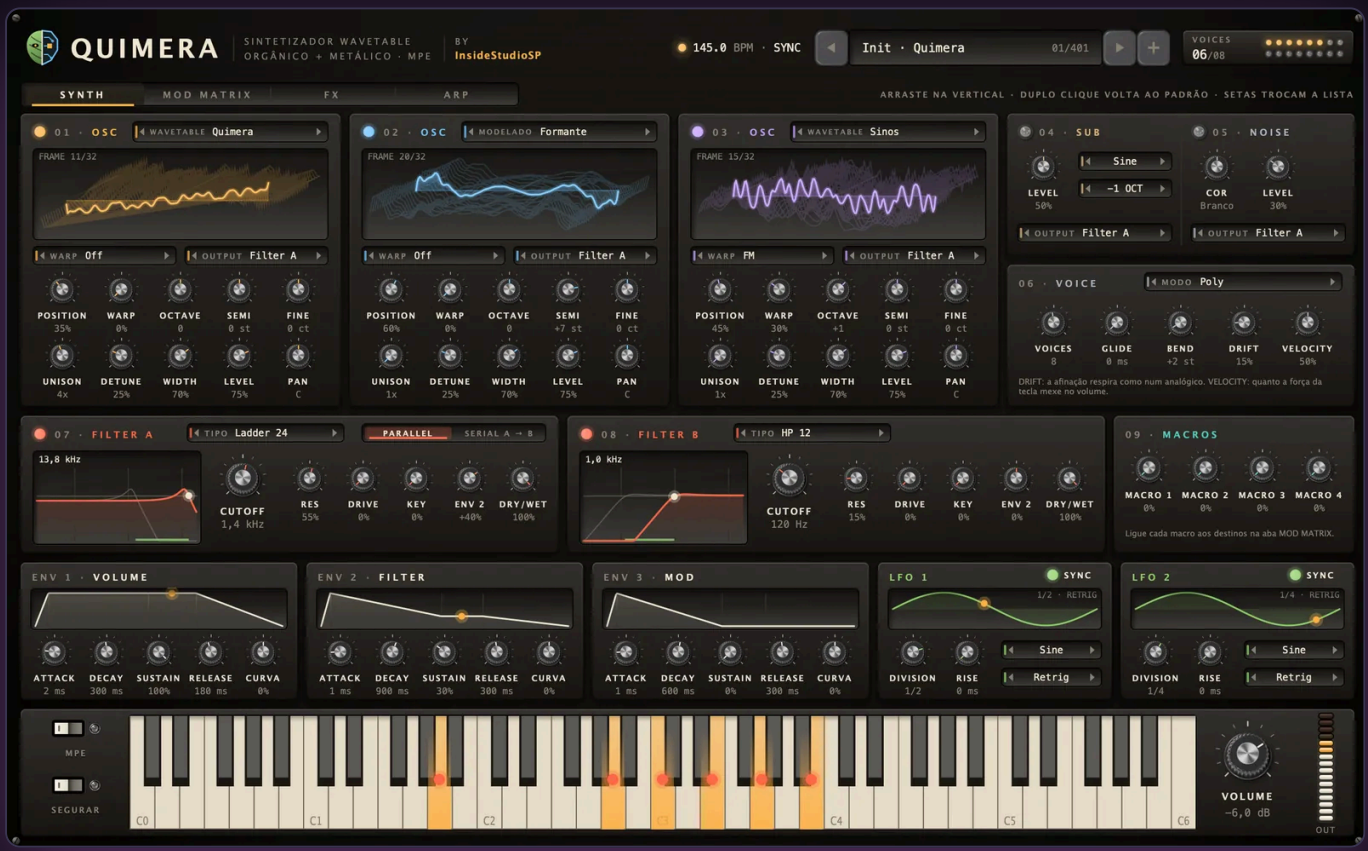

insidestudiosp.com.br/quimera · contato@insidestudiosp.com.br

What is QUIMERA

QUIMERA is a polyphonic synth that brings together the **metallic, digital** side of wavetables and the **organic** side of a classic analog synth: per-voice pitch drift, a self-oscillating ladder filter, glide and legato. All of its wavetables are generated in code, made just for it.

- **3 oscillators** with 24 wavetables, 11 warps and up to 8-voice unison; plus **SUB** and **NOISE**.
- **2 filters** (Ladder, LP/HP/BP, Notch, Comb, Formant) in series or parallel.
- **3 envelopes**, **2 LFOs**, **4 macros** and a 16-slot **MOD MATRIX**.
- An **effects rack** with 8 blocks and a 16-step **arpeggiator** with scales.
- **MPE**: per-note bend, pressure and slide.
- **401 presets** in 10 categories.

Before you start

ITEM	DETAILS
Format	VST3 instrument (Windows and macOS) and AU (macOS).
Voices	Up to 16 (default 8), in Poly, Mono and Legato modes.
Tabs	**SYNTH**, **MOD MATRIX**, **FX** and **ARP**, at the top of the window.
Window	From 75% to 200%, chosen in the preset menu.

Installation and activation


1. Download the installer from the link in your purchase e-mail and choose Windows or Mac.
2. Run the installer and open your DAW. If needed, have it scan for new plugins (rescan).
3. Load QUIMERA on an **instrument track** (MIDI).
4. The first time, enter the **e-mail** and the **license token** you received.

> **LICENSE.** The same token works on up to 2 computers. Deactivating it on one computer frees the slot for another. To view the license: click the preset name › `Licença…` (License…).

> **UNTIL ACTIVATED**, the instrument stays silent.

STEP 1

1 Pick a preset



Top bar: BPM and SYNC, preset name, ◀ ▶ to browse, + to save and the voices in use (VOICES).

- Click the **preset name** to open the menu: banks first, then categories.
- **FACTORY 1** has Init and 40 presets per category: *BASS, LEAD, PLUCK, PAD, ATMOS, PERC, DRUMS, KEYS, FX* and *ARP* (these with the arpeggiator already on).
- ◀ ▶ step through the list.

STEP 2

2 Oscillators (SYNTH tab)



OSC 1, 2 and 3: wavetable, drawn waveform (the current frame) and the knobs.

- Choose the **wavetable** in each OSC's selector (◀ ▶ arrows or click). There are 24, in three groups: **ANALÓGICO** (analog: Clássica, Pulso, Serra Dupla, Triângulo Dobrado = classic, pulse, double saw, folded triangle), **MODELADO** (modeled: Metal, Formante, Sincronizado, Dobra, Elétrico, Quadrada-Serra, Seno-Quadrada, Escova = metal, formant, synced, fold, electric, square-saw, sine-square, brush) and **WAVETABLE** (Cristal, Digital, Vocal, Harmônicos, Granito, Sinos, FM Linear, FM Metálico, Espectral, Órgão, Corda, Quimera = crystal, digital, vocal, harmonics, granite, bells, linear FM, metallic FM, spectral, organ, string, chimera).
- `POSITION` scans the 32 frames of the wavetable: it's what makes the timbre morph. Modulate it with an LFO or envelope to make the sound "move".

CONTROL	WHAT IT DOES
WARP + WARP knob	Bends the waveform: Off, Sync, Bend +, Bend −, PWM, Mirror, Fold, Quantize, FM and RM (these use the previous oscillator) and Asym. The WARP knob sets the amount.
OCTAVE / SEMI / FINE	Tuning in octaves, semitones and cents.
UNISON / **DETUNE** / **WIDTH**	Up to 8 copies per note, detuned against each other and spread across the stereo field.
LEVEL / **PAN**	Oscillator level and position.
OUTPUT	Where the oscillator goes: Filter A, Filter B, A + B or Direct (no filter).

SUB, NOISE and VOICE




BLOCK	WHAT IT DOES
SUB	A low waveform one or two octaves below (Sine, Triangle, Square), with LEVEL and OUTPUT.
NOISE	Noise with **COR** (color) and LEVEL, with OUTPUT.
VOICE · MODO (mode)	**Poly** (default), Mono or Legato.
VOICES	1 to 16 voices (default 8).
GLIDE / **BEND**	Glide between notes (default 0 ms) and pitch bend range, from 1 to 24 st (default +2 st).
DRIFT	Analog drift: the tuning "breathes" like on an analog synth (default 15%).
VELOCITY	How much key velocity affects the volume (default 50%).

TIP. For the organic side, use an ANALÓGICO wavetable, DRIFT above 15% and UNISON 2–4 with low DETUNE. For the metallic side, use Metal, Sinos or FM Metálico and modulate POSITION.

STEP 3

3 Filters, envelopes and LFOs

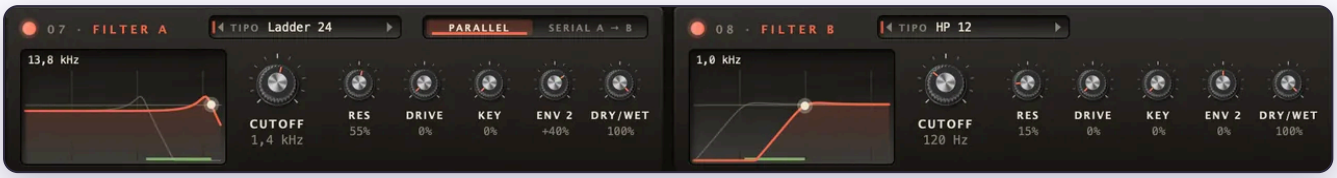

CONTROL	WHAT IT DOES
TIPO (type)	Ladder 24, Ladder 12, LP 12, HP 12, BP 12, Notch, Comb and Formant.
CUTOFF / RES	Cutoff and resonance. The Ladder self-oscillates at high resonance.
DRIVE	Saturation at the filter input.
KEY	How much the cutoff follows the played note.
ENV 2	How much envelope 2 opens (+) or closes (−) the filter.
DRY/WET	Blend of the unfiltered and filtered signal.
PARALLEL / SERIAL A → B	The two filters side by side or one after the other.



BLOCK	WHAT IT DOES
ENV 1 · VOLUME	ATTACK, DECAY, SUSTAIN, RELEASE and CURVA (curve) for the volume of each note.
ENV 2 · FILTER	Filter envelope (via the ENV 2 knob) and a MOD MATRIX source.
ENV 3 · MOD	For the MOD MATRIX only.
LFO 1 / LFO 2	7 shapes (Sine, Triangle, Saw Down, Saw Up, Square, S&H, Smooth Random); **SYNC** to the project tempo (DIVISION) or in Hz; Free, Retrig or Envelope mode; **RISE** fades the LFO in gradually.
MACROS 1–4	Free knobs: assign each one to destinations in the MOD MATRIX tab to move several things with one gesture.

STEP 4

4 MOD MATRIX

The `MOD MATRIX` tab holds 16 slots. Each one connects a **source** to a **destination**, with an amount:

	OPTIONS
SOURCE	Env 1, Env 2, Env 3, LFO 1, LFO 2, Velocity, Note, Mod Wheel, **Pressure**, **Slide**, Bend, Random, Macro 1–4.
DEST	Pitch, Position, Warp, Level and Pan of each oscillator; Pitch (All); Sub Level; Noise Level; Cutoff, Res and Drive of filters A and B; Volume; Pan; LFO Rate; Unison Detune.

> **EXAMPLE.** LFO 1 › Osc 1 Position makes the waveform morph over time. Mod Wheel › Filter A Cutoff opens the filter from the wheel. Macro 1 on several destinations becomes an "expression knob".

MPE and SEGURAR



- With `MPE` on, each note has its own bend (**MPE BEND** range, 12 to 96 st, default 48), pressure (**Pressure**) and slide (CC74, **Slide**), all available in the MOD MATRIX. Without MPE, aftertouch becomes Pressure.
- `SEGURAR` (hold) latches the arpeggio chord.
- MPE, MPE BEND and SEGURAR are performance settings: changing presets doesn't touch them.

STEP 5

5 Effects (FX tab)

The effects sit in a chain, in this order, each with its own on/off button:

EFFECT	WHAT IT DOES
HYPER	Thickens the sound with detuned copies (RATE, DETUNE, MIX).
DISTORTION	Tube, Hard Clip, Fold, Bitcrush, Downsample or Asym; DRIVE, TONE and MIX.
PHASER / **CHORUS**	Movement and width (RATE, DEPTH, MIX; the phaser has feedback).
DELAY	Tempo-synced echo, with a ping-pong option; FEEDBACK, TONE and MIX.
REVERB	Room, Plate or Hall.
EQ and **COMPRESSOR**	Finishing touches. The compressor has Single or Multiband mode (3 bands, compresses and lifts).

STEP 6

6 Arpeggiator (ARP tab)

Turn on `ARP ON` and hold a chord: the ARP plays the notes one by one in the project tempo. With the DAW playing, step 1 lands on the start of the bar; when stopped, the clock starts on the first key.

CONTROL	RANGE / DEFAULT	WHAT IT DOES
MODE	**Up**, Down, Up/Down, Down/Up, Random, As Played, Chord, Converge, Diverge	Note order.
RATE	1/32 to 4 bars · **1/16**	Length of each step, in the project tempo.
OCTAVES	1–4 · **1**	How many octaves the arpeggio covers.
GATE	5–100% · **60%**	Note length. 100% ties each note into the next; with VOICE set to Legato it becomes a slide.
SWING	0–100% · **0%**	Delays the even steps.
LENGTH	1–16 · **16**	How many steps the pattern has. Steps after LENGTH are dimmed and don't play.
ACCENT	0–100% · **50%**	Boost for notes on accented steps.
SCALE + ROOT	CHROMATIC + 13 scales	Snaps the notes to the scale. With a single key, the arpeggio climbs the scale from it.

The 16 steps and the ready-made patterns

- Each step can play or **rest** (dimmed step: no note, but the arpeggio keeps going) and can carry an **accent**. The step currently playing gets a light frame.
- **PADRÕES PRONTOS** (ready-made patterns): TODOS (all), ALTERNADO (alternating), CONTRATEMPO (offbeat), GALOPE (gallop), TRESILLO 3-3-2, ALEATÓRIO (random, also randomizes accents), ACENTO NO TEMPO (accent on the beat: 1, 5, 9, 13) and SEM ACENTO (no accent).
- With the ARP on, the sustain pedal (CC64) doesn't hold notes: use `SEGURAR`.

> **TIP.** The ARP category in the preset menu has 40 sounds with the arpeggiator already on: a good starting point.

STEP 7

7 Save your own presets

- In the preset menu (or the `+` button): Salvar como, Salvar alterações, Renomear, Apagar (save as, save changes, rename, delete). Yours live in the **USER** list.
- `Importar banco de presets…` (import preset bank) installs a **.qmrbank** bank, which appears below FACTORY 1. Importing a bank with the same name again replaces the old one. `Remover banco` (remove bank) sends it to the trash.

FAQ and troubleshooting

SITUATION	WHAT TO DO
No sound	Check the license (preset name › Licença…): until activated, the instrument stays silent. Check that the track receives MIDI, and the VOLUME.
An oscillator isn't heard	Check its LEVEL and OUTPUT, and that the filter it feeds (A or B) isn't closed.
The arpeggio won't stop	SEGURAR is on. Turn it off to release the chord.
The sustain pedal doesn't hold with the ARP	That's by design: with the arpeggiator on, use SEGURAR.
Notes with odd tuning on an MPE controller	Check that MPE is on and that MPE BEND matches the controller's range (the MPE standard is ±48 st).
High CPU	Reduce the oscillators' UNISON and the number of VOICES.
Sound distorted or too loud	Lower the filters' DRIVE, the DISTORTION or the VOLUME (the OUT meter is in the bottom-right corner).

30-second summary

1. QUIMERA on an instrument track → activate the license.
2. Pick a preset by category.
3. Change the **wavetable** and turn the oscillators' **POSITION**.
4. Shape it with **FILTER A / B** and the envelopes.
5. Add movement with **LFOs**, **MACROS** and the **MOD MATRIX**.
6. Finish in the **FX** tab; for sequences, turn on the **ARP**.
7. Save with **+**.

> **SUPPORT.** Questions, suggestions or issues: **contato@insidestudiosp.com.br** · **insidestudiosp.com.br**