## BYD FORKLIFT WITH GLOBAL PRESENCE IN

6 continents

More than 30 countries

Service more than 1,000 satisfied customers

Market share of lithium forklifts exceeds 75%

BYD forklift WeChat

BYD forklift micro-blog

BYD forklift official website

# GREEN LOGISTICS LEADER


## COUNTER BALANCE FORKLIFT SERIES


BYD COMPANY LIMITED facebook.com/bydcompany twitter.com/bydcompany youtube.com/bydcompany

www.byd.com


30

# BYD FORKLIFT ADVANTAGES

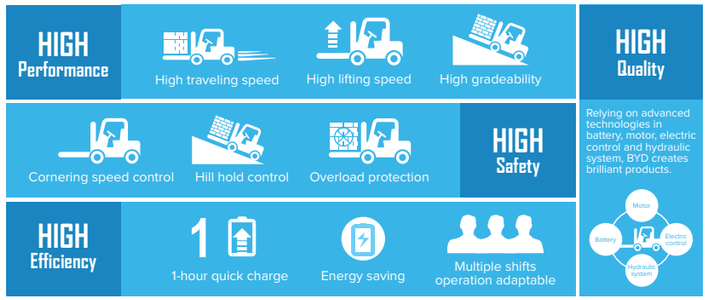

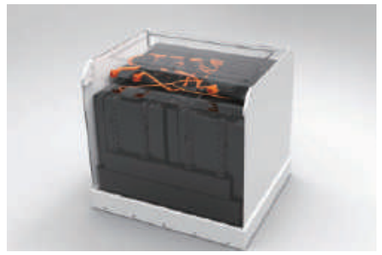



## High efficiency

BYD forklift equipped with high capacity lithium iron-phosphate battery and high efficiency charger, which ensures the strongest endurance and adapt to the most complex working conditions. It saves 90% charging time compared with lead-acid forklift.

## High safety

Compared to lead-acid battery forklift, BYD lithium iron-phosphate battery forklift produce zero emission or pollution during charging that need no special charging room. In order to ensure the safety and stability of the battery, there are a series of extreme tests including overcharge, over discharge, short circuit, oven, crush and burning to name a few. Strong scientific capability and rigorous testing processes comprehensively guarantee the safety and excellent performance of BYD lithium iron-phosphate battery.

## Long life cycle

Battery life is above 4,000 cycles or over 10 years. No need for battery replacement under normal use.

## Strong temperature adaptability

Applies to the working condition from minus 40 degree Celsius to 60 degree Celsius with good performance.

## Zero pollution, zero emission

The battery is composed of recyclable green materials. No heavy metal pollution. No toxic fumes or gas emissions during operation.

## Maintenance free

No need for daily battery check or periodic maintenance. No need for add electrolyte or distilled water.

## Opportunity charging

Opportunity charging during working break and lunch allow BYD forklift run all day. No memory effect.


## BYD lithium iron-phosphate battery meets the following standards

UL 1642 UL 2580 UN 38.3 QC / T 743

## Professional solutions for different industries


Food and beverage


Paper making


Fodder


Automobile and parts


Machine and manufacturing


Petrochemistry


Logistics


Household appliances

BYD forklift truck provides professional solutions for various industries to adapt to complex working conditions.

## Highlights of BYD counter balance forklift


Greater visibility through the mast


Finger control system


Four-way valve standard



LED lights



Full-color TFT display

## Functions


- Fork low position damper
- Speed limit when lifting
- Power-off protection
- Overload protection
- Low battery protection
- Operating presence sensing seat
- Turning speed limit
- Regenerative braking
- Hill hold control
- Blue light protection


## Counter balance forklift layout

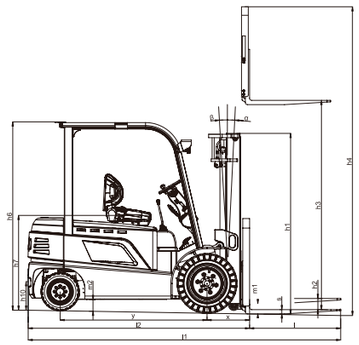


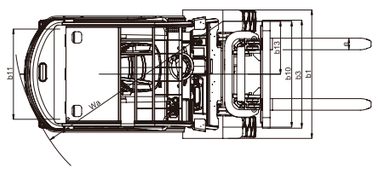



## Balance forklift load diagram and mast specifications
























## ECB16 / ECB18 ECB16S / ECB18S mast specifications

| ECB16 / ECB18 ECB16S / ECB18S | Lift height | Height, free lift | Height, mast lowered | Height, mast extended | Load back-rest height | Fore-rake angle | Back-rake angle |
|---|---|---|---|---|---|---|---|
| Duplex Standard Mast | 3000 | 125 | 2020 | 3985 | 950 | 5° | 7° |
| | 3300 | 125 | 2170 | 4285 | 950 | 5° | 7° |
| | 3500 | 125 | 2270 | 4485 | 950 | 5° | 7° |
| | 4000 | 125 | 2570 | 4985 | 950 | 5° | 7° |
| | 4500 | 125 | 2820 | 5485 | 950 | 5° | 5° |
| | 5000 | 125 | 3120 | 5985 | 950 | 5° | 5° |
| Duplex FFL Mast | 3000 | 1035 | 2020 | 3985 | 950 | 5° | 7° |
| | 3300 | 1185 | 2170 | 4285 | 950 | 5° | 7° |
| | 3500 | 1285 | 2270 | 4485 | 950 | 5° | 7° |
| | 4000 | 1585 | 2570 | 4985 | 950 | 5° | 7° |
| Triplex FFL (3 Cylinder) Mast | 4500 | 1068 | 2053 | 5485 | 950 | 5° | 5° |
| | 4800 | 1168 | 2153 | 5785 | 950 | 5° | 5° |
| | 5000 | 1218 | 2203 | 5985 | 950 | 5° | 5° |
| | 5500 | 1418 | 2403 | 6485 | 950 | 5° | 5° |
| | 6000 | 1688 | 2673 | 6985 | 950 | 5° | 3° |
| | 6500 | 1868 | 2853 | 7485 | 950 | 5° | 3° |
| Triplex FFL (4 Cylinder) Mast | 4000 | 810 | 1895 | 4985 | 950 | 5° | 5° |
| | 4500 | 1060 | 2045 | 5485 | 950 | 5° | 5° |
| | 4800 | 1160 | 2145 | 5785 | 950 | 5° | 5° |
| | 5000 | 1210 | 2195 | 5985 | 950 | 5° | 5° |
| | 5500 | 1410 | 2395 | 6485 | 950 | 5° | 5° / 3° |
| | 6000 | 1680 | 2665 | 6985 | 950 | 5° | 3° |
| | 6500 | 1860 | 2845 | 7485 | 950 | 5° | 3° |

## ECB20 / ECB25 MAST SPECIFICATIONS

| ECB20 / ECB25 | Lift height | Height, free lift | Height, mast lowered | Height, mast extended | Load back-rest height | Fore-rake angle | Back-rake angle |
|---|---|---|---|---|---|---|---|
| Duplex Standard Mast | 3000 | 140 | 1990 | 4240 | 950 | 5° | 9° |
| | 3500 | 140 | 2290 | 4740 | 950 | 5° | 9° |
| | 4000 | 140 | 2540 | 5240 | 950 | 5° | 9° |
| | 4500 | 140 | 2840 | 5740 | 950 | 5° | 6° |
| | 5000 | 140 | 3090 | 6240 | 950 | 5° | 6° |
| Duplex FFL Mast | 3000 | 1050 | 2040 | 4240 | 950 | 5° | 9° |
| | 3500 | 1300 | 2290 | 4740 | 950 | 5° | 9° |
| | 4000 | 1550 | 2540 | 5240 | 950 | 5° | 9° |
| Triplex FFL (3 Cylinder) Mast | 4000 | 953 | 1943 | 5240 | 950 | 5° | 6° |
| | 4500 | 1103 | 2093 | 5740 | 950 | 5° | 6° |
| | 4800 | 1203 | 2193 | 6040 | 950 | 5° | 6° |
| | 5000 | 1303 | 2293 | 6240 | 950 | 5° | 6° |
| | 5300 | 1373 | 2363 | 6540 | 950 | 5° | 6° |
| | 5500 | 1503 | 2493 | 6740 | 950 | 5° | 6° |
| | 6000 | 1703 | 2693 | 7240 | 950 | 5° | 6° |
| | 6500 | 1853 | 2843 | 7740 | 950 | 5° | 3° |

## ECB30 / ECB35 mast specifications

| ECB30 / ECB35 | Lift height | Height, free lift | Height, mast lowered | Height, mast extended | Load back-rest height | Fore-rake angle | Back-rake angle |
|---|---|---|---|---|---|---|---|
| Duplex Standard Mast | 3000 | 130 | 2105 | 4000 | 950 | 5° | 8° |
| | 3300 | 130 | 2255 | 4300 | 950 | 5° | 8° |
| | 3500 | 130 | 2355 | 4500 | 950 | 5° | 8° |
| | 3700 | 130 | 2455 | 4700 | 950 | 5° | 8° |
| | 4000 | 130 | 2605 | 5000 | 950 | 5° | 8° |
| | 4500 | 130 | 2905 | 5500 | 950 | 5° | 6° |
| | 4800 | 130 | 3055 | 5800 | 950 | 5° | 6° |
| | 5000 | 130 | 3205 | 6000 | 950 | 5° | 6° |
| | 5500 | 130 | 3455 | 6500 | 950 | 5° | 6° |
| | 6000 | 130 | 3705 | 7000 | 950 | 5° | 6° |
| Duplex FFL Mast | 3000 | 1105 | 2105 | 4000 | 950 | 5° | 8° |
| | 3300 | 1255 | 2255 | 4300 | 950 | 5° | 8° |
| | 3500 | 1355 | 2355 | 4500 | 950 | 5° | 8° |
| | 4000 | 1605 | 2605 | 5000 | 950 | 5° | 8° |
| Triplex FFL (3 Cylinder) Mast | 4000 | 1090 | 2090 | 5000 | 950 | 5° | 6° |
| | 4350 | 1205 | 2205 | 5350 | 950 | 5° | 6° |
| | 4500 | 1255 | 2255 | 5500 | 950 | 5° | 6° |
| | 4800 | 1355 | 2355 | 5800 | 950 | 5° | 6° |
| | 5000 | 1420 | 2420 | 6000 | 950 | 5° | 6° |
| | 5300 | 1520 | 2520 | 6300 | 950 | 5° | 6° |
| | 5500 | 1585 | 2585 | 6500 | 950 | 5° | 6° |
| | 6000 | 1750 | 2750 | 7000 | 950 | 5° | 6° |
| | 6500 | 1910 | 2910 | 7500 | 950 | 5° | 3° |

## ECB40 / ECB45 / ECB50 mast specifications

| ECB40 / ECB45 / ECB50 | Lift height | Height, free lift | Height, mast lowered | Height, mast extended | Load back-rest height | Fore-rake angle | Back-rake angle |
|---|---|---|---|---|---|---|---|
| Duplex Standard Mast | 3000 | 145 | 2350 | 4255 | 1200 | 6° | 8° |
| | 3500 | 145 | 2600 | 4755 | 1200 | 6° | 8° |
| | 4000 | 145 | 2850 | 5255 | 1200 | 6° | 8° |
| | 4500 | 145 | 3100 | 5755 | 1200 | 6° | 6° |
| | 5000 | 145 | 3350 | 6255 | 1200 | 6° | 6° |
| Duplex FFL Mast | 3000 | 1035 | 2235 | 4255 | 1200 | 6° | 8° |
| | 3300 | 1185 | 2385 | 4555 | 1200 | 6° | 8° |
| | 3500 | 1285 | 2485 | 4755 | 1200 | 6° | 8° |
| | 4000 | 1585 | 2785 | 5255 | 1200 | 6° | 8° |
| Triplex FFL (3 Cylinder) Mast | 4000 | 945 | 2145 | 5255 | 1200 | 6° | 6° |
| | 4500 | 1115 | 2315 | 5755 | 1200 | 6° | 6° |
| | 4800 | 1215 | 2415 | 6055 | 1200 | 6° | 6° |
| | 5000 | 1285 | 2485 | 6255 | 1200 | 6° | 6° |
| | 5500 | 1445 | 2645 | 6755 | 1200 | 6° | 6° |
| | 6000 | 1615 | 2815 | 7255 | 1200 | 6° | 6° |
| | 6500 | 1785 | 2985 | 7755 | 1200 | 6° | 3° |
| | 6800 | 1885 | 3085 | 8055 | 1200 | 6° | 3° |

# COUNTER BALANCE FORKLIFT SPECIFICATIONS

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Identification | Manufacturer | | | BYD | BYD | BYD | BYD | BYD | BYD |
| | Model | | | ECB16 | ECB18 | ECB16S | ECB18S | ECB20B | ECB25B |
| | Driver | | | Electric | Electric | Electric | Electric | Electric | Electric |
| | Operator type | | | Seated | Seated | Seated | Seated | Seated | Seated |
| | Rated capacity | Q | kg | 1600 | 1800 | 1600 | 1800 | 2000 | 2500 |
| | Load center | c | mm | 500 | 500 | 500 | 500 | 500 | 500 |
| | Load distance, center of drive axle to fork | x | mm | 365 | 365 | 420 | 420 | 425 | 425 |
| | Wheelbase | y | mm | 1360 | 1360 | 1400 | 1400 | 1505 | 1505 |
| Weights | Service weight including battery | | kg | 3100 | 3300 | 3340 | 3490 | 3600 | 4200 |
| | Axle load, with load,front/rear | | kg | 4083/617 | 4495/605 | 4206/734 | 4553/737 | 4901/699 | 5811/889 |
| | Axle load, without load, front/rear | | kg | 1466/1634 | 1551/1749 | 1555/1785 | 1570/1920 | 1672/1928 | 1775/2425 |
| Wheels | Tyres | | | SE | SE | SE | SE | SE | SE |
| | Tyre size, front | | | 18x7-8 | 18x7-8 | 6.00-9 | 6.00-9 | 21x8-9 | 21x8-9 |
| | Tyre size, rear | | | 15x4.5-8 | 15x4.5-8 | 16x6-8 | 16x6-8 | 18x7-8 | 18x7-8 |
| | Wheels, number front/rear (x=driveing wheels) | | | 2x/2 | 2x/2 | 2x/2 | 2x/2 | 2x/2 | 2x/2 |
| | Track width, front | b10 | mm | 890 | 890 | 890 | 890 | 1000 | 1000 |
| | Track width, rear | b11 | mm | 190 | 190 | 870 | 870 | 955 | 955 |
| Dimensions | Tilt of mast/fork carriage forward/backward | α/β | ° | 5/7 | 5/7 | 5/8 | 5/8 | 5/8 | 5/8 |
| | Height, mast lowered | h1 | mm | 2020 | 2020 | 2020 | 2020 | 2030 | 2030 |
| | Free lift | h2 | mm | 125 | 125 | 110 | 110 | 140 | 140 |
| | Lift height | h3 | mm | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| | Height, mast extended | h4 | mm | 3985 | 3985 | 4040 | 4040 | 3990 | 3990 |
| | Height of overhead guard | h6 | mm | 2050 | 2050 | 2060 | 2060 | 2195 | 2195 |
| | Seat height | h7 | mm | 985 | 985 | 1005 | 1005 | 1100 | 1100 |
| | Coupling height | h10 | mm | 480 | 480 | 270 | 270 | 333 | 333 |
| | Overall length | l1 | mm | 2935 | 3005 | 3195 | 3195 | 3375 | 3375 |
| | Length to face of forks | l2 | mm | 1935 | 2005 | 2125 | 2125 | 2305 | 2305 |
| | Overall width | b1 | mm | 1050 | 1050 | 1050 | 1050 | 1195 | 1195 |
| | Fork dimensions | s/e/l | mm | 35/100/1000 | 35/100/1000 | 40/100/1000 | 40/100/1000 | 40/120/1070 | 40/120/1070 |
| | Carriage Type(A/B) according ISO 2328 | | | 2A | 2A | 2A | 2A | 2A | 2A |
| | Fork carriage width | b3 | mm | 1040 | 1040 | 1044 | 1044 | 1085 | 1085 |
| | Ground clearance, with load,below mast | m1 | mm | 95 | 95 | 85 | 85 | 95 | 95 |
| | Ground clearance, center of wheelbase | m2 | mm | 95 | 95 | 85 | 85 | 105 | 105 |
| | Aisle width for pallets 1000x1200 crossways | Ast | mm | 3261 | 3331 | 3799 | 3799 | 3646 | 3646 |
| | Aisle width for pallets 800x1200 crossways | Ast | mm | 3385 | 3455 | 3600 | 3600 | 3845 | 3845 |
| | Min. turning radius | Wa | mm | 1570 | 1640 | 1860 | 1860 | 2020 | 2020 |
| | Inner turning radius | b13 | mm | 0 | 0 | 537 | 537 | 555 | 555 |
| Performance | Travel speed, with/without load | | Km/h | 16/16 | 16/16 | 16/16 | 16/16 | 20/20 | 20/20 |
| | Lift speed, with/without load | | mm/s | 500/550 | 500/550 | 420/450 | 420/450 | 420/450 | 420/450 |
| | Lowering speed, with/without load | | mm/s | 530/500 | 530/500 | 520/480 | 520/480 | 500/400 | 500/400 |
| | Max.drawbar pull, with/without load | | KN | 9.0/7.9 | 9.0/8.0 | 10.0/9.5 | 10.0/9.5 | 12.7/9.0 | 12.5/9.5 |
| | Max.gradeability, with/without load | | % | 20/20 | 18/20 | 20/20 | 20/20 | 20/20 | 20/20 |
| | Acceleration time,with/without load | | s | 4.5/4.0 | 4.5/4.0 | 6.0/5.0 | 6.0/5.0 | 4.9/4.3 | 4.9/4.3 |
| | Service brake | | | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. |
| Electrics | Drive motor rating S2 60 min. | | kW | 5×2 | 5×2 | 8.5 | 8.5 | 8×2 | 8×2 |
| | Lift motor rating at S3 15% | | kW | 16 | 16 | 16 | 16 | 20.7 | 20.7 |
| | Battery voltage, nominal capacity | | V/Ah | 80/270 | 80/270 | 80/270 | 80/270 | 80/270 | 80/270 |
| | Battery weight | | kg | 640 | 640 | 650 | 650 | 540 | 840 |
| Others | Motor control system | | | AC | AC | AC | AC | AC | AC |
| | Operating pressure for attachments | | Mpa | 16 | 18 | ≤16 | ≤16 | 14.2 | 16.8 |
| | Sound level at the driver's ear | | dB(A) | ≤75 | ≤75 | ≤75 | ≤75 | ≤75 | ≤75 |
| | Towing coupling, type | | | PIN | PIN | PIN | PIN | PIN | PIN |

# COUNTER BALANCE FORKLIFT SPECIFICATIONS

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Identification | Manufacturer | | | BYD | BYD | BYD | BYD | BYD |
| | Model | | | ECB27B | ECB20D | ECB25D | ECB30B | ECB35B |
| | Driver | | | Electric | Electric | Electric | Electric | Electric |
| | Operator type | | | Seated | Seated | Seated | Seated | Seated |
| | Rated capacity | Q | kg | 2700 | 2000 | 2500 | 3000 | 3500 |
| | Load center | c | mm | 600 | 500 | 500 | 500 | 500 |
| | Load distance, center of drive axle to fork | x | mm | 430 | 425 | 425 | 460 | 460 |
| | Wheelbase | y | mm | 1505 | 1505 | 1505 | 1725 | 1725 |
| Weights | Service weight including battery | | kg | 4460 | 3620 | 4220 | 4840 | 5440 |
| | Axle load, with load,front/rear | | kg | 6338/822 | 4920/700 | 5830/890 | 6693/1147 | 7722/1218 |
| | Axle load, without load, front/rear | | kg | 1799/2661 | 1690/1930 | 1793/2427 | 2023/2817 | 2274/3166 |
| Wheels | Tyres | | | Cushion | SE | SE | SE | SE |
| | Tyre size, front | | | 21x8x15 | 21x8-9 | 21x8-9 | 23x10-12 | 23x10-12 |
| | Tyre size, rear | | | 18x6x12.125 | 18x7-8 | 18x7-8 | 200/50-10 | 200/50-10 |
| | Wheels, number front/rear (x=driveing wheels) | | | 2x/2 | 2x/2 | 2x/2 | 2x/2 | 2x/2 |
| | Track width, front | b10 | mm | 1000 | 970 | 970 | 1110 | 1110 |
| | Track width, rear | b11 | mm | 965 | 955 | 955 | 955 | 955 |
| Dimensions | Tilt of mast/fork carriage forward/backward | α/β | ° | 5/5 | 6/9 | 6/9 | 5/8 | 5/8 |
| | Height, mast lowered | h1 | mm | 2030 | 1990 | 1990 | 2105 | 2105 |
| | Free lift | h2 | mm | 140 | 140 | 140 | 130 | 130 |
| | Lift height | h3 | mm | 3000 | 3000 | 3000 | 3000 | 3000 |
| | Height, mast extended | h4 | mm | 3990 | 4240 | 4240 | 4000 | 4000 |
| | Height of overhead guard | h6 | mm | 2195 | 2195 | 2195 | 2215 | 2215 |
| | Seat height | h7 | mm | 1100 | 1100 | 1100 | 1140 | 1140 |
| | Coupling height | h10 | mm | 333 | 333 | 333 | 333 | 333 |
| | Overall length | l1 | mm | 3390 | 3375 | 3375 | 3630 | 3630 |
| | Length to face of forks | l2 | mm | 2320 | 2305 | 2305 | 2560 | 2560 |
| | Overall width | b1 | mm | 1195 | 1195 | 1195 | 1360 | 1360 |
| | Fork dimensions | s/e/l | mm | 45/125/1070 | 40/120/1070 | 40/120/1070 | 50/125/1070 | 50/125/1070 |
| | Carriage Type(A/B) according ISO 2328 | | | 3A | 2A | 2A | 3A | 3A |
| | Fork carriage width | b3 | mm | 1085 | 1085 | 1085 | 1145 | 1145 |
| | Ground clearance, with load,below mast | m1 | mm | 95 | 95 | 95 | 110 | 110 |
| | Ground clearance, center of wheelbase | m2 | mm | 105 | 105 | 105 | 130 | 130 |
| | Aisle width for pallets 1000x1200 crossways | Ast | mm | 3646 | 3646 | 3646 | 3875 | 3875 |
| | Aisle width for pallets 800x1200 crossways | Ast | mm | 3773 | 3845 | 3845 | 4070 | 4070 |
| | Min. turning radius | Wa | mm | 1895 | 2020 | 2020 | 2210 | 2210 |
| | Inner turning radius | b13 | mm | 0 | 555 | 555 | 485 | 485 |
| Performance | Travel speed, with/without load | | Km/h | 18/18 | 16/16 | 16/16 | 20/20 | 20/20 |
| | Lift speed, with/without load | | mm/s | 420/450 | 420/450 | 420/450 | 380/450 | 380/450 |
| | Lowering speed, with/without load | | mm/s | 500/400 | 500/400 | 500/400 | 550/450 | 550/450 |
| | Max.drawbar pull, with/without load | | KN | 12/10 | 12.7/9.0 | 12.5/9.5 | 17.4/12.2 | 17.2/13.6 |
| | Max.gradeability, with/without load | | % | 18/20 | 16/20 | 16/20 | 20/20 | 20/20 |
| | Acceleration time,with/without load | | s | 5.1/4.5 | | | 4.9/4.3 | 4.9/4.3 |
| | Service brake | | | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. |
| Electrics | Drive motor rating S2 60 min. | | kW | 8×2 | 8.5 | 8.5 | 10×2 | 10×2 |
| | Lift motor rating at S3 15% | | kW | 20.7 | 20.7 | 20.7 | 24 | 24 |
| | Battery voltage, nominal capacity | | V/Ah | 80/270 | 80/270 | 80/270 | 80/540 | 80/540 |
| | Battery weight | | kg | 840 | 540 | 840 | 860 | 1460 |
| Others | Motor control system | | | AC | AC | AC | AC | AC |
| | Operating pressure for attachments | | Mpa | 17.2 | 14.2 | 16.8 | 16 | 18 |
| | Sound level at the driver's ear | | dB(A) | ≤75 | ≤75 | ≤75 | ≤75 | ≤75 |
| | Towing coupling, type | | | PIN | PIN | PIN | PIN | PIN |

# COUNTER BALANCE FORKLIFT SPECIFICATIONS

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Identification | Manufacturer | | | BYD | BYD | BYD | BYD | BYD |
| | Model | | | ECB30D | ECB35D | ECB40 B/C | ECB45 B/C | ECB50 B/C |
| | Driver | | | Electric | Electric | Electric | Electric | Electric |
| | Operator type | | | Seated | Seated | Seated | Seated | Seated |
| | Rated capacity | Q | kg | 3000 | 3500 | 4000 | 4500 | 5000 |
| | Load center | c | mm | 500 | 500 | 500 | 500 | 500 |
| | Load distance, center of drive axle to fork | x | mm | 500 | 500 | 555 | 555 | 555 |
| | Wheelbase | y | mm | 1725 | 1725 | 2000 | 2000 | 2000 |
| Weights | Service weight including battery | | kg | 5000 | 5600 | 6750 | 7030 | 7350 |
| | Axle load, with load,front/rear | | kg | 7072/928 | 8113/987 | 3331/3419 | 3315/3715 | 3322/4028 |
| | Axle load, without load, front/rear | | kg | 2333/2667 | 2584/3016 | 9441/1309 | 10188/1342 | 10960/1390 |
| Wheels | Tyres | | | SE | SE | SE | SE | SE |
| | Tyre size, front | | | 28x9-15 | 28x9-15 | 28x12.5-15 | 28x12.5-15 | 28x12.5-15 |
| | Tyre size, rear | | | 200/50-10 | 200/50-10 | 21x8-9 | 21x8-9 | 21x8-9 |
| | Wheels, number front/rear (x=driveing wheels) | | | 2x/2 | 2x/2 | 2x/2 | 2x/2 | 2x/2 |
| | Track width, front | b10 | mm | 1120 | 1120 | 1216 | 1216 | 1216 |
| | Track width, rear | b11 | mm | 955 | 955 | 1130 | 1130 | 1130 |
| Dimensions | Tilt of mast/fork carriage forward/backward | α/β | ° | 5/8 | 5/8 | 6/8 | 6/8 | 6/8 |
| | Height, mast lowered | h1 | mm | 2105 | 2105 | 2350 | 2350 | 2350 |
| | Free lift | h2 | mm | 130 | 130 | 130 | 130 | 130 |
| | Lift height | h3 | mm | 3000 | 3000 | 3000 | 3000 | 3000 |
| | Height, mast extended | h4 | mm | 4000 | 4000 | 4240 | 4240 | 4240 |
| | Height of overhead guard | h6 | mm | 2215 | 2215 | 2360 | 2360 | 2360 |
| | Seat height | h7 | mm | 1140 | 1140 | 1260 | 1260 | 1260 |
| | Coupling height | h10 | mm | 333 | 333 | 470 | 470 | 470 |
| | Overall length | l1 | mm | 3630 | 3630 | 3990 | 3990 | 3990 |
| | Length to face of forks | l2 | mm | 2560 | 2560 | 2920 | 2920 | 2920 |
| | Overall width | b1 | mm | 1360 | 1360 | 1516 | 1516 | 1516 |
| | Fork dimensions | s/e/l | mm | 50/125/1070 | 50/125/1070 | 55/150/1070 | 55/150/1070 | 55/150/1070 |
| | Carriage Type(A/B) according ISO 2328 | | | 3A | 3A | 3A | 3A | 3A |
| | Fork carriage width | b3 | mm | 1145 | 1145 | 1500 | 1500 | 1500 |
| | Ground clearance, with load,below mast | m1 | mm | 110 | 110 | 130/150 | 130/150 | 130/150 |
| | Ground clearance, center of wheelbase | m2 | mm | 130 | 130 | 160/160 | 160/160 | 160/160 |
| | Aisle width for pallets 1000x1200 crossways | Ast | mm | 3970 | 3970 | 4550 | 4550 | 4550 |
| | Aisle width for pallets 800x1200 crossways | Ast | mm | 4170 | 4170 | 4750 | 4750 | 4750 |
| | Min. turning radius | Wa | mm | 2270 | 2270 | 2600 | 2600 | 2600 |
| | Inner turning radius | b13 | mm | 560 | 560 | 810 | 810 | 810 |
| Performance | Travel speed, with/without load | | Km/h | 15/16 | 15/16 | 18/18 | 18/18 | 18/18 |
| | Lift speed, with/without load | | mm/s | 380/450 | 380/450 | 350/450 | 350/450 | 350/450 |
| | Lowering speed, with/without load | | mm/s | 550/450 | 550/450 | 500/400 | 460/400 | 500/400 |
| | Max.drawbar pull, with/without load | | KN | 14.5/13 | 14/14 | 28/18 | 28/18 | 28/18 |
| | Max.gradeability, with/without load | | % | 15/20 | 15/20 | 20/20 | 20/20 | 20/20 |
| | Acceleration time,with/without load | | s | | | 4.5/4 | 4.5/4 | 4.5/4 |
| | Service brake | | | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. | Mech./Hydr. |
| Electrics | Drive motor rating S2 60 min. | | kW | 21.5 | 21.5 | 2x15 | 2x15 | 2x15 |
| | Lift motor rating at S3 15% | | kW | 24 | 24 | 25.4 | 25.4 | 25.4 |
| | Battery voltage, nominal capacity | | V/Ah | 80/540 | 80/540 | 64.8 | 64.8 | 64.8 |
| | Battery weight | | kg | 860 | 1460 | 900 | 900 | 900 |
| Others | Motor control system | | | AC | AC | AC | AC | AC |
| | Operating pressure for attachments | | Mpa | 16 | 18 | ≤17 | ≤17 | ≤17 |
| | Sound level at the driver's ear | | dB(A) | ≤75 | ≤75 | ≤75 | ≤75 | ≤75 |
| | Towing coupling, type | | | PIN | PIN | PIN | PIN | PIN |

# MEDIUM & LIGHT DUTY COUNTER BALANCE FORKLIFT SERIES



### ECB16
Load capacity: 1.6 ton
Curb weight: 3,100 kg
Min. turning radius: 1,570 mm
Voltage: 80 V
Battery capacity: 270 Ah



### ECB18
Load capacity: 1.8 ton
Curb weight: 3,300 kg
Min. turning radius: 1,640 mm
Voltage: 80 V
Battery capacity: 270 Ah



### ECB16S
Load capacity: 1.6 ton
Curb weight: 3,100 kg
Min. turning radius: 1,570 mm
Voltage: 80 V
Battery capacity: 270 Ah



### ECB18S
Load capacity: 1.8 ton
Curb weight: 3,300 kg
Min. turning radius: 1,640 mm
Voltage: 80 V
Battery capacity: 270 Ah



### ECB20
Load capacity: 2.0 ton
Curb weight: 3,600 kg
Min. turning radius: 2,020 mm
Voltage: 80 V
Battery capacity: 270Ah/540Ah



### ECB25
Load capacity: 2.5 ton
Curb weight: 4200 kg
Min. turning radius: 2,020 mm
Voltage: 80 V
Battery capacity: 270Ah/540Ah



### ECB30
Load capacity: 3.0 ton
Curb weight: 4,840 kg
Min. turning radius: 2,210 mm
Voltage: 80 V
Battery capacity: 270Ah/540Ah



### ECB35
Load capacity: 3.5 ton
Curb weight: 5,440 kg
Min. turning radius: 2,210 mm
Voltage: 80 V
Battery capacity: 540 Ah



### ECB40
Load capacity: 4 ton
Curb weight: 6750 kg
Min. turning radius: 2600 mm
Voltage: 80 V
Battery capacity: 540Ah/810Ah



### ECB45
Load capacity: 4.5 ton
Curb weight: 7030 kg
Min. turning radius: 2600 mm
Voltage: 80 V
Battery capacity: 540Ah/810Ah



### ECB50
Load capacity: 5 ton
Curb weight: 7350 kg
Min. turning radius: 2600 mm
Voltage: 80 V
Battery capacity: 540Ah/810Ah

## Standard configurations

- BYD lithium-iron-phosphate battery
- 80V 270Ah/540Ah battery
- 100A quick charger
- GB standard charge interface
- Three-phase AC asynchronous motor
- 1,070mm fork
- 3m duplex STD Mast
- 1,200mm load back-rest
- Multifunction dashboard
- Rear handle with alarm
- LED head light and tail light

## Optional configurations

- Finger / twin stick control system
- 200A quick charger
- Integral side shifter
- Grammer MSG65 seat
- Driving cab / roof / front windshield / wiper
- Reversing alarm / reversing voice alarm
- Hermetic wet type disk brake / dual pedal
- Fan / fire extinguisher
- Panoramic rear-view mirror / strobe light
- Rear working light
- Special key

## Charging time (Unit: hour)

| Charger | Battery | |
|---|---|---|
| | 80V 270Ah | 80V 540Ah |
| 100A Standard | About 2.5 | About 5 |
| 200A Option | About 1.2 | About 2.5 |