MAST SPECIFICATION and RATED CAPACITIES

B40X-7

Mast Type	Max. Fork Height		Mast Lowered Height		Extended Height w/ Load Backrest		Free Lift w/ Load Backrest		Rated Load Capacities			
									Tilt Angle		Load capacities	
									Fwd	Bwd	LC 500mm	LC 24in
	mm	in	mm	in	mm	in	mm	in	deg	deg	kg	lb
STD	3000	118	2190	86	4265	168	160	6	6	9	4000	8000
	3300	130	2340	92	4565	180	160	6	6	9	4000	8000
	3650	144	2515	99	4915	194	160	6	6	9	4000	8000
	4000	157	2840	112	5265	207	160	6	6	9	4000	8000
	4250	167	2965	117	5515	217	160	6	6	9	4000	8000
	4850	191	3415	134	6115	241	160	6	6	5	4000	8000
	5250	207	3615	142	6515	256	160	6	6	5	3940	8000
FF	3000	118	2170	85	4240	167	970	38	6	9	4000	8000
FFT	4000	157	2050	81	5265	207	850	33	6	9	4000	8000
	4250	167	2140	84	5530	218	940	37	6	9	4000	8000
	4500	177	2225	88	5790	228	1025	40	6	9	4000	8000
	4700	185	2290	90	5980	235	1090	43	6	9	4000	8000
	5150	203	2440	96	6430	253	1240	49	6	5	3940	8000
	5600	220	2590	102	6880	271	1390	55	6	5	3810	7800
	6050	238	2740	108	7330	289	1540	61	6	3	3670	7500

B45X-7

Mast Type	Max. Fork Height		Mast Lowered Height		Extended Height w/ Load Backrest		Free Lift w/ Load Backrest		Rated Load Capacities			
									Tilt Angle		Load capacities	
									Fwd	Bwd	LC 500mm	LC 24in
	mm	in	mm	in	mm	in	mm	in	deg	deg	kg	lb
STD	3000	118	2185	86	4265	168	160	6	6	9	4500	9000
	3300	130	2335	92	4565	180	160	6	6	9	4500	9000
	3650	144	2510	99	4915	194	160	6	6	9	4500	9000
	4000	157	2835	112	5265	207	160	6	6	9	4500	9000
	4250	167	2960	117	5515	217	160	6	6	9	4500	9000
	4850	191	3410	134	6115	241	160	6	6	5	4500	9000
	5250	207	3610	142	6515	256	160	6	6	5	4500	9000
FF	3000	118	2165	85	4240	167	965	38	6	9	4500	9000
FFT	4000	157	2050	81	5265	207	850	33	6	9	4500	9000
	4250	167	2135	84	5530	218	935	37	6	9	4500	9000
	4500	177	2220	87	5785	228	1020	40	6	9	4500	9000
	4700	185	2285	90	5980	235	1085	43	6	9	4500	9000
	5150	203	2435	96	6430	253	1235	49	6	5	4500	9000
	5600	220	2585	102	6880	271	1385	55	6	5	4350	8800
	6050	238	2735	108	7330	289	1535	60	6	3	4225	8500

B50XC-7

Mast Type	Max. Fork Height		Mast Lowered Height		Extended Height w/ Load Backrest		Free Lift w/ Load Backrest		Rated Load Capacities			
									Tilt Angle		Load capacities	
									Fwd	Bwd	LC 500mm	LC 24in
	mm	in	mm	in	mm	in	mm	in	deg	deg	kg	lb
STD	3000	118	2185	86	4265	168	160	6	6	9	4990	9980
	3300	130	2335	92	4565	180	160	6	6	9	4990	9980
	3450	136	2410	95	4715	186	160	6	6	9	4990	9980
	3650	144	2510	99	4915	194	160	6	6	9	4990	9980
	4000	157	2835	112	5265	207	160	6	6	9	4990	9980
	4250	167	2960	117	5515	217	160	6	6	9	4990	9980
	4850	191	3410	134	6115	241	160	6	6	5	4990	9980
FF	3000	118	2165	85	4240	167	965	38	6	9	4990	9980
FFT	4000	157	2050	81	5265	207	850	33	6	9	4990	9980
	4250	167	2135	84	5530	218	935	37	6	9	4990	9980
	4500	177	2220	87	5785	228	1020	40	6	9	4990	9980
	4700	185	2285	90	5980	235	1085	43	6	9	4990	9980
	5150	203	2435	96	6430	253	1235	49	6	5	4810	9800
	5600	220	2585	102	6880	271	1385	55	6	5	4660	9500
	6050	238	2735	108	7330	289	1535	60	6	3	4480	9200
	6500	256	2885	114	7780	306	1685	66	6	3	4340	8800

B50X-7

Mast Type	Max. Fork Height		Mast Lowered Height		Extended Height w/ Load Backrest		Free Lift w/ Load Backrest		Rated Load Capacities			
									Tilt Angle		Load capacities	
									Fwd	Bwd	LC 500mm	LC 24in
	mm	in	mm	in	mm	in	mm	in	deg	deg	kg	lb
STD	3000	118	2185	86	4415	174	160	6	6	9	5000	10000
	3300	130	2335	92	4715	186	160	6	6	9	5000	10000
	3450	136	2410	95	4865	192	160	6	6	9	5000	10000
	3650	144	2510	99	5065	199	160	6	6	9	5000	10000
	4000	157	2835	112	5415	213	160	6	6	9	5000	10000
	4250	167	2960	117	5665	223	160	6	6	9	5000	10000
	4850	191	3410	134	6265	247	160	6	6	5	5000	10000
FF	3000	118	2165	85	4390	173	815	32	6	9	5000	10000
FFT	4000	157	2050	81	5415	213	700	28	6	9	5000	10000
	4250	167	2135	84	5680	224	785	31	6	9	5000	10000
	4500	177	2220	87	5935	234	870	34	6	9	5000	10000
	4700	185	2285	90	6130	241	935	37	6	9	5000	10000
	5150	203	2435	96	6580	259	1085	43	6	5	4810	9800
	5600	220	2585	102	7030	277	1235	49	6	5	4660	9500
	6050	238	2735	108	7480	294	1385	55	6	3	4480	9200
	6500	256	2885	114	7930	312	1535	60	6	3	4340	8800

Note : Mast Specifications & Rated Capacities are based on standard chassis with pneumatic tire and without side shifter.

2020 Sep

Doosan Industrial Vehicle
Web site : www.doosan-iv.com

AUTHORIZED DEALER

B40X-7 / B45X-7 / B50XC-7 / B50X-7

7 SERIES FORKLIFTS

Electric 4.0 to 5.0 ton (8000 to 10000 lb) capacity


4 wheel



Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer			DOOSAN	DOOSAN	DOOSAN
	1.2	Manufacturer's type designation			B40X-7	B45X-7	B50XC-7	B50X-7
	1.3	Drive : electric(battery or mains) ,diesel, petrol ,fuel gas, manual			Electric	Electric	Electric	Electric
	1.4	Operator type : hand, pedestrian, standing, seated, order-picker			Driver seated	Driver seated	Driver Seated	Driver Seated
	1.5	Load capacity/rated load	kg(lb)	Q	4000(8000)	4500(9000)	4990(9980)	5000(10000)
	1.6	Load centre distance	mm(in)	c	500(24)	500(24)	500(24)	500(24)
	1.8	Load distance, centre of drive axle to fork	mm(in)	x	572 (22.5)	572 (22.5)	572 (22.5)	572 (22.5)
	1.9	Wheelbase	mm(in)	y	2000 (78.7)	2000 (78.7)	2000 (78.7)	2000 (78.7)
Weights	2.1	Service weight (with min. weight of battery)	kg(lb)		7012(15459)	7427(16374)	7734(17051)	7763(17114)
	2.2	Axle loading, loaded front/rear	kg(lb)		9874 / 1138 (21768 / 2509)	10607 / 1320 (23384 / 2910)	11415 / 1318 (25166 / 2906)	11450 / 1312 (25243 / 2892)
	2.3	Axle loading, unloaded front/rear	kg(lb)		3730 / 3282 (8223 / 7236)	3695 / 3732 (8146 / 8228)	3735 / 3998 (8234 / 8814)	3770 / 3992 (8311 / 8801)
Wheels & Tyres	3.1	Tires: pneumatic (P), superelastic (SE), cushion (C)			SE	SE	SE	SE
	3.2	Tire size, front			250 - 15	28 x 12.5 - 15	28 x 12.5 - 15	28 x 12.5 - 15
	3.3	Tire size, rear			7.00 - 12	7.00 - 12	7.00 - 12	7.00 - 12
	3.5	Wheels, number front/rear (x=driven wheels)			2/2	2/2	2/2	2/2
	3.6	Tread width, front	mm(in)	b10	1168(46.0)	1160(45.7)	1160(45.7)	1160(45.7)
	3.7	Tread width, rear	mm(in)	b11	1111(43.7)	1111(43.7)	1111(43.7)	1111(43.7)
Basic dimensions	4.1	Tilt of mast/fork carriage forward (α)/backward(β)	deg	α / β	6 / 9	6 / 9	6 / 9	6 / 9
	4.2	Height, mast lowered	mm(in)	h1	2330(91.7)	2340(92.1)	2340(92.1)	2340(92.1)
	4.3	Free lift	mm(in)	h2	150(5.9)	160(6.3)	160(6.3)	160(6.3)
	4.4	Lift (with STD 2-stage mast)	mm(in)	h3	3250(128)	3250(128.0)	3250(128.0)	3250(128.0)
		Lift height		h23	3300(129.9)	3300(129.9)	3300(129.9)	3300(129.9)
	4.5	Height, mast extended	mm(in)	h4	4170(164.2)	4180(164.6)	4180(164.6)	4205(165.6)
	4.7	Height to top of overhead guard	mm(in)	h6	2345(92.3)	2350(92.5)	2350(92.5)	2350(92.5)
	4.8	Seat height/stand height	mm(in)	h7	1297(51.1)	1303(51.3)	1303(51.3)	1303(51.3)
	4.12	Towing coupling height	mm(in)	h10	415(16.3)	415(16.3)	415(16.3)	415(16.3)
	4.19	Overall length	mm(in)	l1	4007(157.8)	4007(157.8)	4037(158.9)	4037(158.9)
	4.20	Length to face of forks	mm(in)	l2	2957(116.4)	2957(116.4)	2987(117.6)	2987(117.6)
	4.21	Overall width	mm(in)	b1	1470(57.9)	1470(57.9)	1470(57.9)	1470(57.9)
	4.22	Fork dimensions	mm(in)	s / e / l	50 / 150 / 1050 (2.0 / 5.9 / 41.3)	50 / 150 / 1050 (2.0 / 5.9 / 41.3)	50 / 150 / 1050 (2.0 / 5.9 / 41.3)	50 / 150 / 1050 (2.0 / 5.9 / 41.3)
	4.23	Fork carriage ISO 2328. Class/type A, B			III A	III A	III A	IV A
	4.24	Fork carriage width	mm(in)	b3	1250(49.2)	1250(49.2)	1250(49.2)	1330(52.4)
	4.24a	Fork Spacing (min/max)	mm(in)		310 x 1182 (12.2 / 46.5)	310 x 1182 (12.2 / 46.5)	310 x 1182 (12.2 / 46.5)	340 x 1290 (13.4 / 50.8)
	4.31	Ground clearance, with load, below mast	mm(in)	m1	120(4.7)	130(5.1)	130(5.1)	130(5.1)
	4.32	Ground clearance, centre of wheelbase	mm(in)	m2	160(6.3)	160(6.3)	160(6.3)	160(6.3)
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	mm(in)	Ast	4416(173.9)	4417(173.9)	4442(174.9)	4442(174.9)
	4.34.1	Aisle width for pallets 800 x 1200 lengthways	mm(in)	Ast	4655(183.3)	4656(183.3)	4681(184.3)	4681(184.3)
	4.35	Turning radius	mm(in)	Wa	2620(103.1)	2620(103.1)	2645(104.1)	2645(104.1)
	4.36	Internal turning radius	mm(in)	b13	877(34.5)	879(34.6)	879(34.6)	879(34.6)
Performance	5.1	Travel speed, loaded / unloaded	km/h(mph)		15 / 16 (9.3 / 9.9)	15 / 16 (9.3 / 9.9)	15 / 16 (9.3 / 9.9)	15 / 16 (9.3 / 9.9)
	5.2	Lift speed, loaded / unloaded	mm/s(fpm)		350 / 470 (68.9 / 92.5)	330 / 470 (65.0 / 92.5)	310 / 470 (61.0 / 92.5)	310 / 470 (61.0 / 92.5)
	5.3	Lowering speed, loaded / unloaded	mm/s(fpm)		480 / 450 (94.5 / 88.6)	480 / 450 (94.5 / 88.6)	480 / 450 (94.5 / 88.6)	480 / 450 (94.5 / 88.6)
	5.6	Maximum drawbar pull, loaded / unloaded, 5 minute rating	N(lb)		18620 / 18620 (4186 / 4186)	18620 / 18620 (4186 / 4186)	18620 / 18620 (4186 / 4186)	18620 / 18620 (4186 / 4186)
	5.8	Maximum gradeability, loaded / unloaded, 5 minute rating	%(deg)		17 / 27 (9.6 / 15.1)	16 / 26 (9.1 / 14.6)	15 / 25 (8.5 / 14.0)	15 / 25 (8.5 / 14.0)
	5.10	Service brake			FOOT / HYD	FOOT / HYD	FOOT / HYD	FOOT / HYD
		Parking brake	STANDARD / OPTIONAL		HAND-MECH / AUTO-ELECTRIC	HAND-MECH / AUTO-ELECTRIC	HAND-MECH / AUTO-ELECTRIC	HAND-MECH / AUTO-ELECTRIC
Electric	6.1	Drive motor rating S2 60 minute	kW(hp)		10(13) X 2	10(13) X 2	10(13) X 2	10(13) X 2
	6.2	Lifting motor rating at S3 15%	kW(hp)		28(38)	28(38)	28(38)	28(38)
	6.3	Battery as per DIN 43531 /35/36 A, B, C, no			DIN43536A	DIN43536A	DIN43536A	DIN43536A
	6.4	Battery voltage/nominal capacity K5	V/Ah		80 / 720	80 / 720	80 / 720	80 / 720
	6.5	Battery weight (min)	kg(lb)		2160(4762)	2160(4762)	2160(4762)	2160(4762)
		Battery compartment* L/W/H	mm(in)		1007 / 1040 / 840 (39.6 / 40.9 / 33.1)	1007 / 1040 / 840 (39.6 / 40.9 / 33.1)	1007 / 1040 / 840 (39.6 / 40.9 / 33.1)	1007 / 1040 / 840 (39.6 / 40.9 / 33.1)
Others	8.1	Type of drive control unit			Inverter AC	Inverter AC	Inverter AC	Inverter AC
	8.2	Working press for attachments	bar(psi)	System	190(2756)	210(3046)	230(3336)	230(3336)
				Attachment	155(2248)	155(2248)	155(2248)	155(2248)
	8.4	Sound level at the driver's ear according to EN 12 053	dB (A)		70	70	70	70

Dimensional Drawing

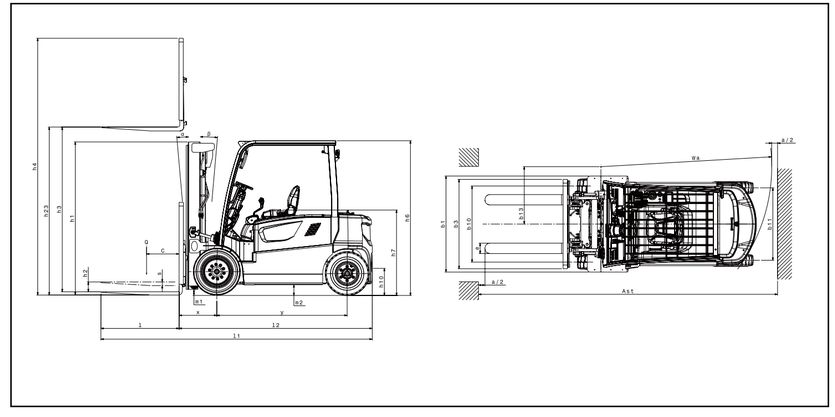

*Please refer to the technical bulletin and contact your Doosan representative for more detail information of battery size.
This specification sheet to VDI guideline 2198 only gives the technical figures for the standard truck.
Different tires, other masts, additional equipment etc. could give different figures.

Doosan Industrial Vehicle
Web site : www.doosan-iv.com