Bobcat

One Tough Animal.

BATTERY FORKLIFTS

2.0 to 3.5 ton capacity 4wheel B20NS / B25NS / B30NS / B35NS



ONE TOUGH ANIMAL

OUR MISSION

We empower operators to accomplish more, while working in the toughest conditions and tightest situations. When our customers have the will, we provide the way.



INTRODUCTION

BOBCAT'S HISTORY

In 1958, Melroe Manufacturing Company introduced a compact front-end loader that evolved quickly into the M400, the world's first true skid steer loader. The company soon adopted what became the world-famous 'Bobcat' brand – and its success paved the way for the global compact equipment industry we know today.

YEARS OF EXPERIENCE

In 2021, Bobcat expanded its portfolio by acquiring Bobcat Industrial Vehicle. This specialist in material handling equipment constructed its first forklift in 1968 and went on to establish a global presence with 400 dealers in 93 countries.



BOBCAT TODAY

Bobcat is expanding its portfolio with the addition of forklifts and reach trucks for the material handling industry. Offering a comprehensive line-up that will meet all your intralogistics needs. Bobcat forklifts and reach trucks are produced in our factory in Korea and China, while our premium quality warehouse equipment is made in Germany.



EXPERIENCE THE FULLY ENHANCED VALUE OF NXE SERIES

FAR BEYOND THE EXPECTATION,

Bobcat's new BNS series electric forklifts are equipped with various ergonomic design and safety features based on the outstanding performance and durability. It delivers optimal productivity and operator convenience.







HIGH PERFORMANCE WITH OUTSTANDING DURABILITY

Performance is maximized by combining advanced design and the latest technology.
Highly durable main components improve uptime and maintenance cost. P 6–7



EXCELLENT OPERATOR COMFORT

The various convenience features are equipped as standard, providing more comfortable
working environment with less fatigue.
P 8–9



ENHANCED SAFETY

Various safety features prevent unexpected safety accidents and protect operator.

P 10–11



MAXIMUM UPTIME


The robust components ensure durability and reliability. All primary components are easily accessible, making maintenance simple and efficient.

P 13

HIGH PERFORMANCE WITH OUTSTANDING DURABILITY

ADVANCED DURABILITY FOR YOU AND YOUR OPERATION

The combination of highly-efficient Curtis AC controller, high-performance motor and drive axle maximizes the performance, delivering the highest productivity in various applications.

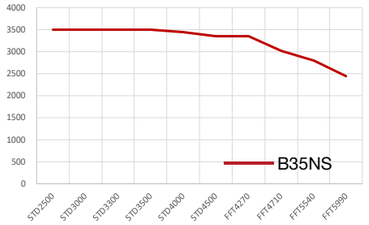

HIGH RESIDUAL CAPACITY

Various line-up from 2.0ton to 3.5ton.
By increasing the stability, it provides high residual capacity even at a height of 4m.
The system voltage of 3.0t/3.5t model is 80V, allowing more powerful operation when handling heavy loads.
B25NS: 2.1 ton capacity at 4.7m height.
B35NS: 3.0 t capacity at 4.7m height.

E-MOTOR FOOT BRAKE (EFB,STANDARD TRIM)




The EFB activates braking by controlling the motor electrically instead of the conventional hydraulic brake.
It brings less pedal force and ankle fatigue of operator.
The simple brake structure makes it less troublesome and reduces maintenance costs.

RELIABLE AC CONTROLLER




Curtis AC controller controls driving/ hydraulic operation, resulting in optimum power and performance.
IP67 rated water & dust proof feature protects against water even it is sink in depth of 1m underwater.

RELIABLE PERFORMANCE BY COMBINING ROBUST SINGLE DRIVE AXLE AND LOW NOISE/DURABLE MOTOR

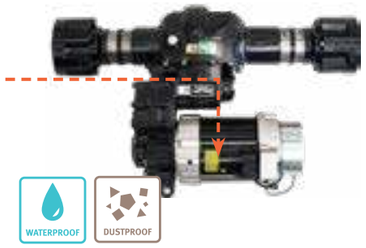

Powerful single drive axle transmits power and torque of motor efficiently.
IP54 rated durable AC motor protects motor and its components against liquid from any direction even in the rain.

HYDRAULIC SHOE BRAKE

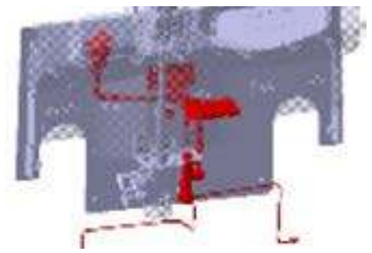

Generates great braking force
Precise control operation possible
Greater braking effort than EFB
Brake fluid management required.

TILT CYLINDER BOOTS (OPT)



Prevent inflow of water and corrosion of the tilt cylinder rod.

STABILITY OPTIMIZED



By applying the H-type axle, the overall layout is optimized and center of gravity is lowered.
It enhances stability so that heavy cargo can be handled stably.

EXCELLENT OPERATOR COMFORT

EXCELLENT FRONT VISIBILITY

Optimized layout of mast chains & structures provides excellent front visibility.
Front cowl height is lowered to reduce blind spots.
The over head guard thickness and layout are optimized for wide visibility.

Compact steering wheel
Compact steering wheel offers steering convenience and reduces operator fatigue.

Full color display
The full color display has good visibility even in the outside and can grasp the various status of the forklift easily.

LARGE ENTRY GRIP BAR AND ANTI-SKID STEP PLATE



The size of entry grip bar & step plate are enlarged. It helps safer get on/off.

ERGONOMICALLY DESIGNED HYDRAULIC LEVERS WITH FORWARD AND BACKWARD SWITCH



Forward and backward switch is located on the hydraulic lever, enables more convenient switching direction with less movement.

DUAL BATTERY CONNECTOR



Dual battery connector maximizes convenience of charging.
Charger can be connected directly without disconnecting the battery connector.

VARIOUS CONVENIENCE FEATURES



5V USB power / Document clip
Cup holder / Storage box

MAST LOWERING CUSHION



The hydraulic cushion minimizes the impact by reducing the lowering speed at the end.
*2-Stage mast only.

LED LIGHT



Bright, long-lasting LED light equipped as standard provides brighter visibility.

ERGONOMIC OPERATOR COMPARTMENT

Thanks to spacious leg room, operator works at comfortable posture during the long hours of working.
Get on/off in a easy and safe way by lowering the height of step & floor plate



ENHANCED SAFETY

GSS
Guardian Stability System

GSS (GUARDIAN STABILITY SYSTEM, BASIC)
Automatic speed control
Seatbelt interlock
Anti roll back / Unlimited ramp hold with electronic parking brake
ISO3691 Hyd. locking valve
Operator sensing system
Low battery warning alarm
Turtle mode

GSS PLUS (GUARDIAN STABILITY SYSTEM, OPTIONAL)
Decrease of travel speed (up to 50%) when the mast is raised above the primary stage.
Forward tilt is restricted by 2 degrees when the mast is raised above the primary stage.
Alarm sounds when the mast is raised above the primary stage with the mast tilted more than 2 degrees.




ANTI ROLL BACK
The controller prevents the forklift from rolling back for 5 seconds when the truck is stopped on a slope.



SEATBELT INTERLOCK
If the seat belt is not fastened, driving and mast operation are restricted to prevent safety accidents.



AUTOMATIC SPEED CONTROL
It automatically reduces the travel speed when cornering, reducing the risk of accidents or damage.

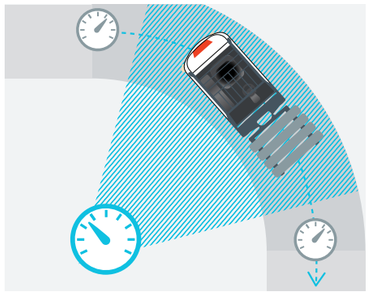


SAFETY LIGHT (OPTION)
Warning is given to pedestrians by reflecting the blue light.



FENCE LIGHT (OPTION)
Warning is given to pedestrians by reflecting red lines around the vehicle.



ISO3691 HYD. LOCKING VALVE
If operator leaves or turns-off the truck, this system will automatically lock the hydraulic function, not allowing lifting, tilting, lowering.

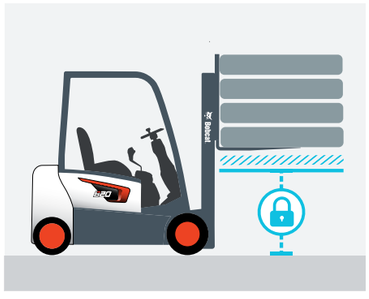

ELECTRONIC PARKING BRAKE (EPB)
The parking brake is activated automatically after 3 seconds of stopping to prevent accidents.
The electronic parking brake (EPB) prevents the forklift from rolling back if the truck is stopped on a slope.



OSS(OPERATOR SENSING SYSTEM)
OSS function avoids any unintended truck movements when the operator is not seated.
Warning when operator leaves the seat without parking brake.
Warning when operator drives without seatbelt fastened.
Automatically stop the vehicle when operator leaves the seat.



BUILT TO LAST

EXCELLENT RELIABILITY

Bobcat electric forklifts are built tough to provide maximum uptime and dependability thanks to a reliable AC controller, dust & water-resistant parts, and an additional drive motor cover.

BATTERY SIDE EXTRACT (OPTION)



Side lift in-out: The battery can be replaced by using another forklift from the side.
Side Roll in-out: Rollers are installed on the frame, so battery can be replaced easily with less force.

FINGERTIP CONTROL (OPTION)



The ergonomically designed fingertip controller enables precise and delicate control in a comfortable position, reducing fatigue and improving productivity.

WEIGHT SCALE (OPTION)



The weight of the cargo can be easily measured by hydraulic type weight scale sensor.
The measured weight is displayed on the additional display.

AUTO TILT LEVELING (OPTION)



With the auto tilt function, mast can be moved in a vertical position easily during the forward tilting.

COLD STORAGE (OPTION)



Cold storage option can be equipped along with the working condition.
It is possible to work at -20°C environment.

MONO PEDAL (OPTION)



Forward and backward switch function is integrated into the accelerator pedal for quicker and easier forward and backward operation.

THERE'S NO TIME FOR DOWNTIME. STAND UP TO EVERY TASK THAT COMES YOUR WAY. DAY AFTER DAY.

LI-ION BATTERY (OPTION)

Li-ion is the most advanced technology of battery. It has fast charging speed and nearly 4 times longer life cycle than lead-acid battery.
It can be recharged quickly during the break time, truck can be operated for a long time, so there is no need to replace the spare battery.
No harmful gas is emitted during charging and discharging. It makes cleaner and healthier work place.
No need to add distilled water or electrolytes. It reduces maintenance cost in the long term.
We provide 5-year or 2,500-cycle warranty.



Easyview
To examine the forklift and set the program with notebook only (without a special tool)





Junction Box
Fuse, CAN port are placed in a spot for quicker access and maintenance.



Hood Locking Cylinder
It helps easy maintenance and prevents safety accident.

Removable Side Cover
By applying knob bolt, Side & rear covers can be disassembled by hand.

SPECIFICATIONS

TECHNICAL DATA ACCORDING TO VDI 2198							
CHARACTERISTICS	1.1	Manufacturer			Bobcat	Bobcat	Bobcat	Bobcat
	1.2	Manufacturer's type designation			B20NS(Shoe)	B25NS(Shoe)	B30NS(Shoe)	B35NS(Shoe)
	1.3	Drive : electric(battery or mains) ,diesel, petrol ,fuel gas, manual			Electric	Electric	Electric	Electric
	1.4	Operator type : hand, pedestrian, standing, seated, order-picker			Seated	Seated	Seated	Seated
	1.5	Load capacity/rated load kg(lb)	kg	Q	2000	2500	3000	3500
	1.6	Load centre distance	mm	c	500	500	500	500
	1.7	Load distance, centre of drive axle to fork	mm	x	457	457	457	462
	1.8	Wheelbase	mm	y	1560	1560	1710	1710
WEIGHTS	2.1	Service weight (with min. weight of battery)	kg		3810(3910)	4150(4250)	4746(4846)	5230(5330)
	2.2	Axle loading, loaded front/rear	kg		5190/620	5979/671	6885/861	7760/970
	2.3	Axle loading, unloaded front/rear	kg		1658/2152	1830/2320	2206/2540	2288/2942
WHEELS & TYRES	3.1	Tires: pneumatic (P), superelastic (SE), cushion (C) SE			P / SE	P / SE	P / SE	SE
	3.2	Tire size, front			23X9-10	23X9-10	23x10-12	23x10-12
	3.3	Tire size, rear			18x7-8	18x7-8	18x7-8	18x7-8
	3.4	Wheels, number front/rear (x=driven wheels)			2x/2	2x/2	2x/2	2x/2
	3.5	Tread width, front	mm	b10	1019	1019	1014	1014
	3.6	Tread width, rear	mm	b11	995	995	995	995
BASIC DIMENSIONS	4.1	Tilt of mast/fork carriage forward (α)/backward(β)	deg	α / β	6 / 10	6 / 10	6 / 10	6 / 10
	4.2	Height, mast lowered	mm	h1	2045	2045	2045	2045
	4.3	Free lift	mm	h2	150	150	150	150
	4.4	Lift (with STD 2-stage mast)	mm	h3	3000	3000	3000	3000
	4.5	Height, mast extended	mm	h4	4247	4247	4247	4252
	4.6	Height to top of overhead guard	mm	h6	2180	2180	2180	2180
	4.7	Seat height/stand height	mm	h7	1183	1183	1183	1183
	4.8	Towing coupling height	mm	h10	360	360	360	360
	4.9	Overall length	mm	l1	3360	3400	3570	3600
	4.10	Length to face of forks	mm	l2	2310	2350	2520	2550
	4.11	Overall width	mm	b1	1244	1244	1244	1244
	4.12	Fork dimensions	mm	s / e / l	45/100/1050	45/100/1050	45/122/1050	50/122/1050
	4.13	Fork carriage ISO 2328. Class/type A, B			II	II	III	III
	4.14	Fork carriage width	mm	b3	1102	1102	1116	1116
	4.14a	Fork Spacing (min/max)	mm		250/1032	250/1032	272/1104	272/1104
	4.15	Ground clearance, with load, below mast	mm	m1	140	140	140	140
	4.16	Ground clearance, centre of wheelbase	mm	m2	125	125	125	125
	4.17	Aisle width for pallets 1000 x 1200 crossways	mm	Ast	3697	3717	3957	3962
	4.18	Aisle width for pallets 800 x 1200 lengthways	mm	Ast	3897	3917	4157	4162
	4.19	Turning radius	mm	Wa	2040	2060	2300	2300
	4.20	Internal turning radius	mm	b13	650	650	677	677
PERFORMANCE	5.1	Travel speed, loaded / unloaded	km/h		14/15	14/15	14/15	14/15
	5.2	Lift speed, loaded / unloaded	mm/s		320/450	300/450	280/400	250/400
	5.3	Lowering speed, loaded / unloaded	mm/s		500/460	500/460	380/365	380/365
	5.4	Maximum drawbar pull, loaded / unloaded, 5 minute rating	N		10910 / 10500	10910 / 10700	14460 / 13560	14460 / 13860
	5.5	Maximum gradeability, loaded / unloaded, 5 minute rating	%		15 / 27	15 /25	15 / 27	15 / 25
	5.6	Service brake	Entry/Standard		Mechanical (Shoe) / Electric			
	5.7	Parking brake	Entry/Standard		Mechanical / EPB(Electronic parking brake)			
ELECTRIC	6.1	Drive motor rating S2 60 minute	kW	Entry/Standard	11/9	11/9	16.6/12	16.6/12
	6.2	Lifting motor rating at S3 15%	kW	Entry/Standard	12/14	12/14	13.5/16	13.5/16
	6.3	Battery type			Lead-acid	Lead-acid	Lead-acid	Lead-acid
	6.4	Battery voltage/nominal capacity K	V/Ah		48/600	48/600	80/420	80/480
	6.5	Battery weight	kg		1000	1000	1582	1582
	6.6	Battery Compartment L/W/H	mm		570x1028x755	570x1028x755	710x1028x745	710x1028x745
OTHERS	7.1	Type of drive control unit			AC	AC	AC	AC
	7.2	Working press for attachments	bar	System	200	200	200	200
				Attachment	200	200	200	200
	7.3	Sound level at the driver's ear according to EN 12 053	dB (A)		68	68	68	68

*Please refer to the technical bulletin and contact your Bobcat representative for more detail information of battery size.
This specification sheet to VDI guideline 2198 only gives the technical figures for the standard truck. Different tires, other masts, additional equipment etc. could give different figures.

STANDARD EQUIPMENT & OPTIONS

STANDARD FEATURES AND OPTIONAL EXTRAS		
CHASSIS	ENTRY TRIM (E)	STANDARD TRIM (S)
Line up	2.0T / 2.5T / 3.0T / 3.5T	
System voltage	2.0/2.5T : 48V, 3.0/3.5T : 80V	
Controller	IP67 Curtis AC controller	
Drive/HYD motor	IP54 AC Motor	
Service brake	Mechanical (Shoe)	Electric
Parking brake	Mechanical	Electric

CONTROL VALVE	E	S
Lever type, Deck mounted	✓	-
Lever type, Deck mounted, ISO3691	•	-
Lever type, Deck mounted, F/R switch, ISO3691	-	✓
Fingertip, ISO3691	-	•

SEAT	E	S
Basic - Static/Suspension	(1)	(2)
Deluxe(Sears) - Static/Suspension	•	•
Premium(Grammer)	-	•

LIGHT	E	S
Font light -LED	✓	✓
Font light -LED with combi lamp	•	•
Rear light - LED	•	•
Strobe light	•	•

CONVENIENCE	E	S
Ergonomic operator compartment	✓	✓
Large entry grip bar	✓	✓
Tilting steering column	✓	✓
USB power socket	✓	✓
Document clip/Cup holder/Storage box	✓	✓
Compact steering wheel	✓	✓
Display	(3)	(4)
NFC Tag Start	•	•

* Remark : This list is based on factory data. Standard or optional can vary for specific countries.

STANDARD FEATURES AND OPTIONAL EXTRAS		
PRODUCTIVITY	E	S
Dual battery connector	•	✓
SLIO(Side lift in-out)	•	•
SRIO(Side battery roll in-out)	•	•
Auto tilt leveling	•	•
Weight scale	•	•
Mono pedal	•	•
Li-ion battery	•	•


SERVICEABILITY	E	S
Hood -locking type	✓	✓
Toolless side cover	✓	✓


DURABILITY	E	S
Tilt cylinder boots	•	•
Under cover	•	•

SAFETY	E	S
GSS system (Basic)	✓	✓
- Cornering speed control	✓	✓
- Seatbelt interlock	✓	✓
- OSS (Operator sensing system)	✓	✓
- Anti roll back / Unlimited ramp hold	✓	✓
- Turtle mode	✓	✓
- Low battery warning alarm	✓	✓
Rear grip bar with horn	•	•
Rear view mirror (Side / Panoramic)	•	•
Front steel mesh guard	•	•
Safety light - Front / Rear	•	•
Fence light - Around	•	•
Mast lift speed control	•	•
GSS PLUS system (Optional)	•	•

• = option
✓ = standard
– = not available

(1) Static
(2) Suspension
(3) Mono color
(4) Full color

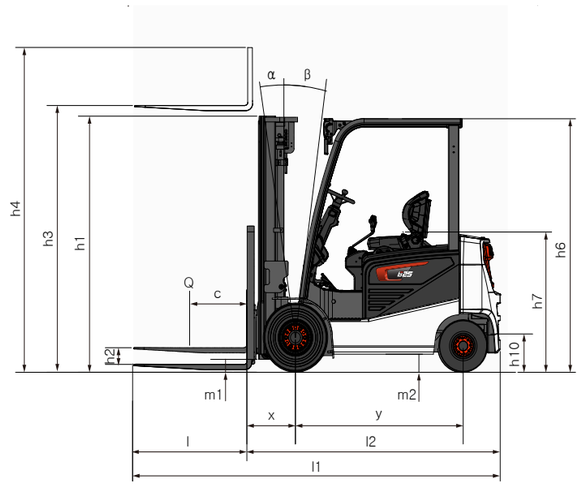

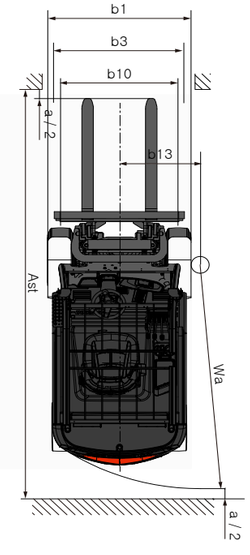

MAST SPECIFICATION AND RATED CAPACITIES

Model	Mast Type	Max. Fork Height	Mast Lowered Height	Extended Height		Free lift		Pneumatic Tire			Solid Soft Tire		
				w/ Load Backrest	w/o Load Backrest	w/ Load Backrest	w/o Load Backrest	Tile Angle		Load Capacity	Tile Angle		Load Capacity
								Fwd	Bwd	LC 500mm	Fwd	Bwd	LC 500mm
		mm	mm	mm	mm	mm	mm	deg	deg	kg	deg	deg	kg
B20NS	STD	3000	2045	4247	3790	150	150	6	10	2000	6	10	2000
		3300	2195	4547	4090	150	150	6	10	2000	6	10	2000
		3500	2295	4747	4290	150	150	6	10	2000	6	10	2000
		4000	2595	5347	4890	150	150	6	6	2000	6	6	2000
		4500	2845	5847	5390	150	150	6	6	1900	6	6	1950
		5000	3095	6347	5890	150	150	6	6	1700	6	6	1800
	FFL	2930	2015	4194	3737	810	1345	6	10	2000	6	10	2000
		3210	2155	4474	4017	950	1485	6	10	2000	6	10	2000
		3580	2205	4849	4392	1000	1535	6	10	1900	6	10	1920
	FFT	3880	1880	5149	4692	675	1210	6	6	1800	6	6	1850
		4270	2005	5554	5097	800	1335	6	6	1780	6	6	1790
		4710	2145	5974	5517	940	1475	6	6	1720	6	6	1730
		5540	2495	6799	6342	1290	1825	6	6	1510	6	6	1550
		6010	2645	7249	6792	1440	1975	6	6	1100	6	6	1450
B25NS	STD	3000	2045	4247	3790	150	150	6	10	2500	6	10	2500
		3300	2195	4547	4090	150	150	6	10	2500	6	10	2500
		3500	2295	4747	4290	150	150	6	10	2500	6	10	2500
		4000	2595	5347	4890	150	150	6	6	2450	6	6	2500
		4500	2845	5847	5390	150	150	6	6	2200	6	6	2250
		5000	3095	6347	5890	150	150	6	6	1950	6	6	2050
	FFL	2930	2015	4194	3737	810	1345	6	10	2500	6	10	2500
		3210	2155	4474	4017	950	1485	6	10	2500	6	10	2500
		3580	2205	4849	4392	1000	1535	6	10	2450	6	10	2450
	FFT	3880	1880	5149	4692	675	1210	6	6	2250	6	6	2310
		4270	2005	5554	5097	800	1335	6	6	2200	6	6	2280
		4710	2145	5974	5517	940	1475	6	6	2100	6	6	2150
		5540	2495	6799	6342	1290	1825	6	6	1800	6	6	1900
		6010	2645	7249	6792	1440	1975	6	6	1250	6	6	1750
B30NS	STD	3000	2045	4247	3790	150	150	6	10	3000	6	10	3000
		3300	2195	4547	4090	150	150	6	10	3000	6	10	3000
		3500	2295	4747	4290	150	150	6	10	3000	6	10	3000
		4000	2595	5347	4890	150	150	6	6	2900	6	6	2950
		4500	2845	5847	5390	150	150	6	4	2750	6	4	2800
		5000	3095	6347	5890	150	150	6	4	2300	6	4	2500
	FFL	2930	2015	4194	3737	810	1345	6	10	3000	6	10	3000
		3210	2155	4474	4017	950	1485	6	10	3000	6	10	3000
		3580	2205	4849	4392	1000	1535	6	10	3000	6	10	3000
	FFT	3880	1880	5149	4692	675	1210	6	6	2800	6	6	2850
		4270	2005	5554	5097	800	1335	6	6	2700	6	6	2750
		4710	2145	5974	5517	940	1475	6	4	2600	6	4	2650
		5540	2495	6799	6342	1290	1825	6	4	2100	6	4	2400
		6010	2645	7249	6792	1440	1975	6	4	1500	6	4	2200
B35NS	STD	3000	2045	4252	3795	150	150	6	10	-	6	10	3500
		3300	2195	4552	4095	150	150	6	10	-	6	10	3500
		3500	2295	4752	4295	150	150	6	10	-	6	10	3500
		4000	2595	5352	4895	150	150	6	6	-	6	6	3450
		4500	2845	5852	5395	150	150	6	4	-	6	4	3350
		5000	3095	6352	5895	150	150	6	4	-	6	4	2850
	FFL	2930	2015	4199	3742	810	1345	6	10	-	6	10	3500
		3210	2155	4479	4022	950	1485	6	10	-	6	10	3500
		3580	2205	4854	4397	1000	1535	6	10	-	6	10	3500
	FFT	3880	1880	5154	4697	675	1210	6	6	-	6	6	3400
		4270	2005	5559	5102	800	1335	6	6	-	6	6	3350
		4710	2145	5979	5522	940	1475	6	4	-	6	4	3020
		5540	2495	6804	6347	1290	1825	6	4	-	6	4	2800
		6010	2645	7254	6797	1440	1975	6	4	-	6	4	2450

Note: Mast Specifications & Rated capacities are based on standard chassis without side shifter.
Products and specifications are subject to improvement and change without prior notices.

Bobcat

DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2023 Bobcat Company. All Rights Reserved.

Doosan Bobcat Korea Co., Ltd.

www.bobcat.com

©2023 BOBCAT