Bobcat

One Tough Animal.

DIESEL FORKLIFTS

Diesel 2.0 to 3.5 ton Capacity, EURO Stage IIIA D20NXP / D25NXP / D30NXP / D33NXP / D35NXP



ONE TOUGH ANIMAL

OUR MISSION

We empower operators to accomplish more, while working in the toughest conditions and tightest situations. When our customers have the will, we provide the way.

INTRODUCTION



BOBCAT'S HISTORY

In 1958, Melroe Manufacturing Company introduced a compact front-end loader that evolved quickly into the M400, the world's first true skid steer loader. The company soon adopted what became the world-famous 'Bobcat' brand – and its success paved the way for the global compact equipment industry we know today.

YEARS OF EXPERIENCE

In 2021, Bobcat expanded its portfolio by acquiring Bobcat Industrial Vehicle. This specialist in material handling equipment constructed its first forklift in 1968 and went on to establish a global presence with 400 dealers in 93 countries.



BOBCAT TODAY

Bobcat is expanding its portfolio with the addition of forklifts and reach trucks for the material handling industry. Offering a comprehensive line-up that will meet all your intralogistics needs. Bobcat forklifts and reach trucks are produced in our factory in Korea and China, while our premium quality warehouse equipment is made in Germany.



EXPERIENCE THE FULLY ENHANCED VALUE OF NXP SERIES

EVERYTHING HAS BEEN CHANGED. NEW NXP, THE GAME CHANGER.

The new NXP series offering outstanding power, durability and operator comfort realizes customer satisfaction through providing the best productivity and convenience in various industrial applications.







STYLISH DESIGN

By applying the Bobcat new design, it represents the Bobcat's unique exterior.



POWERFUL PERFORMANCE

The combination of powerful engine, transmission, and drive axle maximizes the performance and gives best productivity in various work applications.

P 6–7



ALL-DAY COMFORT

The operator compartment is more spacious and ergonomically designed to reduce driver's fatigue. It enables more comfort and safe operation.

P 10–11



MAXIMUM UPTIME


The robust components ensure durability and reliability. All primary components are easily accessible, making maintenance simple and efficient.

P 13

POWERFUL PERFORMANCE



D25NXP
Yanmar Diesel Engine
4TNE98(3.3L)
4TNE94L(3.0L)

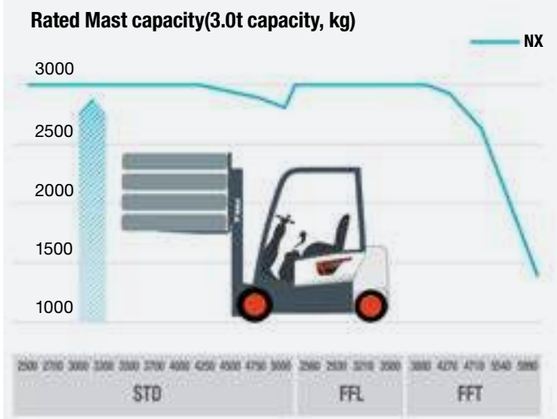


ENGINE

Yanmar 3.0L / 3.3L Diesel engine makes powerful performance and generating capacity by the technology of key temperature control.
It also increase the Ash cleaning and Engine Oil change interval, so give the value to customer TCO optimization.
It is complied with Euro Stage IIIA or EPA Tier-3.

HIGH RESIDUAL CAPACITY

NXP can lift about 10% more weight at the same height with the aux weight structure and powerful hydraulic system.
(* Single pneumatic tire truck)
It is suitable for work areas with high rack height.

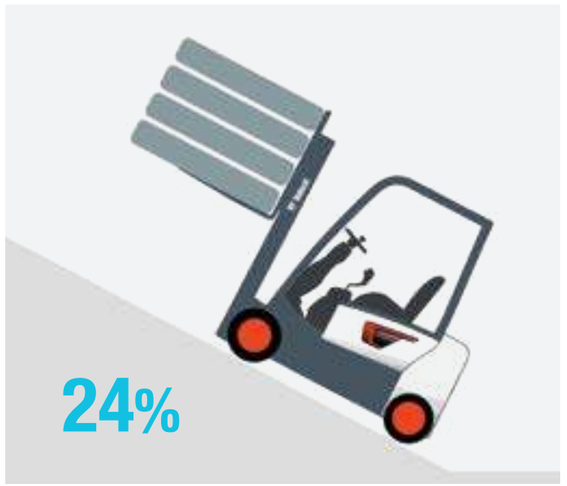

POWERFUL GRADEABILITY

With the powerful engine, transaxle and aux weight structure, gradeability is maximized and makes it easy to go up the 24% steep slopes.
[Max Gradeability @1.6km/h, Laden]
D30NXP 3.0t capacity truck
- Stage IIIA : 24%



HIGH SPEED OF LIFTING / LOWERING

Gear pump and mast regulator valve are optimized to increase the lifting / lowering speed and it makes operation more productive.

AUX WEIGHT

The new aux-weight structure increases the stability of vehicle. The lowered center of gravity enhances lifting capacity at high height racking and gradeability.

DURABILITY GUARANTEED

ADVANCED DESIGN FOR YOU AND YOUR OPERATION


The NXP Series is equipped with advanced design to reduce noise, vibration, heat, dust - inflow, ensures durability of major components.
With the improved design and additional option,
NXP guarantees durability in harsh operating conditions.

AUX WEIGHT



Many troubles are caused by vibration. In NX series, the engine is mounted on the Aux. weights to effectively absorb vibration and suppress noise. It extends parts durability and prevents durability decline and oil leakage.

OPTIMIZED AIR FLOW

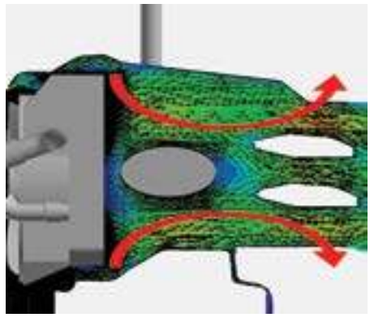

Air flow is optimized by improving muffler position, clearance between parts and enlarging the inner space of counter weight.
It streamlines the air flow and increases the cooling performance.

ROBUST MAST



Reinforcement rib (J channel) of mast beam improves mast stiffness and lateral stability.
Six roller carriage gives superior strength and durability for wider and longer loads.

ANTI DUST DESIGN



The bottom-sealed overhead guard absolutely eliminates the dust inflow from the bottom side.

DUAL ELEMENTS AIR CLEANE



Air cleaner with dual element filter protects engine against dust effectively, ensuring the durability of engine.
It is equipped as standard in NX Plus model.


PRE CLEANER (OPTION)



In a dusty environment, pre-cleaner removes dust in advance and extends lifecycle of air cleaner effectively.

EXCELLENT OPERATOR COMFORT



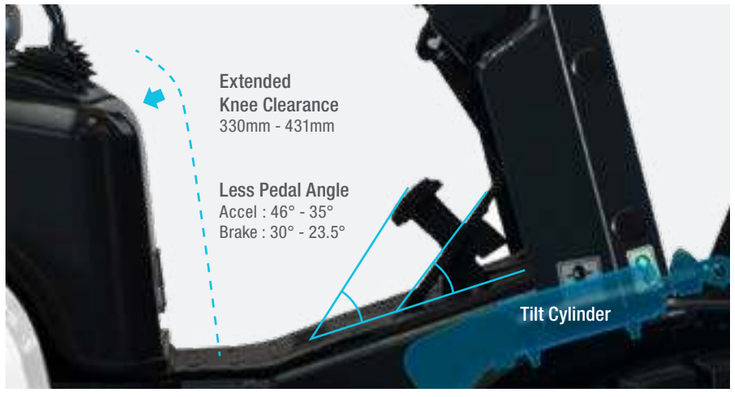

MORE SPACIOUS LEG ROOM

The knee clearance is widened and tilt cylinder is removed on the floor plate, it allows more spacious leg room.
Accel and brake pedal clearance and angle are improved to reduce ankle fatigue.

IMPROVED FRONT / REAR VISIBILITY




The improvement of FCU column height and counter weight design has increased front and rear visibility and enables safer driving.

WIDE MAST VISIBILITY




Neatly arranged hoses and chains provide wide visibility.

STEERING COLUMN & INSTRUMENT PANEL OFFSET

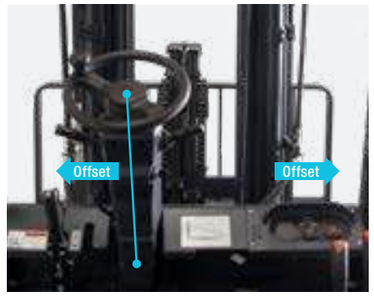

Steering column is shifted to the left for more comfortable posture.
Instrument panel is also shifted o the right for easier viewing.

ADJUSTABLE TILT STEERING COLUMN

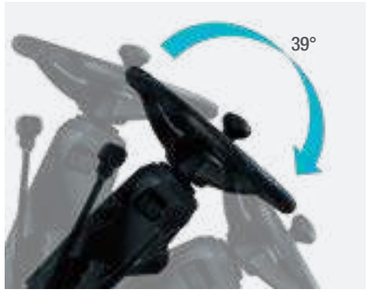

The steering column can be adjusted over a wide range of angles, allowing optimal posture for operator.

COMPACT STEERING WHEEL



Compact steering wheel offers steering convenience and reduces operator fatigue.

INTEGRATED LAMP SWITCH



The turn signal and head lamp switches are integrated for convenient operation.

LED LAMP



Long-lasting, high-brightness LED lights is equipped as standard feature.

PANORAMIC MIRROR



The panoramic mirror offers wide rear view and greatly improves driving safety.

EXTENDED STEERING ANGLE



Turning radius is improved by increasing the steering angle.
It brings more maneuverability in small space.

BUILT TO LAST

ENHANCED SAFETY
NXP helps safer operation. NXP is equipped with various safety features.
It prevents unexpected accidents, ensuring safety of employees.

Large Entry Grip Bar
The entry grip bar is larger, so it is easy to grip and allows safer ride on / off.

Rearranging of Tilt Cylinder
Tilt cylinder is removed on the floor plate, preventing operator from falling over.

Anti-Skid Step Plate
The wider step plate prevents slipping and it also helps safer ride on / off.





OSS (OPERATOR SENSING SYSTEM)
OSS function avoids any unintended truck movements when the operator is not seated.

1. Warning when operator leaves the seat without parking brake.
2. Warning when operator drives without seatbelt fastened.
3. Automatically stop the vehicle when operator leaves the seat.



ISO3691 HYD. LOCKING VALVE
If operator leaves or turns-off the truck, this system will automatically lock the hydraulic function, not allowing lifting, tilting, lowering.

THERE'S NO TIME FOR DOWNTIME. STAND UP TO EVERY TASK THAT COMES YOUR WAY. DAY AFTER DAY.

JUNCTION BOX
Fuse and relay are concentrated for easy maintenance.



Wide Open Hood Angle
It is easy to access engine room by enlarging the hood open angle.

Hood Locking Cylinder
It helps easy maintenance and prevents safety accident.

Removable Side Cover
By applying knob bolt, it can be disassembled by hand.



TECHNICAL SPECIFICATIONS

D20/25/30/33/35NXP - COMPLIED WITH EURO STAGE IIIA OR EPA TIER III									
CHARACTERISTICS	1.1	Manufacturer			Bobcat	Bobcat	Bobcat	Bobcat	Bobcat
	1.2	Model designation			D20NXP	D25NXP	D30NXP	D33NXP	D35NXP
	1.3	Transmission type			Autoshift	Autoshift	Autoshift	Autoshift	Autoshift
	1.4	Fuel : Diesel LPG DF			Diesel	Diesel	Diesel	Diesel	Diesel
	1.5	Operator type : Hand Pedestrain Standing Seated Order-picker			Seated	Seated	Seated	Seated	Seated
	1.6	Load capacity		kg	2000	2500	3000	3300	3500
	1.7	Load Center		mm	500	500	500	500	500
	1.8	Load distance centre of drive axle to fork	x	mm	467	467	472	477	477
	1.9	Wheelbase	y	mm	1700	1700	1700	1700	1700
TYRES	2.1	Service weight (with min. weight of battery)		kg	3635	3920	4385	4585	4685
	2.2	Axle Loading Laden Front/Rear		kg	4925/710	5560/860	6475/910	6935/950	7205/980
	2.3	Axle Loading Unladen Front/Rear		kg	1705/1930	1720/2200	1785/2600	1720/2865	1650/3035
	2.4	Tyres: pneumatic (P) superelastic (SE) cushion (C)			P	P	P	P	P
	2.5	Tyre size Front			28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR
	2.6	Tyre size Rear			6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	2.7	Wheels number Front/Rear (x = driven wheels)			x2/2	x2/2	x2/2	x2/2	x2/2
	2.8	Tread Front	b11	mm	1060	1060	1060	1060	1060
	2.9	Tread Rear	b12	mm	980	980	980	980	980
DIMENSIONS	3.1	Tilt of Mast/Fork carriage Forward/Backward	α / β	deg	6/10	6/10	6/10	6/10	6/10
	3.2	Height Mast lowered	h1	mm	2045	2045	2045	2045	2045
	3.3	Free lift	h2	mm	150	150	150	150	150
	3.4	Lift (with STD 2-stage mast)	h3	mm	3000	3000	3000	3000	3000
	3.5	Height Mast Extended	h4	mm	4247	4247	4247	4252	4252
	3.6	Height of Overhead Guard(Cabin)	h6	mm	2160	2160	2160	2160	2160
	3.7	Height of Seat	h7	mm	1185	1185	1185	1185	1185
	3.8	Overall Length	l1	mm	3610	3660	3715	3780	3800
	3.9	Length to Forkface	l2	mm	2560	2610	2665	2730	2750
	3.10	Overall Width	b1/b2	mm	1290	1290	1290	1290	1290
	3.11	Fork dimensions	s/e/l	mm	45x100x1050	45x100x1050	45x122x1050	50x125x1050	50x125x1050
	3.12	Fork carriage ISO 2328 class/type AB			II	II	III	III	III
	3.13	Fork carriage width	b3	mm	1042	1042	1042	1042	1042
	3.14	Ground Clearance laden below mast	m1	mm	132	132	132	132	132
	3.15	Ground Clearance center of wheelbase	m2	mm	135	135	135	135	135
	3.16	Aisle with for pallets 1000 x 1200 crossways	Ast	mm	3935	3980	4100	4135	4160
	3.17	Aisle with for pallets 800 x 1200 lengthways	Ast	mm	4210	4250	4300	4350	4380
	3.18	Turning radius	Wa	mm	2280	2330	2415	2460	2480
	3.19	Internal Turning Radius	b13	mm	735	735	735	735	735
PERFORMANCE DATA	4.1	Travel Speed Laden/Unladen		km/h	20/21 | 19/19	20/21 | 19/19	20/21 | 19/19	20/21 | 19/19	20/21 | 19/19
	4.2	Lift Speed Laden/Unladen		mm/sec	580/600 | 510/600	570/600 | 510/600	560/600 | 490/600	480/500 | 410/460	460/480 | 390/440
	4.3	Lowering Speed Laden/Unladen		mm/sec	420/550	420/550	420/550	470/500	470/500
	4.4	Drawbar pull Laden/Unladen(@ 1.6km/h)		N	17951/ | 14210/ 17296 | 13670	17758/ | 14210/ 17226 | 13670	17522/ | 14210/ 17112 | 13670	17400/ | 14210/ 17060 | 13670	17326/ | 14210/ 17038 | 13670
	4.5	Max. Drawbar pull Laden/Unladen		N	21085/ | 17248/ 20060 | 16366	20893/ | 17248/ 19990 | 16366	20655/ | 17248/ 19876 | 16366	20530/ | 17248/ 19820 | 16366	20461/ | 17248/ 19803 | 16366
	4.6	Gradeability Laden/Unladen(@ 1.6km/h)		%	34/55 | 27/43	29.4/50 | 23/38.5	24.5/43 | 20/36	23/41 | 18.4/32.5	22/39 | 17.6/31.5
	4.7	Max. Gradeability Laden/Unladen		%	41/66 | 34/35	32/60 | 29.5/50	28/50 | 25/43	26/47 | 23/40	25/45 | 22/39.5
	4.8	Service Brake			Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
CONBUSTION ENGINE	5.1	Engine Manufacturer/type			YANMAR | YANMAR 4TNE98 4TNE94L	YANMAR | YANMAR 4TNE98 4TNE94L	YANMAR | YANMAR 4TNE98 4TNE94L	YANMAR | YANMAR 4TNE98 4TNE94L	YANMAR | YANMAR 4TNE98 4TNE94L
	5.2	Engine power according to DIN ISO1585		kW	43.7 | 34.2	43.7 | 34.2	43.7 | 34.2	43.7 | 34.2	43.7 | 34.2
	5.3	Rated speed		min-1	2300 | 2200	2300 | 2200	2300 | 2200	2300 | 2200	2300 | 2200
	5.4	Torque at 1/min		N-m	181@ | 162@ 1600 1500	181@ | 162@ 1600 1500	181@ | 162@ 1600 1500	181@ | 162@ 1600 1500	181@ | 162@ 1600 1500
	5.5	Cycle/Number of Cylinders/Displacement		-/cm3	4/4/ | 4/4/ 3319 3053	4/4/ | 4/4/ 3319 3053	4/4/ | 4/4/ 3319 3053	4/4/ | 4/4/ 3319 3053	4/4/ | 4/4/ 3319 3053
	5.6	Battery Voltage/normal capacity		V/Ah	12/90	12/90	12/90	12/90	12/90
ADDITION DATA	6.1	Operating pressure for attachments		bar	160	160	160	160	160
	6.2	Oil volume for attachments		L/min	65	65	65	65	65
	6.3	Fuel Tank Capacity		L	70	70	70	70	70

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions.
Products and specifications are subject to improvement and change without prior notices.


STANDARD EQUIPMENT & OPTIONS

STANDARD FEATURES AND OPTIONAL EXTRAS	
PERFORMANCE	
Transmission Type: Auto shift	✓
Aux. Weight	✓
Power Shoe Brakes	✓
DURABILITY	
Mast with JJ Beam	✓
Anti dust Overhead guard	✓
Dual element Air cleaner	✓
Pre cleaner	•
Autoshift Controller	•
SAFETY	
Operator Sensing System	✓
Back up Alarm - Inside	✓
Control Valve with Hydraulic locking	✓
Rear Safety Light	•
Rear Grab Bar with Horn	•
Strap, Static Ground	•
Strobe	•
Spark Arrester	•

* Remark : This list is based on factory data. Standard or optional can vary for specific countries.

• = option
✓ = standard

STANDARD FEATURES AND OPTIONAL EXTRAS	
OPERATOR COMFORT	
Hydraulic Control Levers	✓
Spacious Leg Room / Comfort Pedal Layout	✓
Clear Front/Rear/Mast Visibility	✓
LED Combination Lamps	✓
Compact Steering Wheel	✓
Large Entry Grip Bar	✓
Anti-skid Step Plate	✓
Panoramic Mirror	✓
Integrated Lamp Switch	✓
Adjustable Steering column	✓
Steering Knob	✓
Clip Board	✓
Modular Cabin - Type A,B,C	•
Full Cabin (with Heater & Air Conditioner)	•
Cup Holder	•
USB Port	•
Fuel Cap	•
Quick Disconnect Hose Couplings	•
Fan	•
SERVICEABILITY	
Toolless Side panel	✓
Toolless Floor Plate	✓
Hood locking cylinder	✓
Junction Box	✓

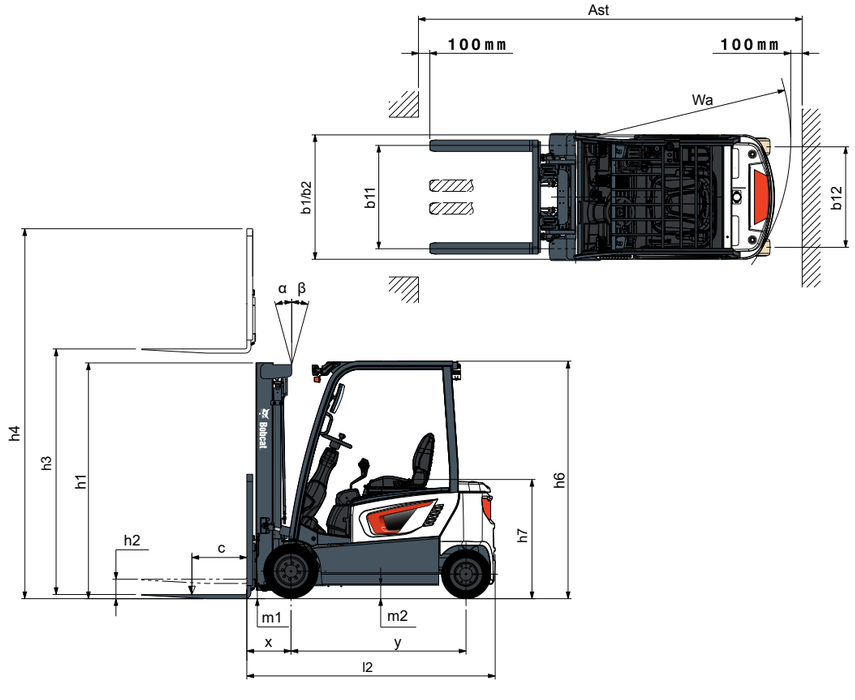

* Note: This dimensional drawing only applies to the 4 wheels series.

MAST SPECIFICATION AND RATED CAPACITIES

Model	Mast Type	Max. Fork Height		Mast Lowered Height		Fully Extended Height With Load Backrest		Free Lift With Load Backrest		Rated Load Capacities							
										Tilt Angle				Load Capacities			
										Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
										FWD	BWD	FWD	BWD	LC 500mm	LC 24in	LC 500mm	LC 24in
		mm	in	mm	in	mm	in	mm	in	deg	deg	deg	deg	kg	lb	kg	lb
D20NXP	STD	3,000	118	2,045	81	4,247	167	150	6	6	10	6	10	2,000	4,000	2,000	4,000
		3,300	130	2,195	86	4,547	179	150	6	6	10	6	10	2,000	4,000	2,000	4,000
		3,500	138	2,295	90	4,747	187	150	6	6	10	6	10	2,000	4,000	2,000	4,000
		4,000	157	2,595	102	5,347	211	150	6	6	6	6	6	2,000	4,000	2,000	4,000
		4,500	177	2,845	112	5,847	230	150	6	6	6	6	6	2,000	4,000	2,000	4,000
		5,000	197	3,095	122	6,347	250	150	6	6	6	6	6	2,000	4,000	2,000	4,000
	FF	3,210	126	2,155	85	4,474	176	950	37	6	10	6	10	2,000	4,000	2,000	4,000
	FFT	4,270	168	2,005	79	5,554	219	800	31	6	6	6	6	2,000	4,000	2,000	4,000
		4,710	185	2,145	84	5,974	235	940	37	6	6	6	6	1,950	3,950	2,000	4,000
		5,540	218	2,495	98	6,799	268	1,290	51	6	6	6	6	1,800	3,650	1,870	3,800
		5,990	236	2,645	104	7,249	285	1,440	57	6	6	6	6	1,300	2,650	1,800	3,650
		7,060	278	3,145	124	8,298	327	1,940	76	6	6	6	6	600	1,230	1,500	3,075
D25NXP	STD	3,000	118	2,045	81	4,247	167	150	6	6	10	6	10	2,500	5,000	2,500	5,000
		3,300	130	2,195	86	4,547	179	150	6	6	10	6	10	2,500	5,000	2,500	5,000
		3,500	138	2,295	90	4,747	187	150	6	6	10	6	10	2,500	5,000	2,500	5,000
		4,000	157	2,595	102	5,347	211	150	6	6	6	6	6	2,500	5,000	2,500	5,000
		4,500	177	2,845	112	5,847	230	150	6	6	6	6	6	2,500	5,000	2,500	5,000
		5,000	197	3,095	122	6,347	250	150	6	6	6	6	6	2,500	5,000	2,500	5,000
	FF	3,210	126	2,155	85	4,474	176	950	37	6	10	6	10	2,500	5,000	2,500	5,000
	FFT	4,270	168	2,005	79	5,554	219	800	31	6	6	6	6	2,400	4,850	2,450	5,000
		4,710	185	2,145	84	5,974	235	940	37	6	6	6	6	2,300	4,625	2,350	4,800
		5,540	218	2,495	98	6,799	268	1,290	51	6	4	6	4	1,900	3,875	2,200	4,325
		5,990	236	2,645	104	7,249	285	1,440	57	6	4	6	4	1,400	2,875	2,100	4,250
		7,060	278	3,145	124	8,298	327	1,940	76	6	4	6	4	650	1,330	1,600	3,250
D30NXP	STD	3,000	118	2,045	81	4,247	167	150	6	6	10	6	10	3,000	6,000	3,000	6,000
		3,300	130	2,195	86	4,547	179	150	6	6	10	6	10	3,000	6,000	3,000	6,000
		3,500	138	2,295	90	4,747	187	150	6	6	10	6	10	3,000	6,000	3,000	6,000
		4,000	157	2,595	102	5,347	211	150	6	6	6	6	6	3,000	6,000	3,000	6,000
		4,500	177	2,845	112	5,847	230	150	6	6	4	6	4	2,950	6,000	3,000	6,000
		5,000	197	3,095	122	6,347	250	150	6	6	4	6	4	2,800	5,675	2,800	5,675
	FF	3,210	126	2,155	85	4,474	176	950	37	6	10	6	10	3,000	6,000	3,000	6,000
	FFT	4,270	168	2,005	79	5,554	219	800	31	6	6	6	6	2,800	5,675	2,900	5,875
		4,710	185	2,145	84	5,974	235	940	37	6	4	6	4	2,650	5,375	2,800	5,675
		5,540	218	2,495	98	6,799	268	1,290	51	6	4	6	4	2,000	4,000	2,600	5,300
		5,990	236	2,645	104	7,249	285	1,440	57	6	4	6	4	1,500	3,075	2,450	5,000
		7,060	278	3,145	124	8,298	327	1,940	76	6	4	6	4	700	1,435	1,700	3,485
D33NXP	STD	3,000	118	2,045	81	4,252	167	150	6	6	10	6	10	3,300	6,600	3,300	6,600
		3,300	130	2,195	86	4,552	179	150	6	6	10	6	10	3,300	6,600	3,300	6,600
		3,500	138	2,295	90	4,752	187	150	6	6	10	6	10	3,300	6,600	3,300	6,600
		4,000	157	2,595	102	5,352	211	150	6	6	6	6	6	3,300	6,600	3,300	6,600
		4,500	177	2,845	112	5,852	230	150	6	6	4	6	4	3,220	6,375	3,220	6,375
		5,000	197	3,095	122	6,352	250	150	6	6	4	6	4	2,900	5,825	3,050	6,125
	FF	3,210	126	2,155	85	4,479	176	950	37	6	10	6	10	3,300	6,600	3,300	6,600
	FFT	4,270	168	2,005	79	5,559	219	800	31	6	6	6	6	3,050	6,125	3,050	6,125
		4,710	185	2,145	84	5,979	235	940	37	6	4	6	4	2,900	5,825	2,950	5,950
		5,540	218	2,495	98	6,804	268	1,290	51	6	4	6	4	2,100	4,250	2,750	5,575
		5,990	236	2,645	104	7,254	286	1,440	57	6	4	6	4	1,600	3,250	2,600	5,325
		7,060	278	3,145	124	8,298	327	1,940	76	6	4	6	4	750	1,535	1,800	3,690
D35NXP	STD	3,000	118	2,045	81	4,252	167	150	6	6	10	6	10	3,500	7,000	3,500	7,000
		3,300	130	2,195	86	4,552	179	150	6	6	10	6	10	3,500	7,000	3,500	7,000
		3,500	138	2,295	90	4,752	187	150	6	6	10	6	10	3,500	7,000	3,500	7,000
		4,000	157	2,595	102	5,352	211	150	6	6	6	6	6	3,500	7,000	3,500	7,000
		4,500	177	2,845	112	5,852	230	150	6	6	4	6	4	3,360	6,850	3,350	6,850
		5,000	197	3,095	122	6,352	250	150	6	6	4	6	4	3,000	6,000	3,200	6,500
	FF	3,210	126	2,155	85	4,479	176	950	37	6	10	6	10	3,500	7,000	3,500	7,000
	FFT	4,270	168	2,005	79	5,559	219	800	31	6	6	6	6	3,210	6,325	3,200	6,425
		4,710	185	2,145	84	5,979	235	940	37	6	4	6	4	3,100	6,175	3,100	6,175
		5,540	218	2,495	98	6,804	268	1,290	51	6	4	6	4	2,200	4,325	2,880	5,750
		5,990	236	2,645	104	7,254	286	1,440	57	6	4	6	4	1,700	3,350	2,750	5,575
		7,060	278	3,145	124	8,298	327	1,940	76	6	4	6	4	800	1,640	1,950	3,995

Note : Mast Specifications & Rated Capacities are based on standard chassis with pneumatic tire and without side shifter.

Bobcat®

DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.
©2023 Bobcat Company. All Rights Reserved.

Doosan Bobcat Korea Co., Ltd.

©2023 BOBCAT