
Elevate with Safety

A Simple Ideology

It takes just a few words to describe HYDRAMAK Mobile Elevating Work Platforms: Coherence, Agility and accuracy. These qualities are always focused on the needs of the Rental Companies as of the End Users, that recognise an AWP with Low Maintenance Costs and High Availability.


A choice rewarded by supply to major Utility, Municipalities, Power and Telecommunication Companies making HYDRAMAK one of the most respected & reliable Make.

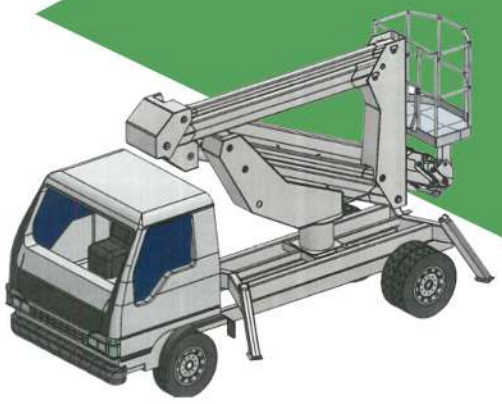

HYDRAMAK


Integrated & Installed by:
M N Engineering Solutions


www.mnes.in | info@mnes.in

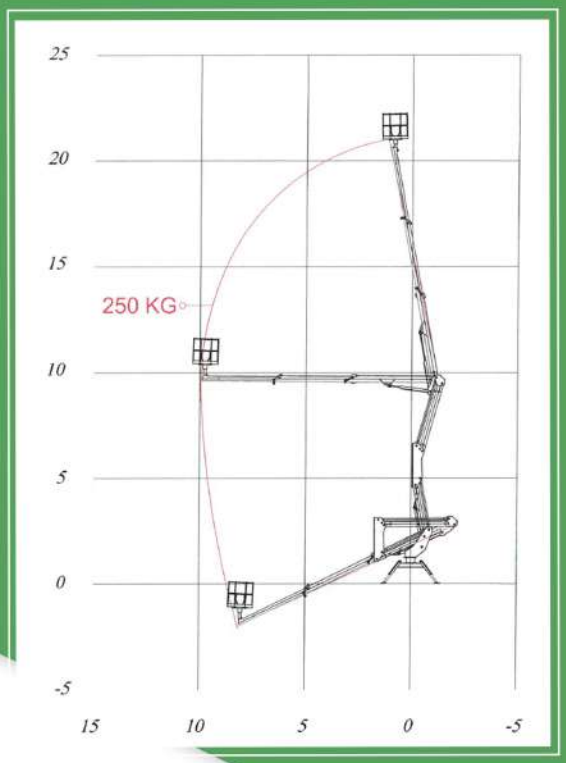


Technical Specification
HYDRAMAK HM24A

Max. Working Height	23.2 m
Max. Cage Bottom Height	21.2 m
Max. Outreach (250 Kg)	10.0 m
Turret Rotation	± 360°
Cage Rotation	± 90°
Cage Capacity	250 Kg
Cage Dimension	1.4m X 1.1m X 0.8m
Equipment Closed Height (from Chassis Frame)	2.2 m
Width in Transport Position	2.1 m
Min. Truck GVW	5100 Kg
Air/Water Pipeline (till Cage)	Provided
Electric Wiring, 230v/12v (till Cage)	Provided
Stabilizers (Up/Down)	A - Type
Test Load for Stability	150%
EN280	Complaint

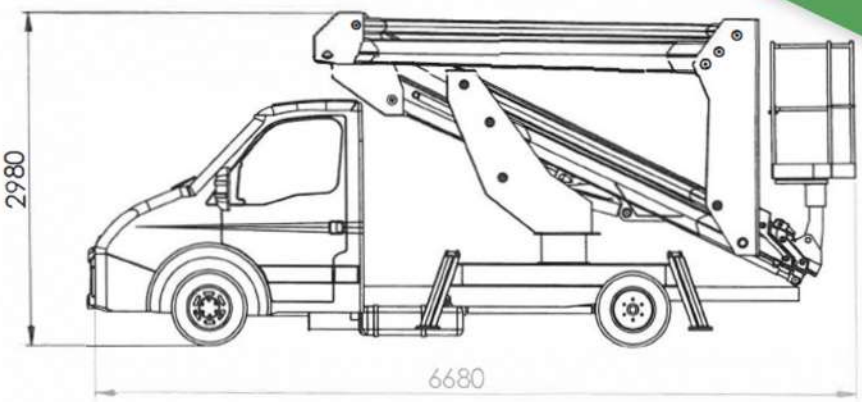

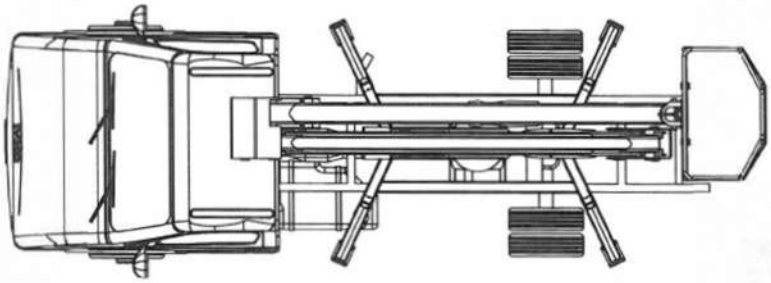

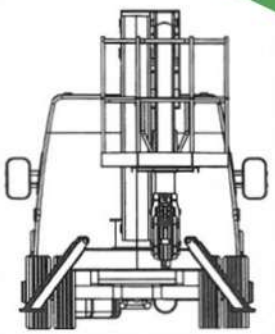

Contact Us Today! Deals don't last forever...!!!

M: +91 9868238367 | E: info@eeipl.co.in | www.eeipl.co.in

Product specifications are subject to change without notice or obligation.
Technical specifications & drawings in this brochure are for illustration only.
Country specific regulations to be followed.

Authorised Distributor - **Equipage ES**