TRAFFIC AND ENGINEERING BOARD

D.K.SINGH/ Instructor/ ZRTI,Bhuli

TRAFFIC AND ENGINEERING BOARD

SHUNTING LIMIT BOARD (SLB)



TRAFFIC AND ENGINEERING BOARD

SHUNTING LIMIT BOARD (SLB)

1. A rectangular board painted yellow with a black cross on the facing side.
2. It bears the words "Shunting Limit" under the cross mark.
3. A small white light is lit up at night – visible from both directions.
4. It is provided at a class 'B' station worked on the Absolute Block system on single line section, if there is no Advance Starter of the opposite side at an adequate distance from the First Stop Signal (FSS). It is provided irrespective of signalling system.

TRAFFIC AND ENGINEERING BOARD

SHUNTING LIMIT BOARD (SLB)

5. It is provided at a distance of 400 meters from the First Stop Signal in TALQ system and at a distance of 180 meters from the FSS in MAUQ/MACLS system.
6. It demarcates the boundaries of Station Section and Block Section.
7. Station Section may be enhanced providing Shunting Limit Board.
8. It is not a signal.

TRAFFIC AND ENGINEERING BOARD

BLOCK SECTION LIMIT BOARD



TRAFFIC AND ENGINEERING BOARD

BLOCK SECTION LIMIT BOARD

1. A rectangular board painted yellow with a black cross on the facing side bearing the words "Block Section Limit".
2. A small white light is lit up at night visible from both directions.
3. It demarcates the boundaries of station section and Block section.
4. It is not a signal.
5. Placed not less than 180 m inside the First Stop Signal (FSS) and clearing the respective fouling mark.

TRAFFIC AND ENGINEERING BOARD

BLOCK SECTION LIMIT BOARD

6. The following conditions are necessary for providing a BSLB.

a) 'B" class station

b) Double line section.

c) Worked under Absolute Block System.

d) Equipped with Multiple Aspect Signalling.

e) Outer most point (at an adequate distance from the FSS) is not facing or there is no point at the approaching end of the train.

TRAFFIC AND ENGINEERING BOARD

PASSENGER WARNING BOARD



TRAFFIC AND ENGINEERING BOARD

PASSENGER WARNING BOARD

a) It is a rectangular board 1.8 metres long and 0.53 metres wide with yellow stripes diagonally painted on black background facing towards the approaching train.

b) It is located at 960 meters in rear of the First Stop signal/ Gate Stop signal. But at the stations where there is Distance Signal provided at a distance of 1000 meters from the FSS, the Passenger Warning Board is not provided.

TRAFFIC AND ENGINEERING BOARD

PASSENGER WARNING BOARD

c) Intention is to warn the LP of the approaching train that he/ she is approaching the First Stop signal of a station/ Gate Stop signal.

d) The yellow strips on this board are reflected by the head light of the approaching train at night.

TRAFFIC AND ENGINEERING BOARD

GOODS WARNING BOARD



TRAFFIC AND ENGINEERING BOARD

GOODS WARNING BOARD

a) It is a rectangular board 1.8 metres long and 0.53 metres wide with a circular yellow band at the centre and two yellow horizontal bands one above and the other below the circular band on a black background facing towards the approaching train.

b) It is fixed on a post at a height of 2.10 metres with its length vertical and its face at right angles to the track. It is erected at a distance of not less than 1400 metres in rear of the first stop signal/gate signal./ Gate Stop signal.

c) Intention is to warn the LP of the approaching train that he is approaching the First Stop signal of a station/ Gate Stop signal.

TRAFFIC AND ENGINEERING BOARD

GOODS WARNING BOARD


c) On the Rajdhani/Shatabdi Express route there should be only ONE warning board is intended for the guidance of drivers of passenger as well as goods trains. This board should be fixed at a distance of not less than 1500 metres in rear of the first stop signal/gate signal. This distance should be increased to 1700 metres for stations approached on a falling gradient of 1 in 200 or steeper.

d) On sections where double distant signals are provided, the provision of warning board is to be dispensed with.

e) The yellow strips on this board are reflected by the head light of the approaching train at night.

TRAFFIC AND ENGINEERING BOARD

CAUTION INDICATOR

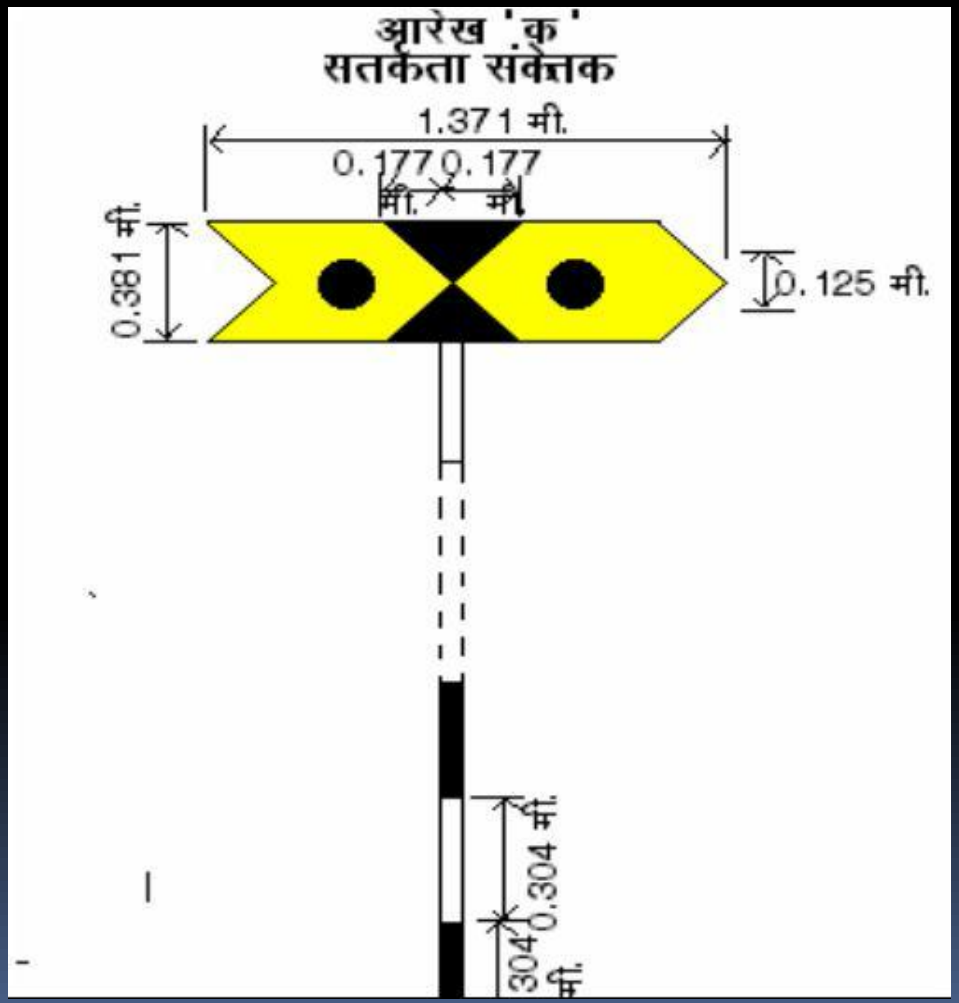

TRAFFIC AND ENGINEERING BOARD

CAUTION INDICATOR

- Caution indicator shall be fixed at 1200 meters from the point where speed restriction is to commence.
- This shall be exactly to the diagram as shown in the margin and shall consist of a horizontal board 1400 mm wide by 400 mm deep fishtailed to the left and pointed to the right, and painted yellow and black.
- This board shall be fixed on a 2 meters high above the rail level to the bottom of the board and painted with 300 mm high bands of white and black.


TRAFFIC AND ENGINEERING BOARD

CAUTION INDICATOR

- The indicator board for temporary restriction shall display at night two yellow lights horizontally displayed towards incoming train. At site of permanent restrictions the speed ahead will be painted on the caution indicator board.
- In the case of temporary restriction speed will be indicated by small detachable number plates which can be changed.
- Luminous paint shall be used in both the cases.
- In the case of stop Dead Restriction, the figure 'o' will be painted on Caution Indicator Board.
- In the case of multiple speed restrictions in series as in case of Track Renewal works only first speed restriction shall be indicated on the caution indicator Board

TRAFFIC AND ENGINEERING BOARD

SPEED INDICATOR

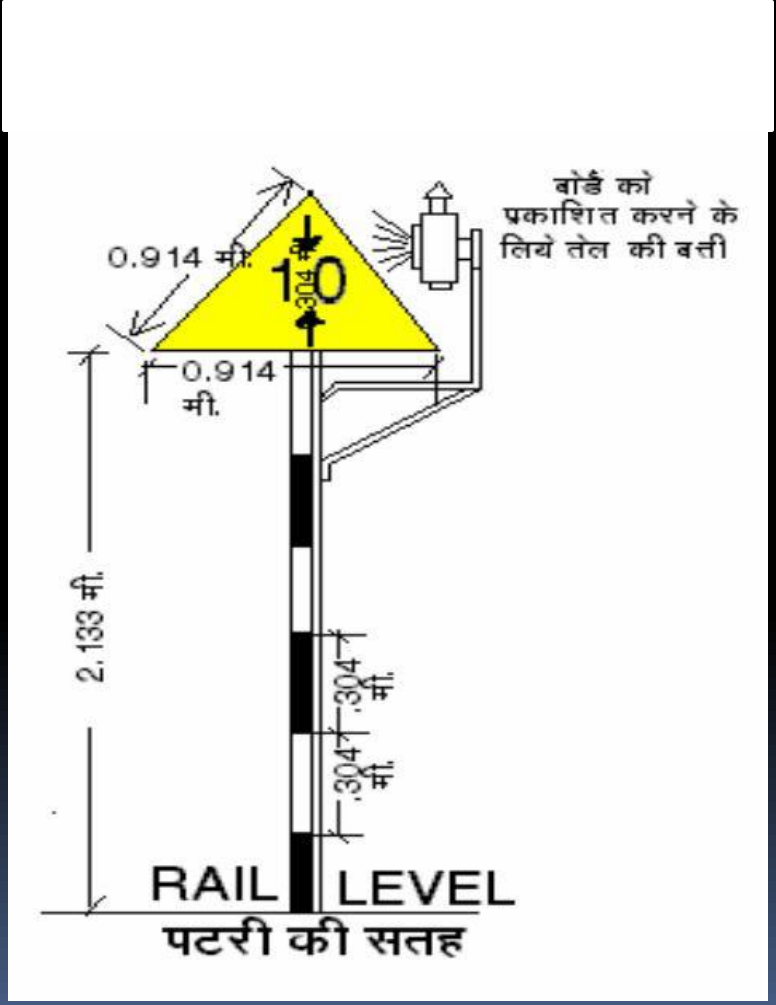

TRAFFIC AND ENGINEERING BOARD

SPEED INDICATOR

a) This board shall consists of a yellow equilateral triangular board, painted yellow and it shall indicates in KMPH at which a train is to proceed past the indicator.

b) The speed shall be provided for both permanent and temporary restrictions.


TRAFFIC AND ENGINEERING BOARD

SPEED INDICATOR

3. The indicators for temporary restrictions shall be illuminated by night fixing a hand signal lamp in front of it. The indicator for permanent restrictions shall not be illuminated.
4. This is placed at a distance of 30 meters from the work place.

TRAFFIC AND ENGINEERING BOARD

STOP INDICATOR

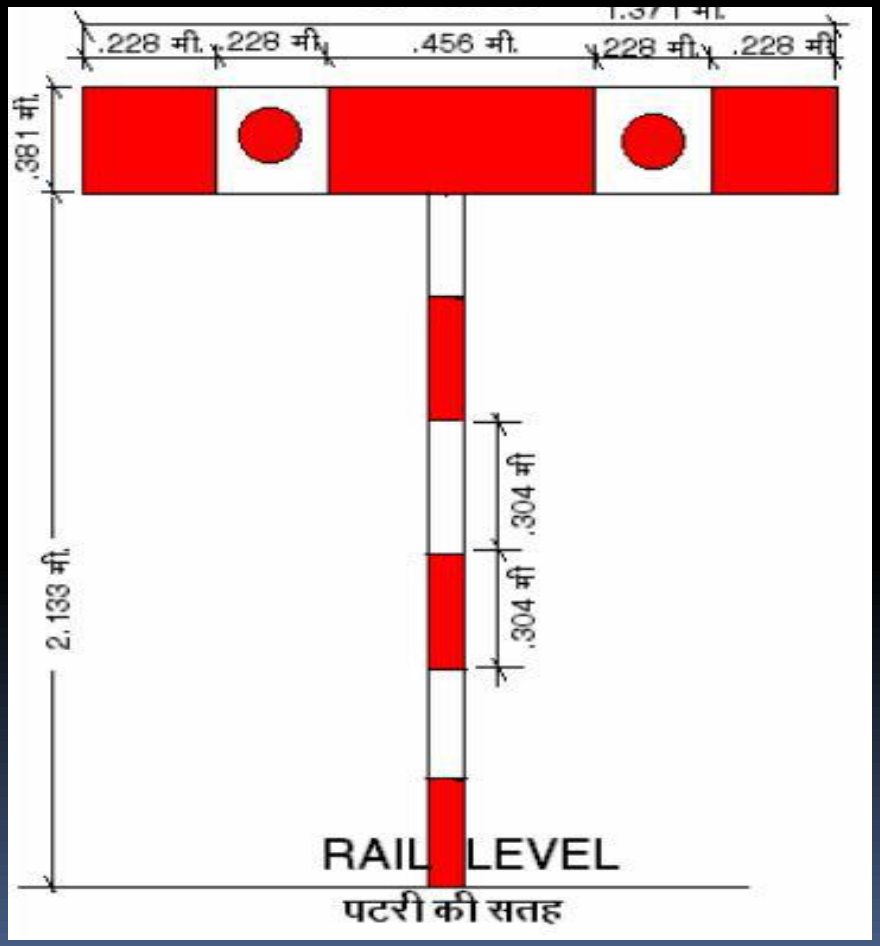

TRAFFIC AND ENGINEERING BOARD

STOP INDICATOR

1. This shall consist of a horizontal board of 1.371 meters length and 0.381 meters wide and painted red and white vertical strips as shown in the adjacent diagram.
2. It is fixed at a distance of 30 meters from the obstruction.
3. It is illuminated with two red light at night.


TRAFFIC AND ENGINEERING BOARD


STOP INDICATOR

4. A man of engineering department shall be deputed at this board with a book with him. The LP shall stop his train at this board and gives his initial in this book with the train No., Name, Date. Then alright signal shall be shown to the LP by this man to proceed with his train.

TRAFFIC AND ENGINEERING BOARD

TERMINATION INDICATOR

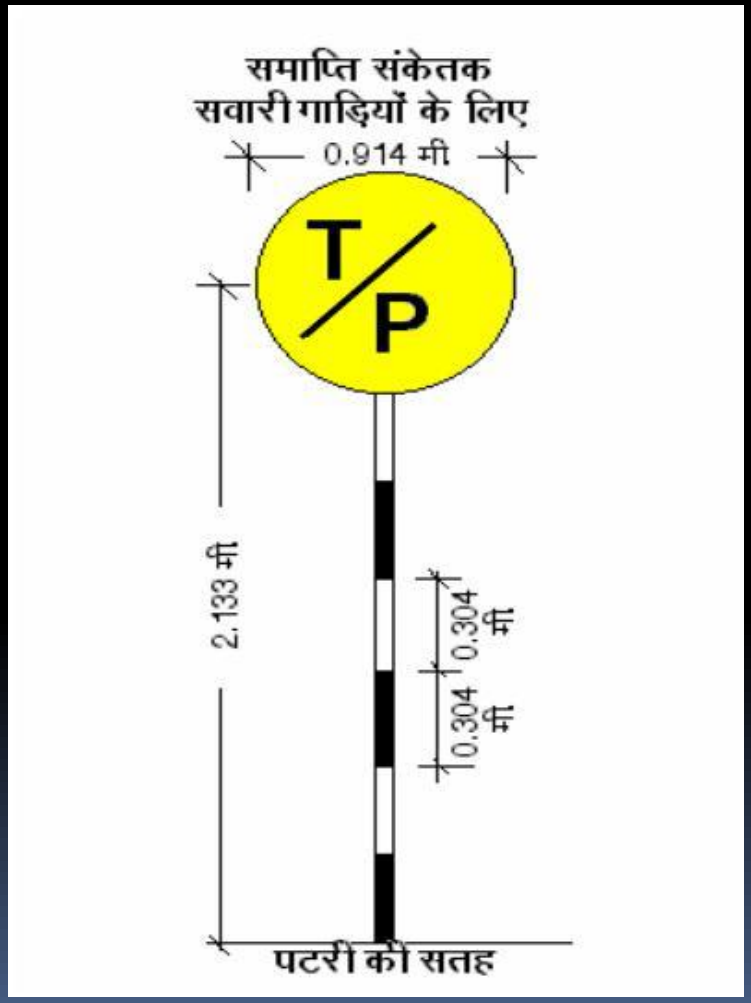

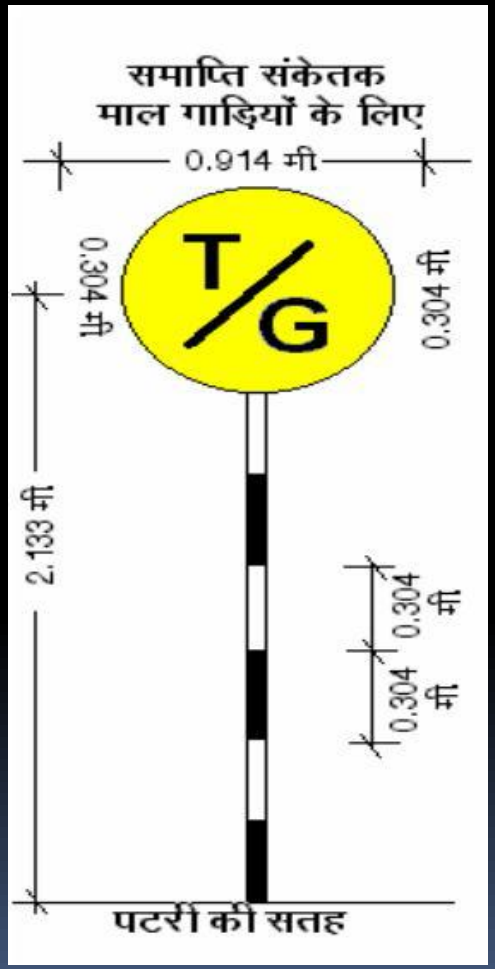

TRAFFIC AND ENGINEERING BOARD

TERMINATION INDICATOR

1. This is yellow circular board consisting of 0.914 meters diameter disc bearing the letters “T/P” for passenger train and “T/G” for goods train in black as shown in the figure above.
2. The termination indicator for passenger train “T/P” is provided at a distance equal to the length of the longest passenger train running in that section. In the same way the termination indicators for goods train “T/G” is provided at a distance equal to the longest goods train running in that section.


TRAFFIC AND ENGINEERING BOARD

TERMINATION INDICATOR

3. The LP of passengers and goods train shall resume their normal speed from these indicators.
4. If the passenger train or the goods train is of short length or it's an engine then, the LP shall resume their speed on the hand signal of the Guard before the 'T/P' or 'T/G' board.


TRAFFIC AND ENGINEERING BOARD

SPEED INDICATOR

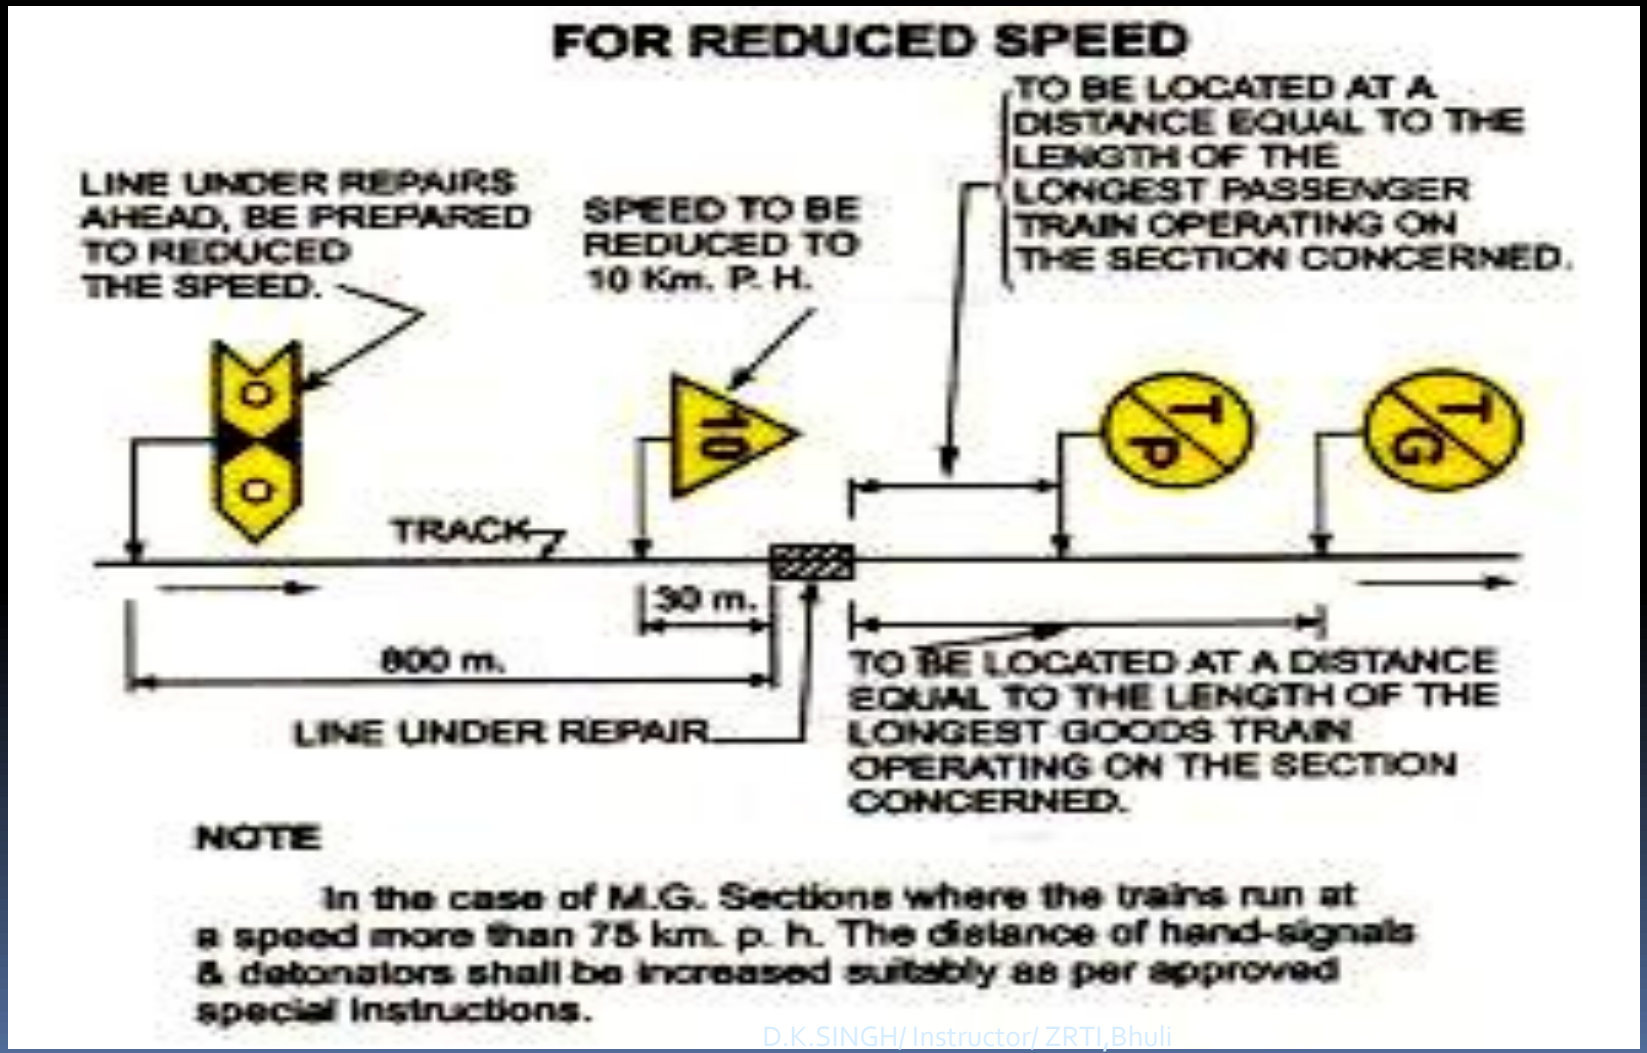


TRAFFIC AND ENGINEERING BOARD

SPEED INDICATOR

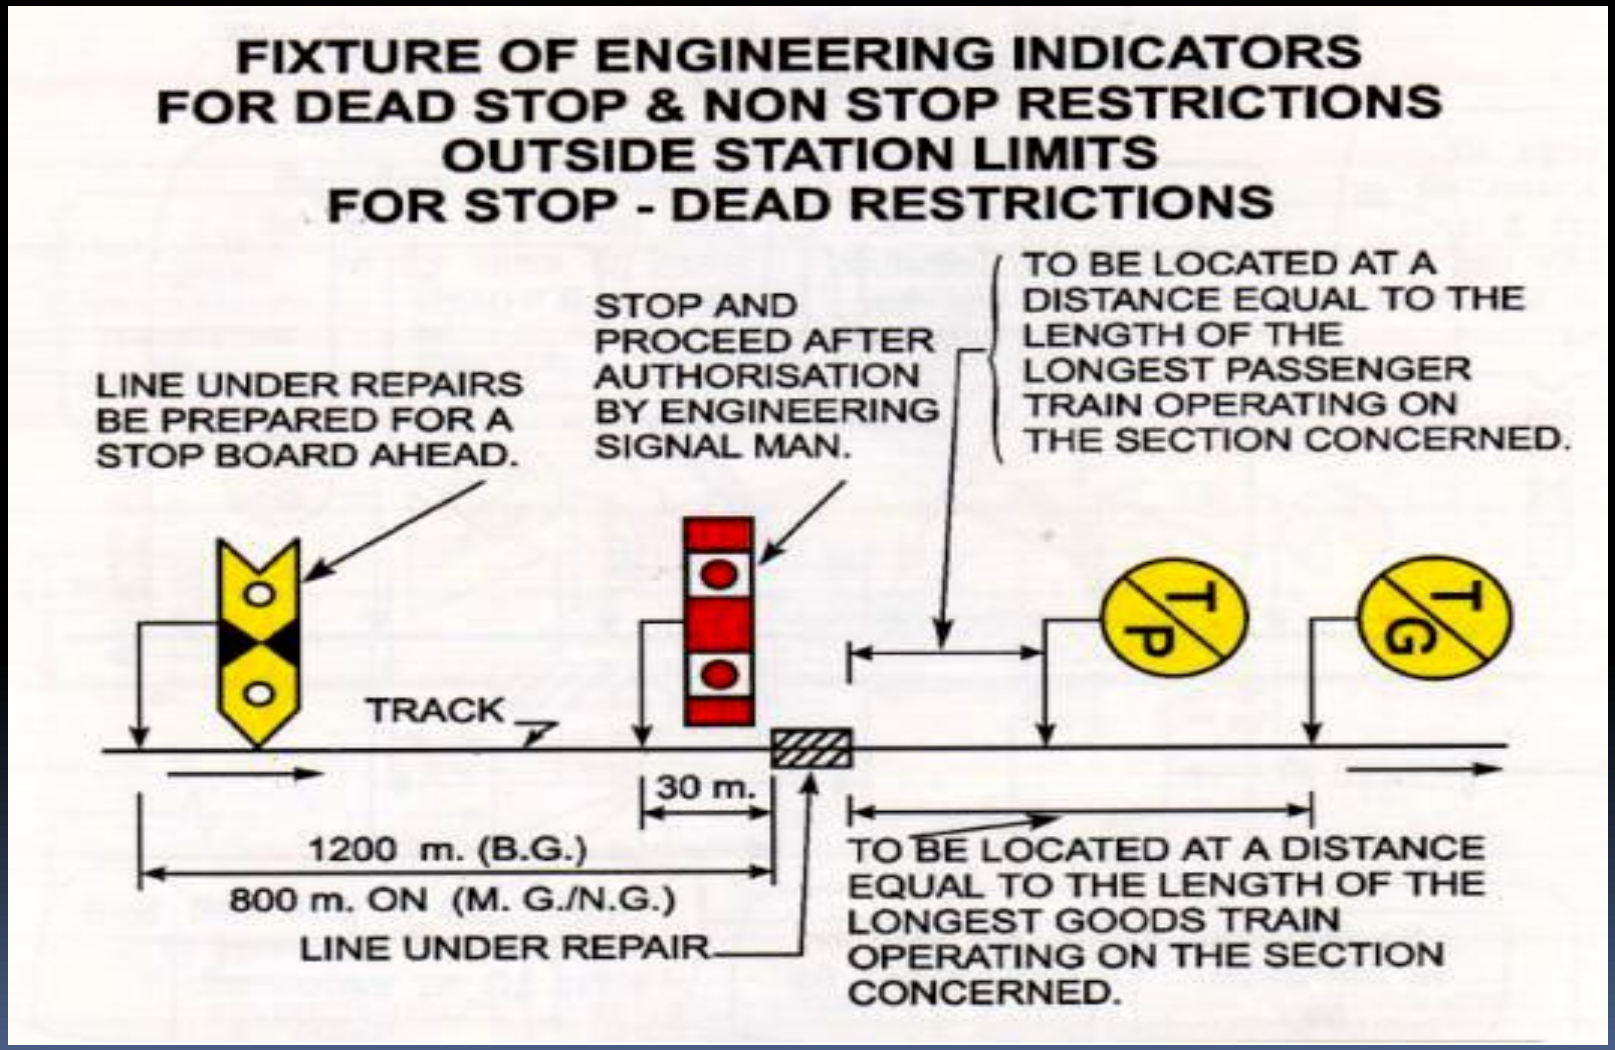

TRAFFIC AND ENGINEERING BOARD

WHISTLE BOARD

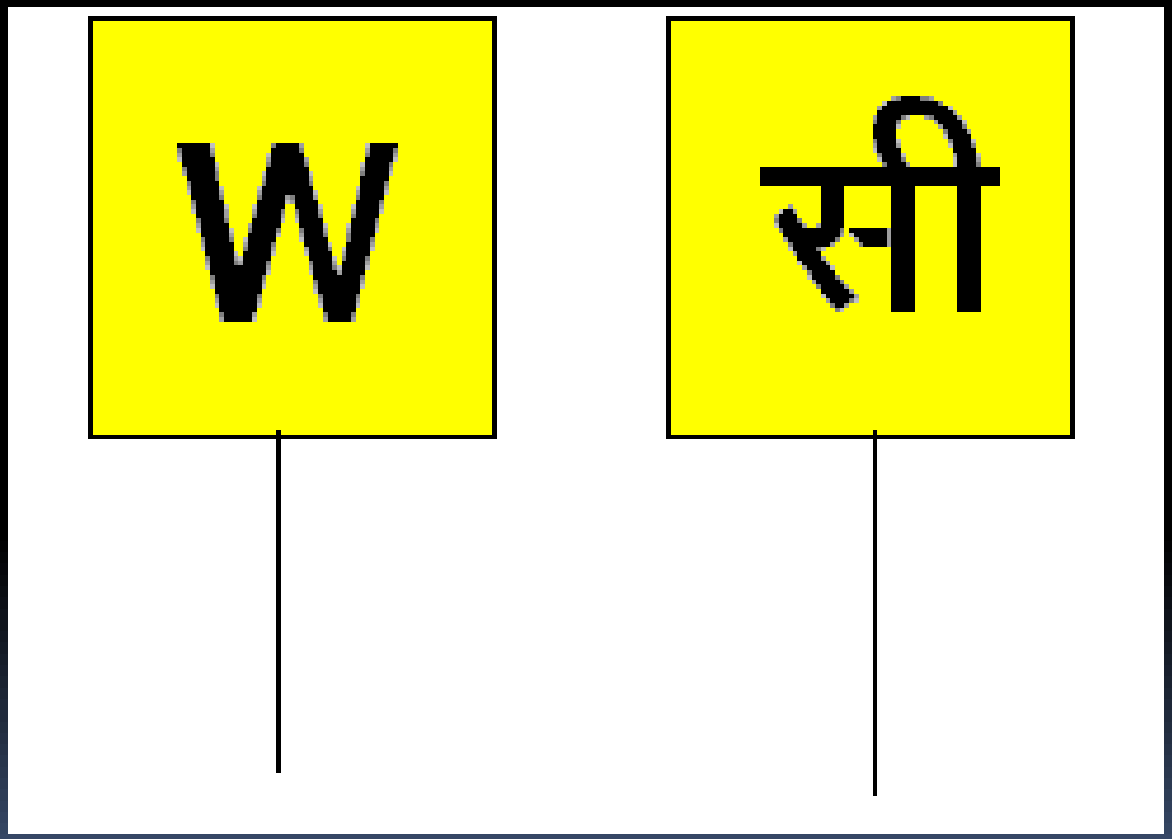


TRAFFIC AND ENGINEERING BOARD

WHISTLE BOARD

- Whistle Board as shown in figure shall be provided at a distance of 600 metres on the approach of Curve, Tunnel or other Vulnerable places. Driver/Motorman must sound whistle /horn immediately after sighting the Whistle Board till the full train has passed the same to give a very effective audible warning to the people or other animals about the approaching train.

TRAFFIC AND ENGINEERING BOARD

WHISTLE BOARD FOR LEVEL CROSSING

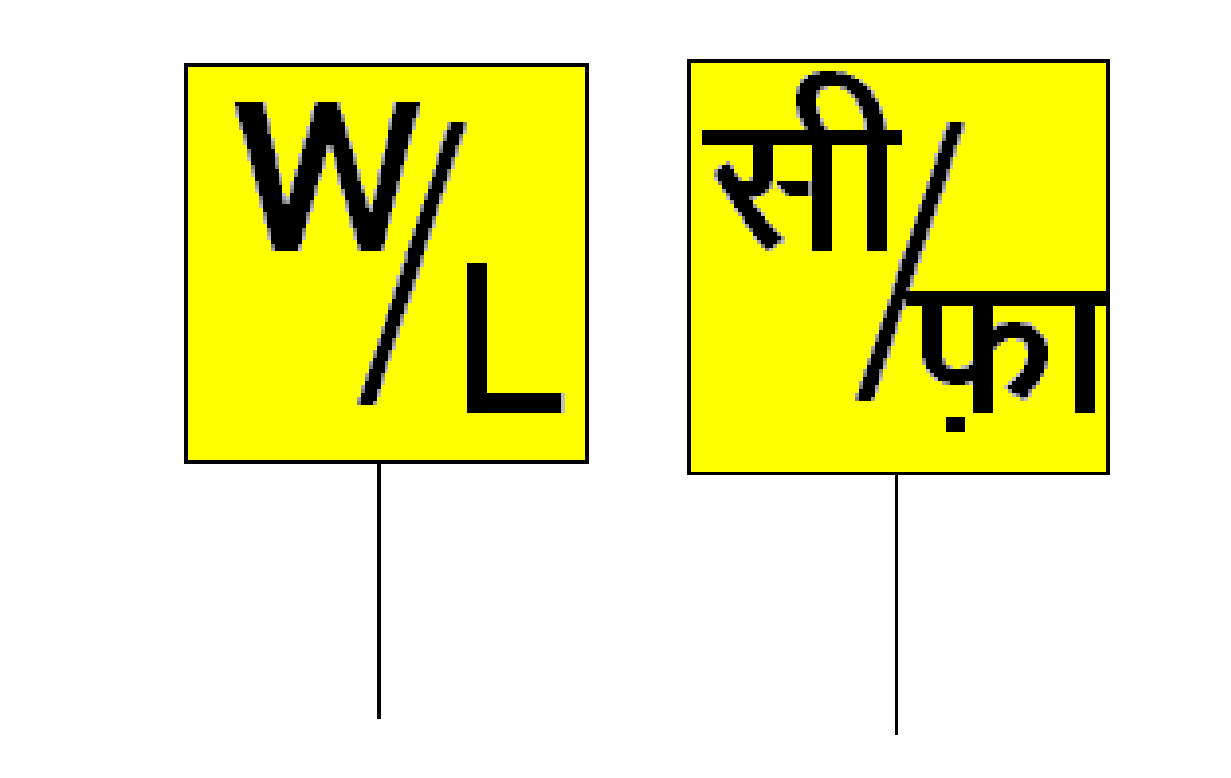

TRAFFIC AND ENGINEERING BOARD

WHISTLE BOARD FOR LEVEL CROSSING

- Whistle Board as shown in figure shall be provided at a distance of 600 metres on the approach of all manned and unmanned Level Crossings. Driver/Motorman must sound whistle /horn immediately after sighting the Whistle Board till the full train has passed the Level Crossing to give a very effective audible warning to the road users/motor vehicle Drivers about the approaching train.

TRAFFIC AND ENGINEERING BOARD

RW/L BOARD FOR UNMANNED LEVEL CROSSING



TRAFFIC AND ENGINEERING BOARD

RW/L BOARD FOR UNMANNED LEVEL CROSSING

- RW/L Board as shown in figure shall be provided at a distance of 250 metres on the approach of all unmanned Level Crossings. Driver/Motorman must sound continuous whistle /horn immediately after sighting the RW/L Board till the full train has passed the Level Crossing to give a very effective audible warning to the road users/motor vehicle Drivers about the approaching train.

THANKYOU

D.K.SINGH
TRANSPORTATION INSTRUCTOR
ZRTI/BHULI