



Title: Schematic for heater control and temperature monitoring of nano-stage





Brief:
Two bridges can be controlled independently by the Microcontroller.
Two RTD interface is implemented to measure temperature using Wheatstone bridge-balancing principle.
Bridge resistances shall be adjusted according to the application requirement.

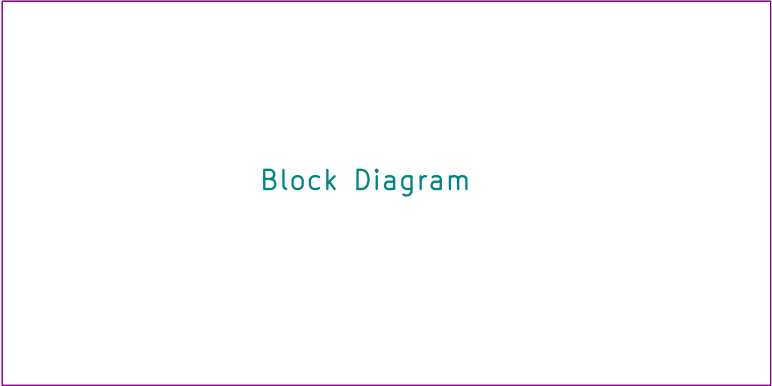



Title: Nano stage controller
Developed by: Device Design Lab
Developed for: Cryonano Labs Pvt. Ltd.


Drawn by: SBB	Checked by:	Approved by:
Page Id: 1/10	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on:

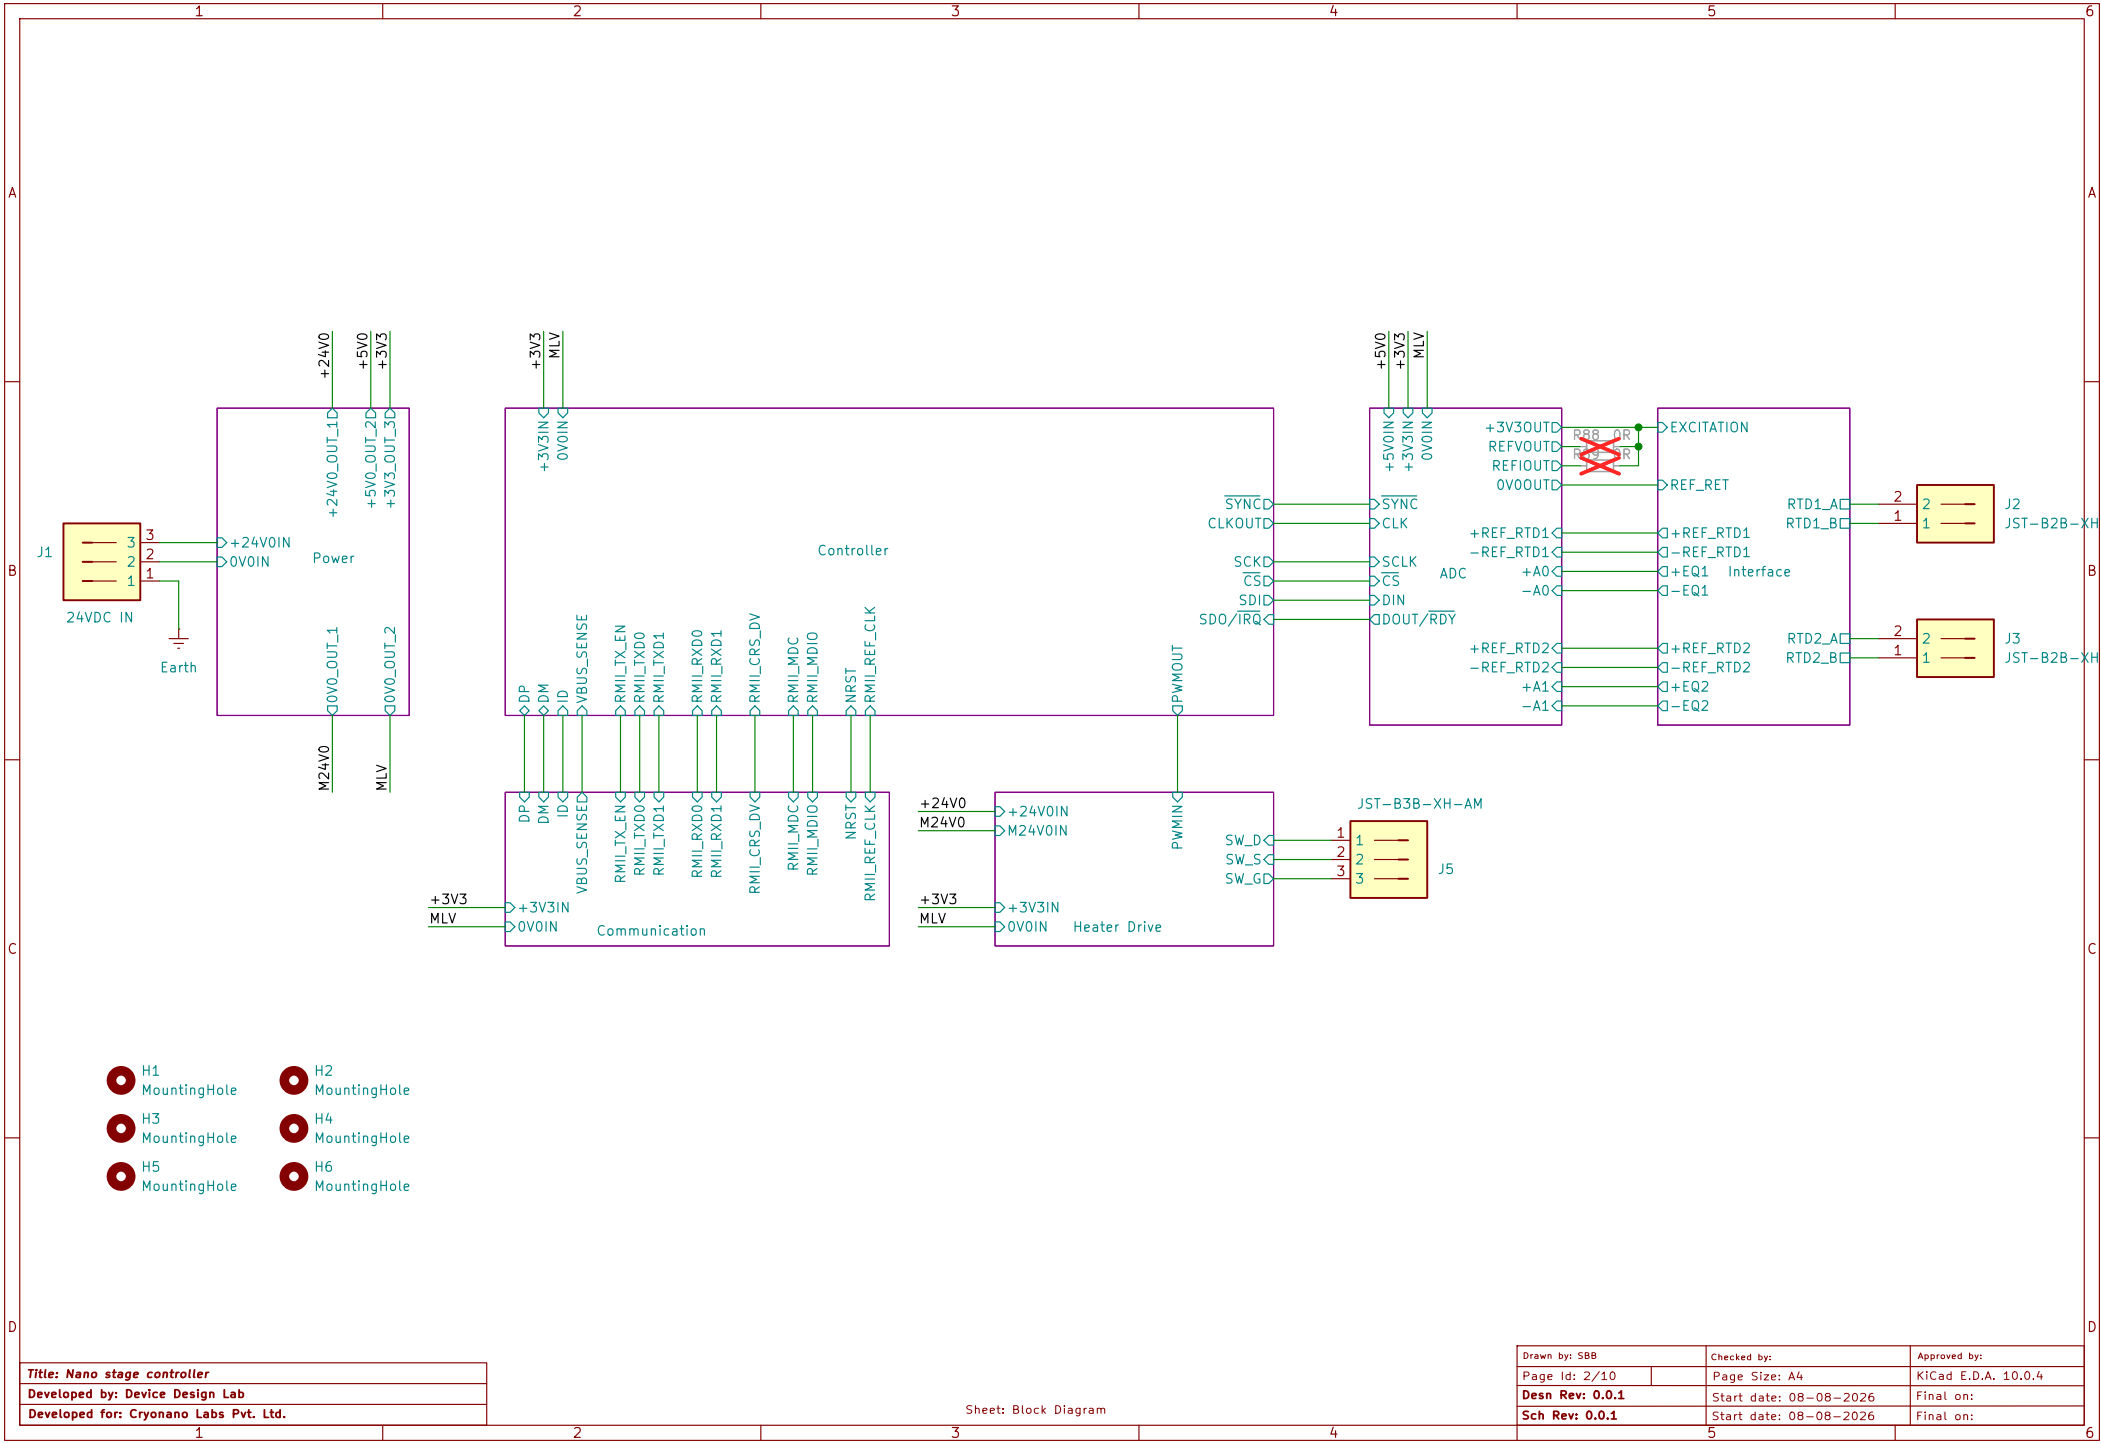

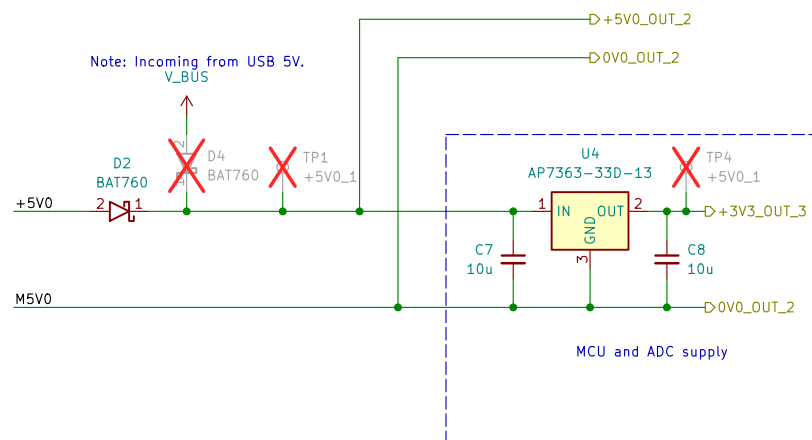
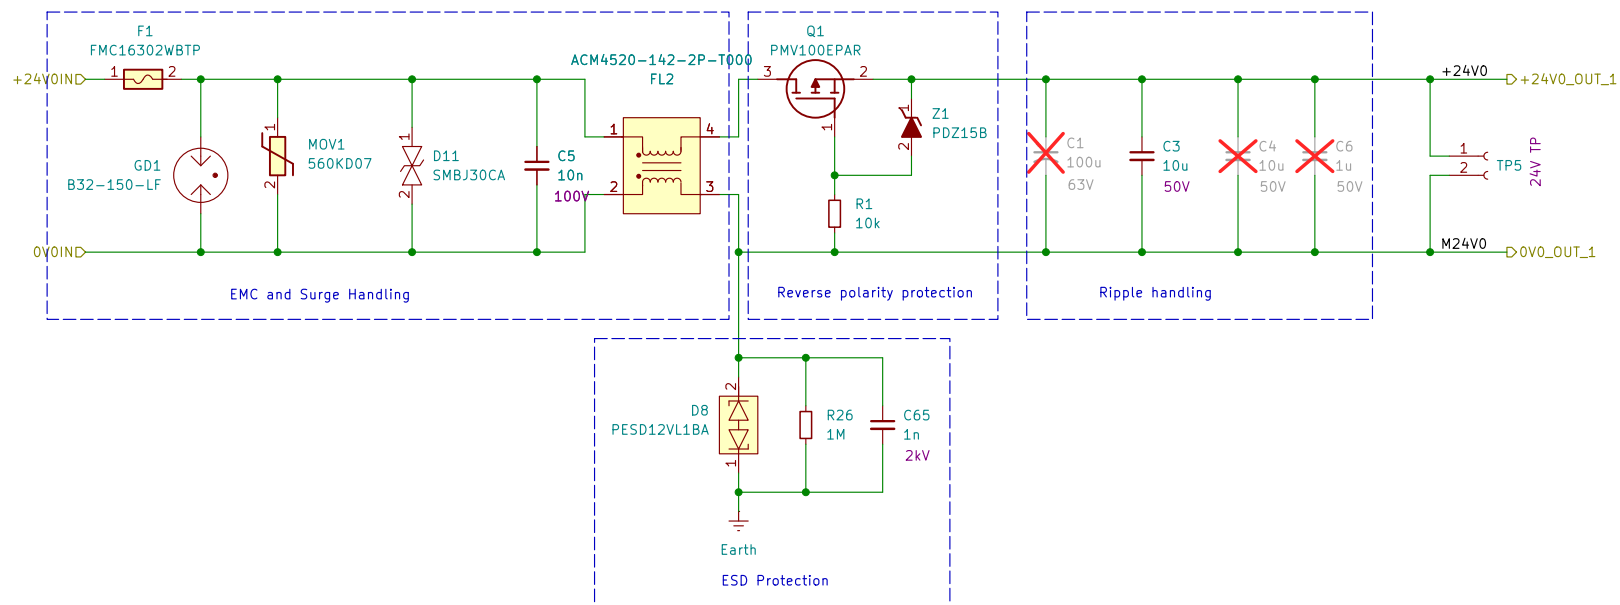


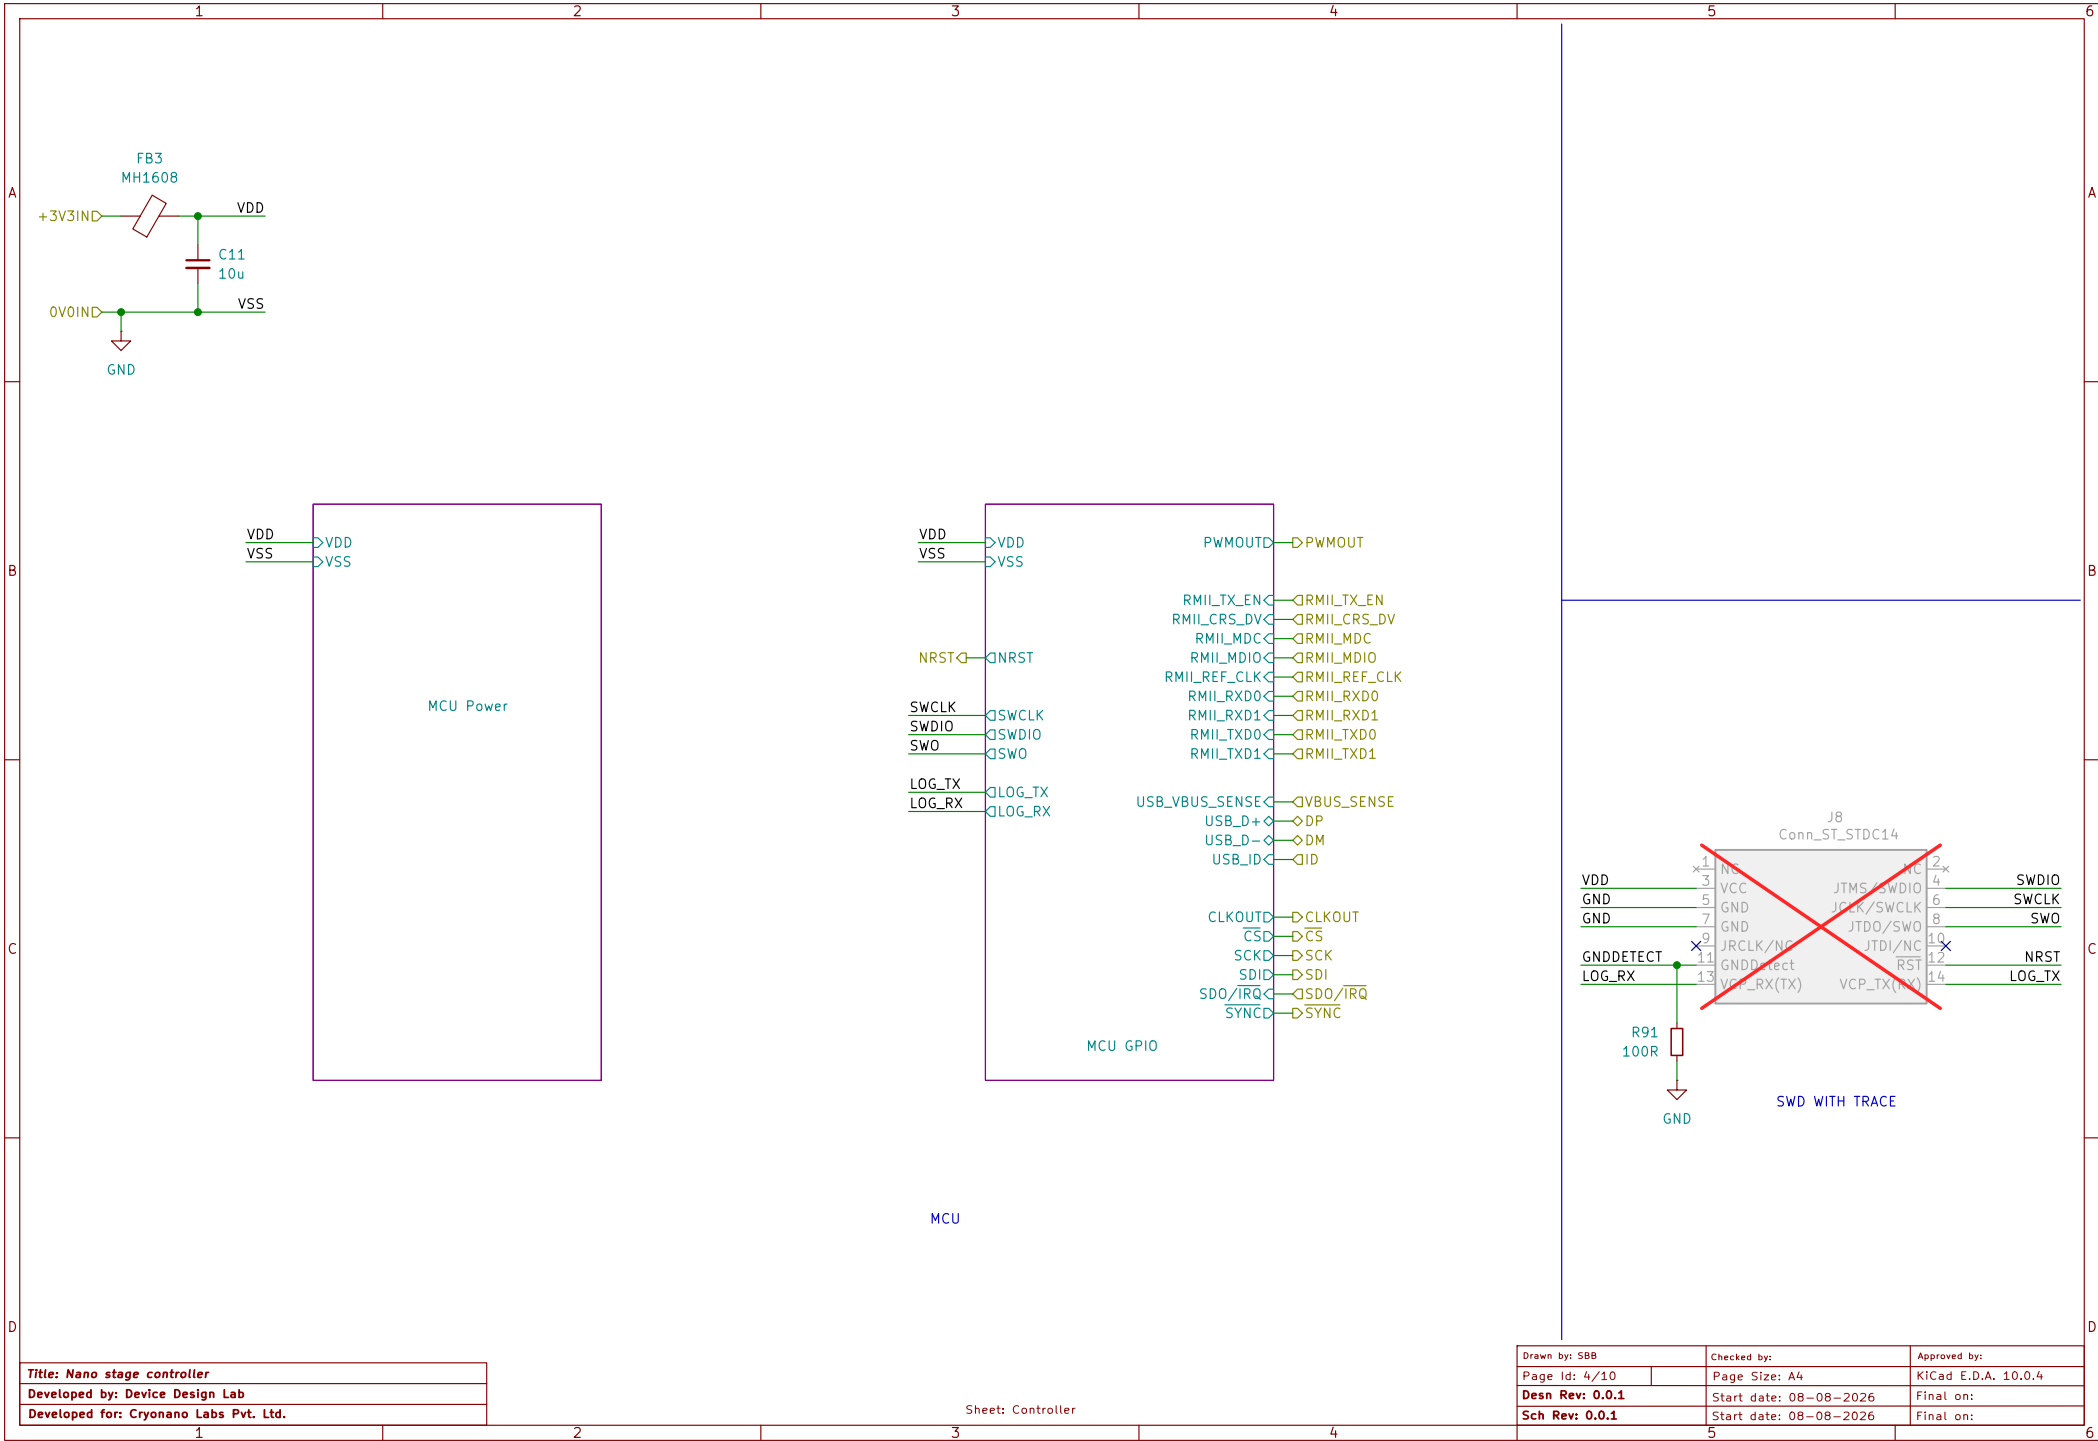

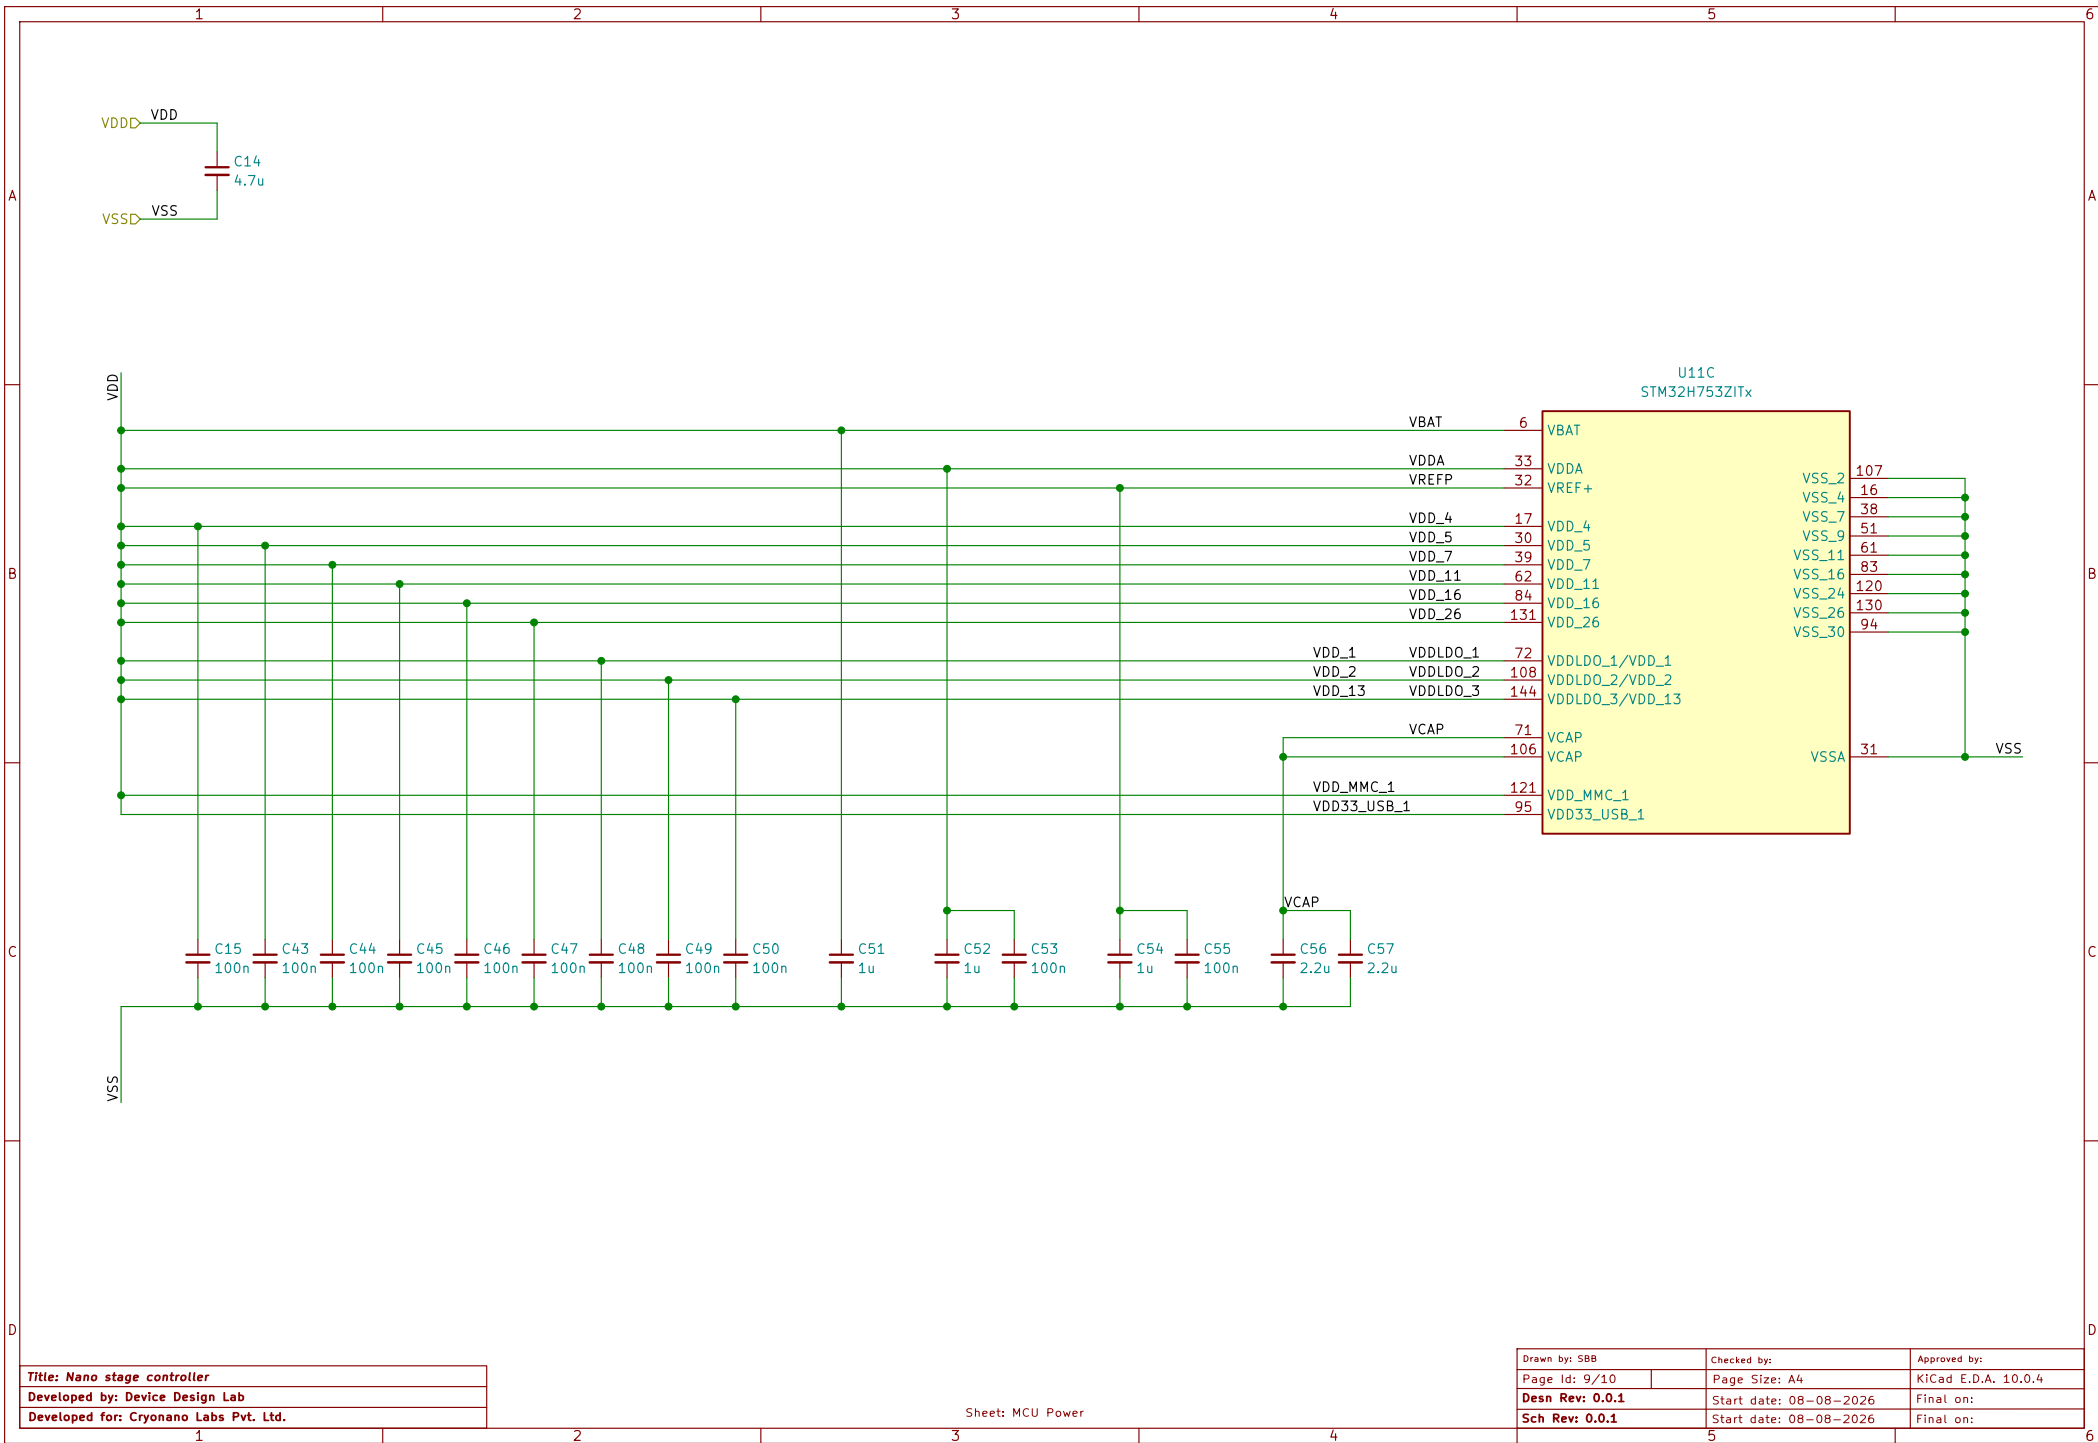

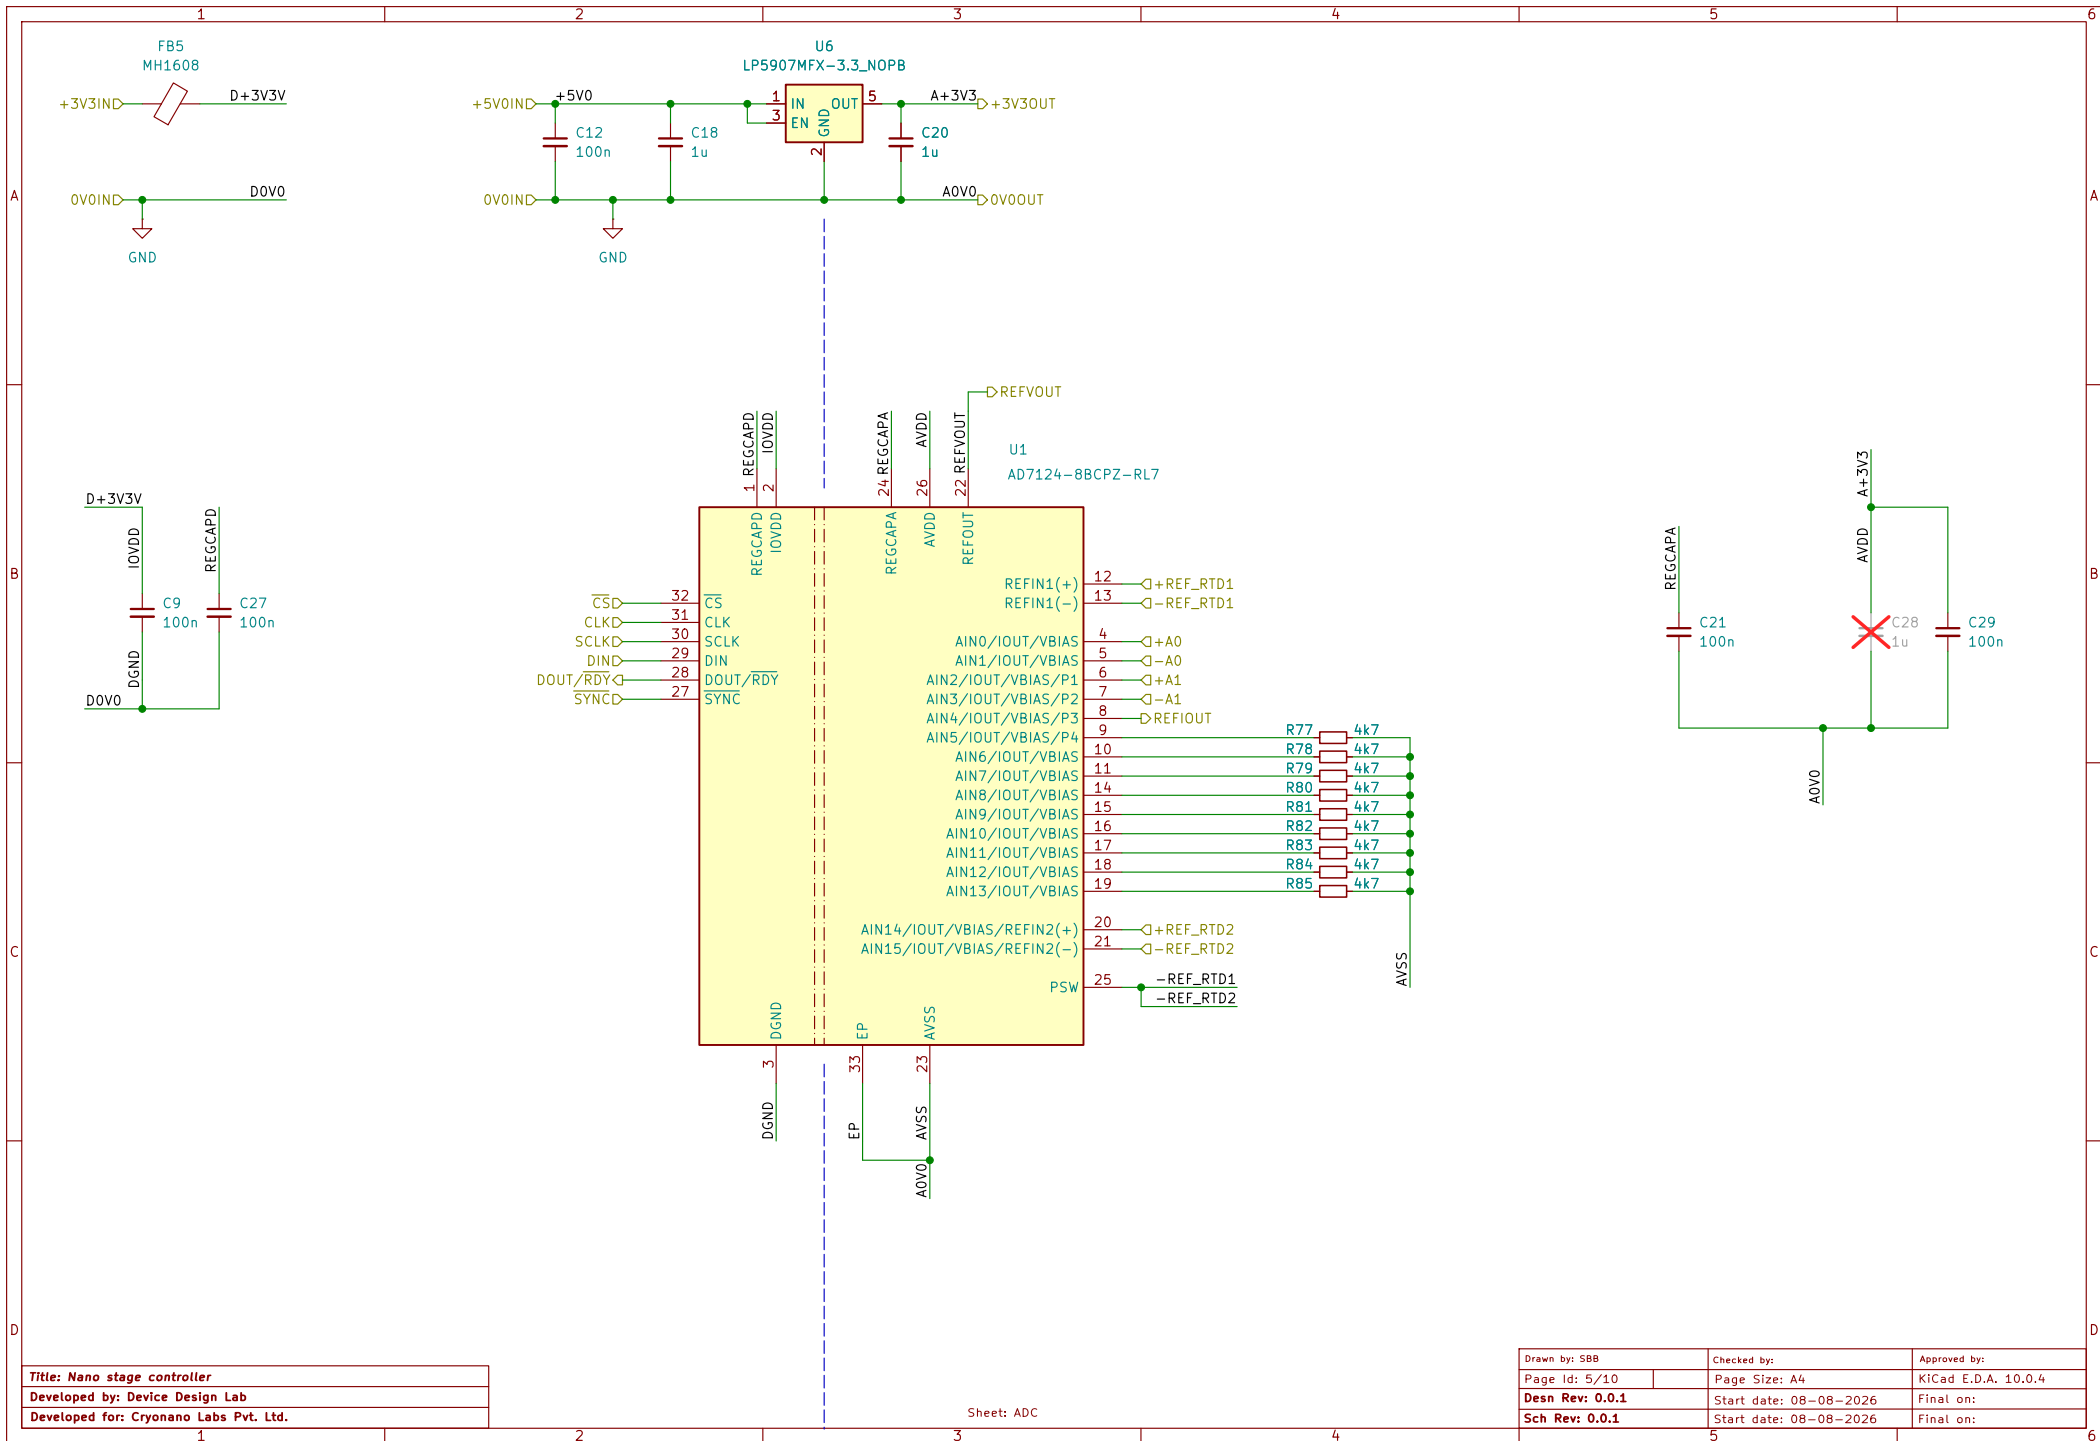


EXCITATIOND— EXCITATION
REF_RET— REF_RET

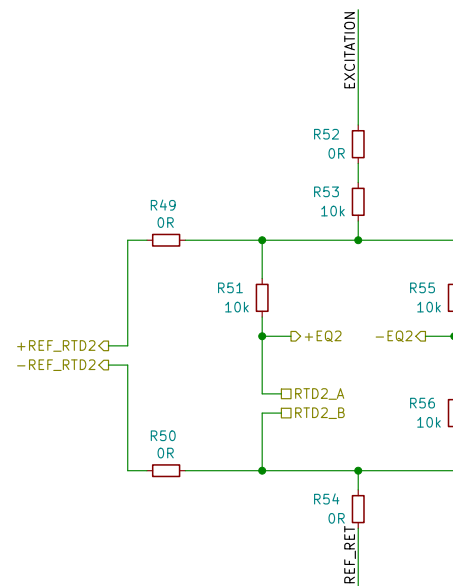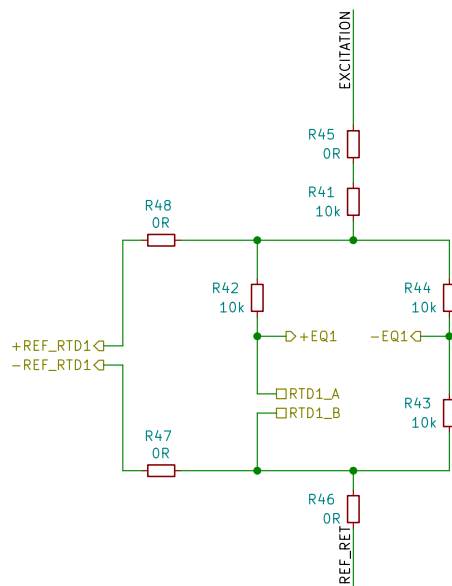


Title: Nano stage controller
Developed by: Device Design Lab
Developed for: Cryonano Labs Pvt. Ltd.

Sheet: Interface

Drawn by: SBB	Checked by:	Approved by:
Page Id: 6/10	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on:

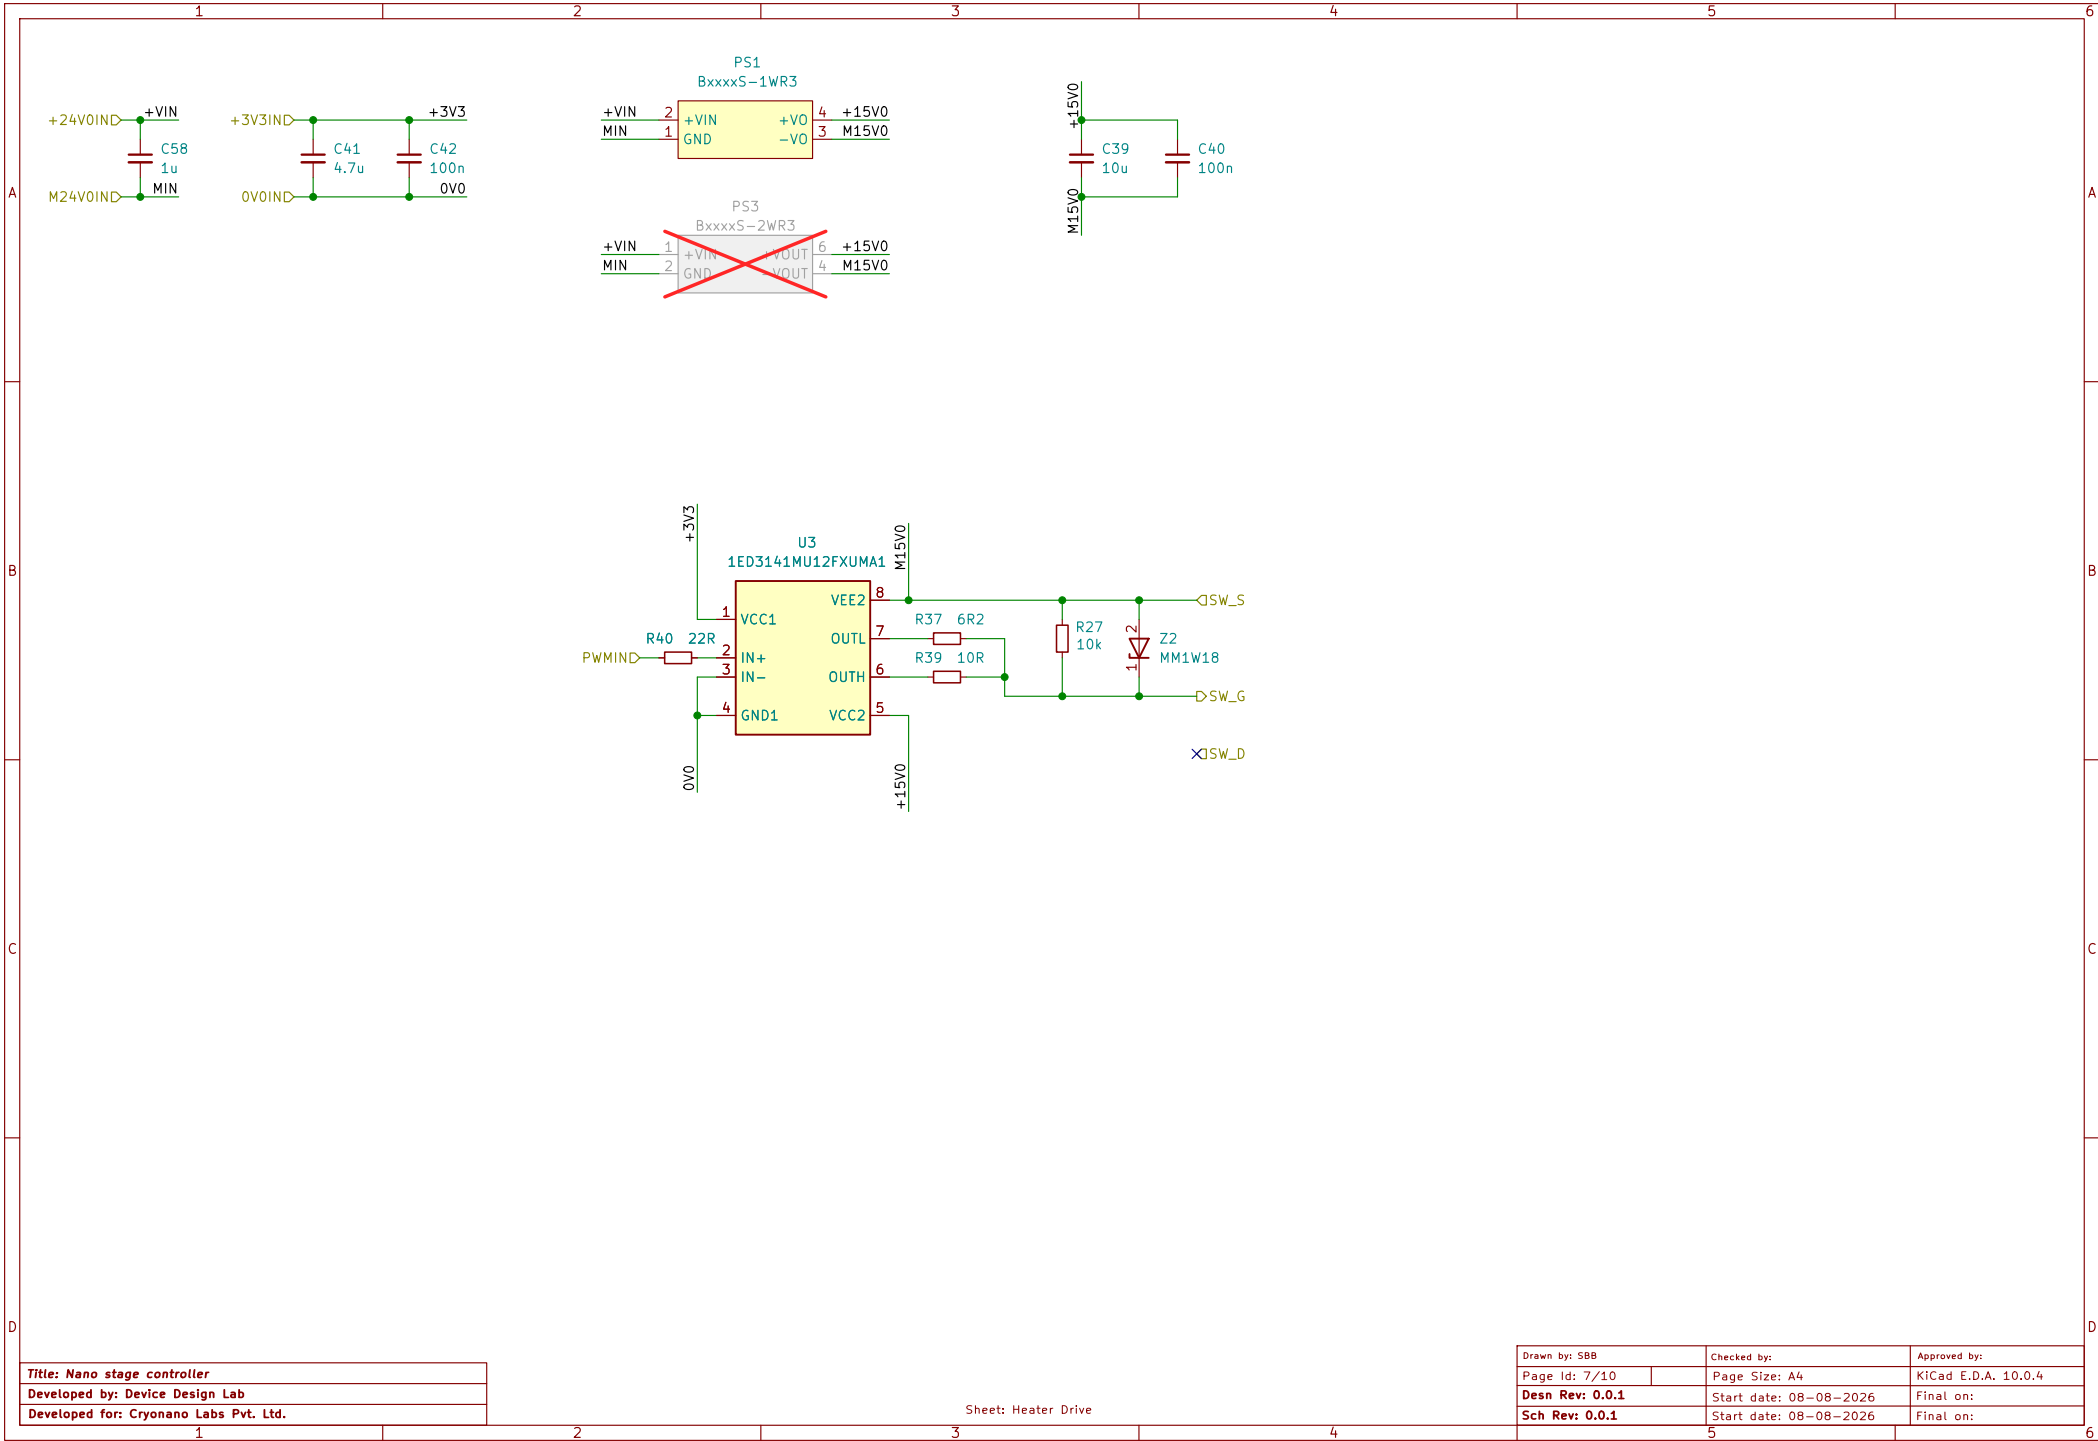

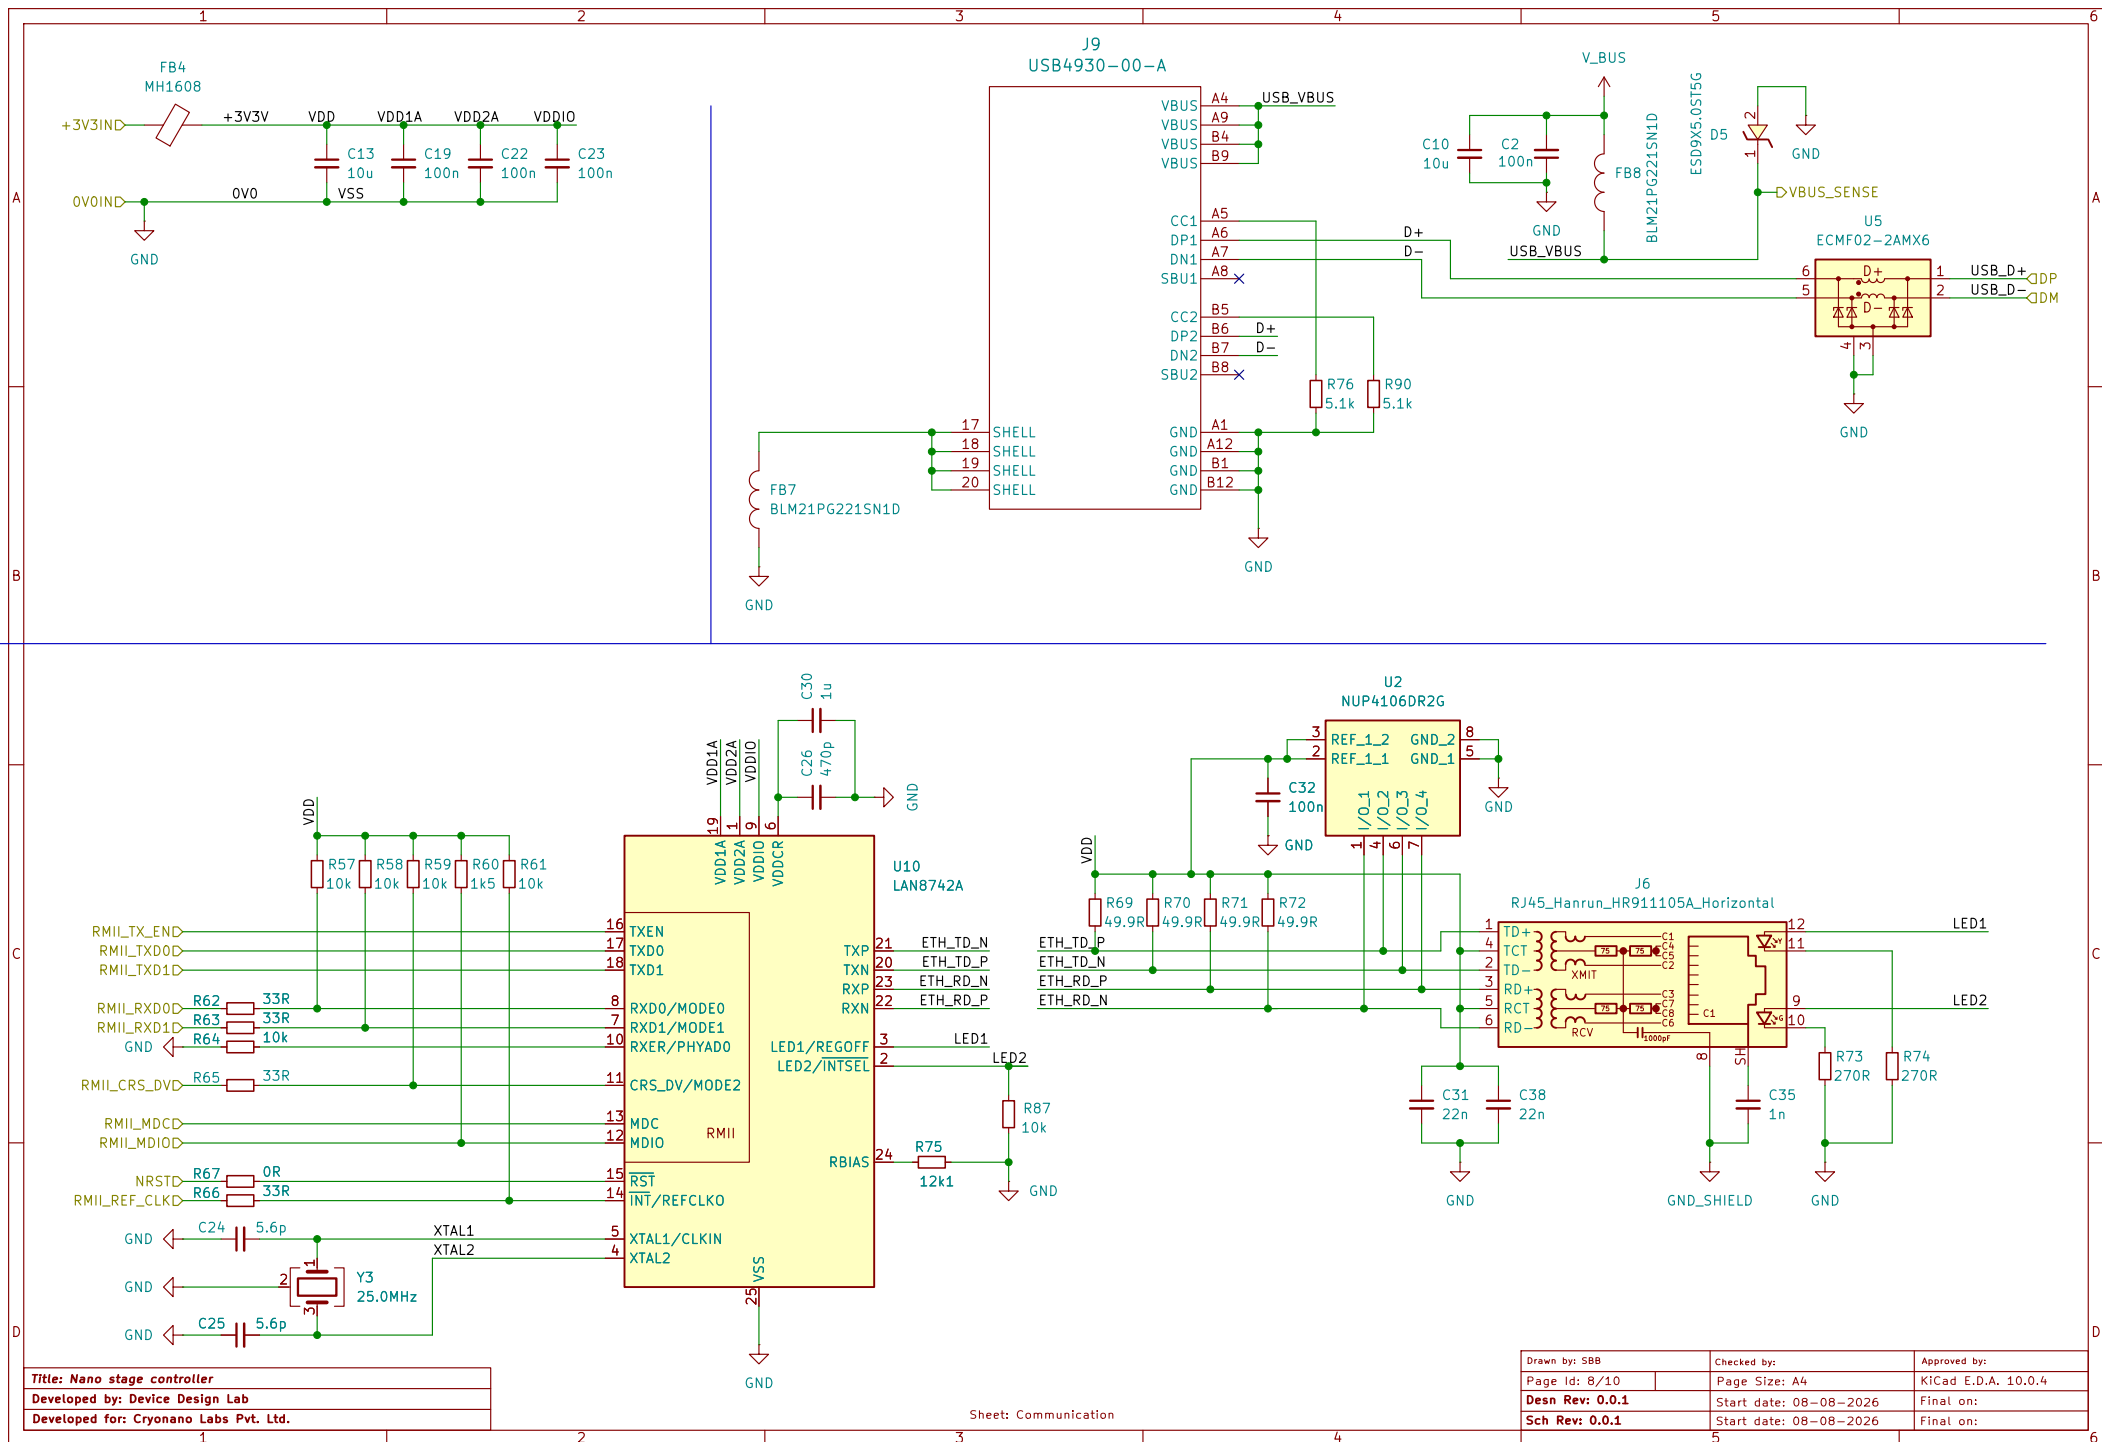

Title: Nano stage controller
 Developed by: Device Design Lab
 Developed for: Cryonano Labs Pvt. Ltd.

Sheet: Communication

Drawn by: SBB	Checked by:	Approved by:
Page Id: 8/10	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on: