



Title: Schematic for heater control and temperature monitoring of nano-stage





Brief:
Two bridges can be controlled independently by the Microcontroller.
Two RTD interface is implemented to measure temperature using Wheatstone bridge-balancing principle.
Bridge resistances shall be adjusted according to the application requirement.

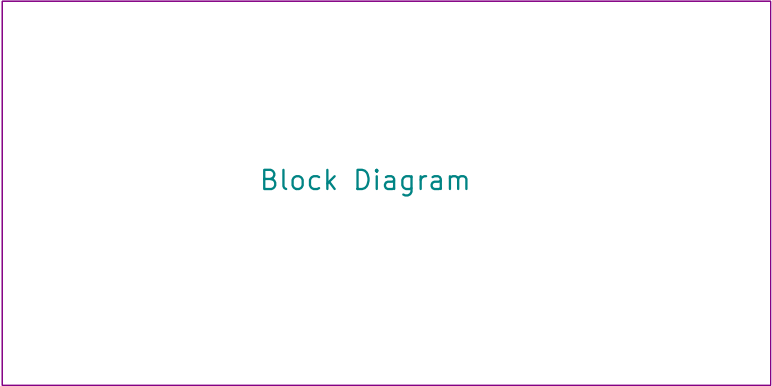

Title: Nano stage controller
Developed by: Device Design Lab
Developed for: Cryonano Labs Pvt. Ltd.


Drawn by: SBB	Checked by:	Approved by:
Page Id: 1/8	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on:

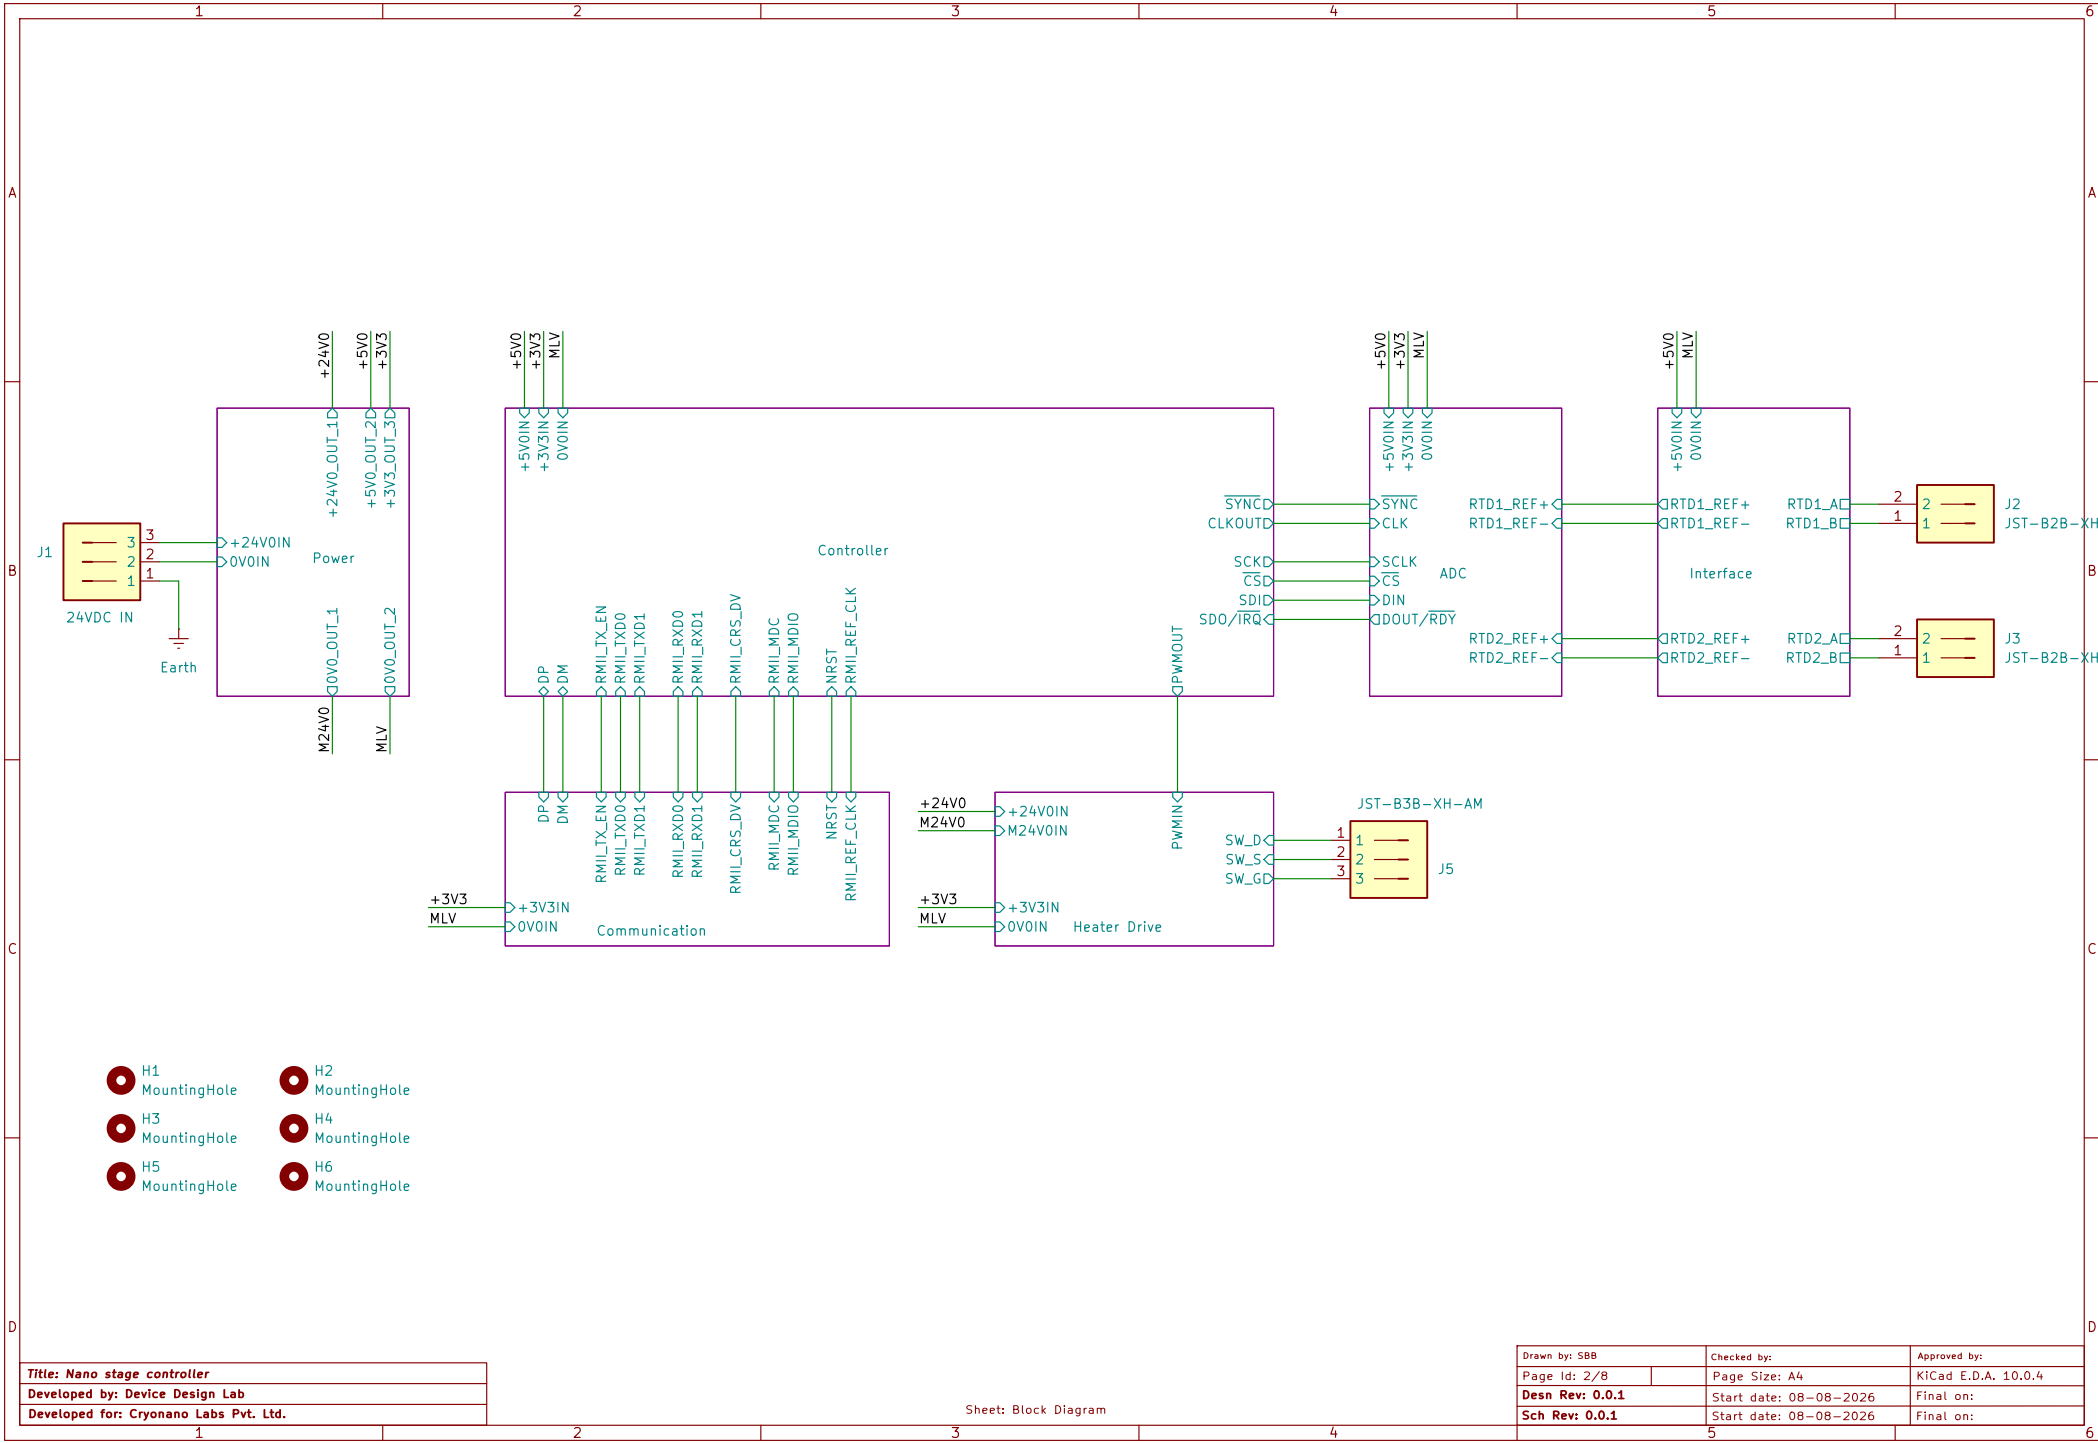

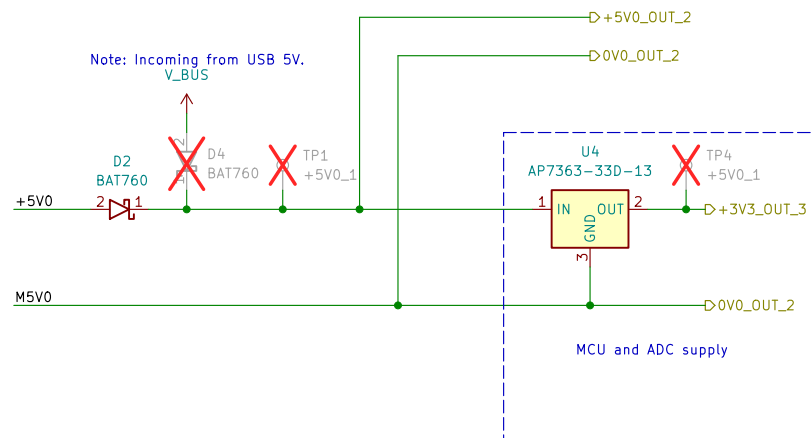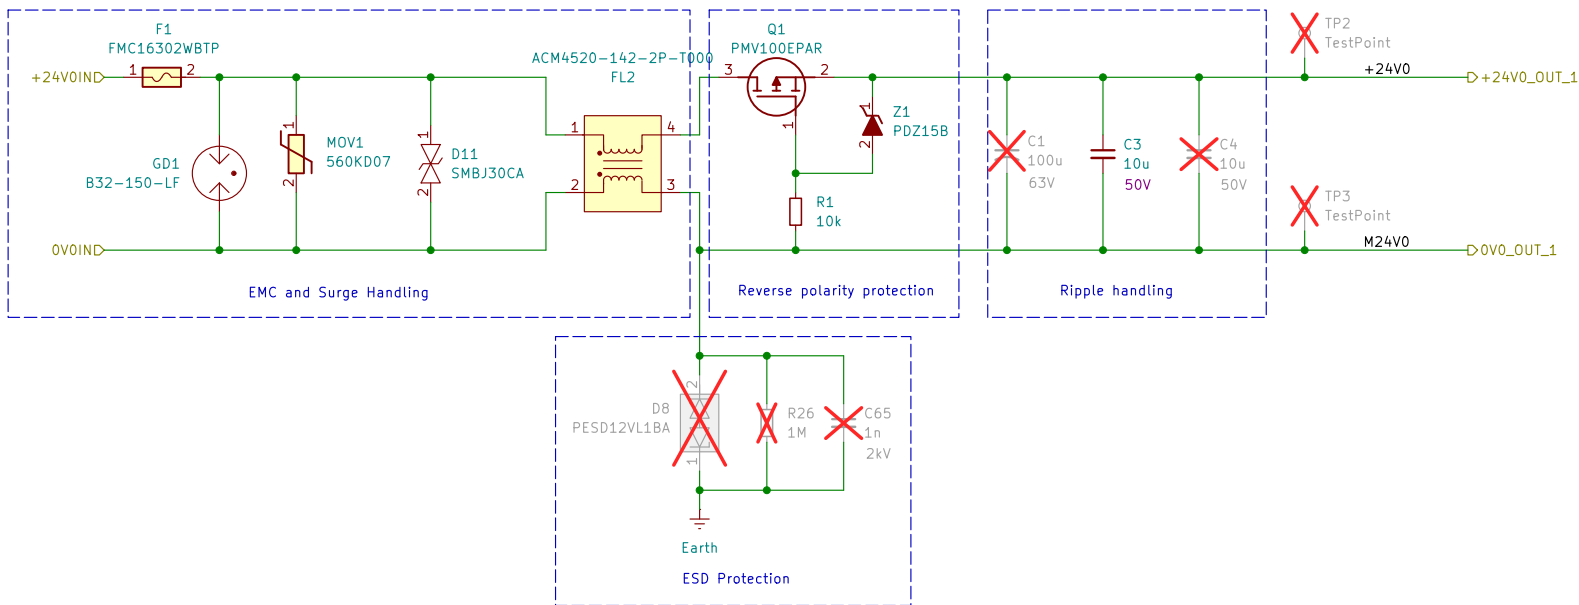








Drawn by: SBB		Checked by:	Approved by:
Page Id: 4/8		Page Size: A4	KiCad E.D.A. 10.0.4
Desn Rev: 0.0.1		Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1		Start date: 08-08-2026	Final on:

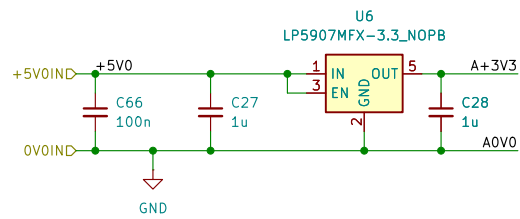[illegible]

Drawn by: SBB		Checked by:	Approved by:
Page Id: 5/8		Page Size: A4	KiCad E.D.A. 10.0.4
Desn Rev: 0.0.1		Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1		Start date: 08-08-2026	Final on:




Power conditioning.

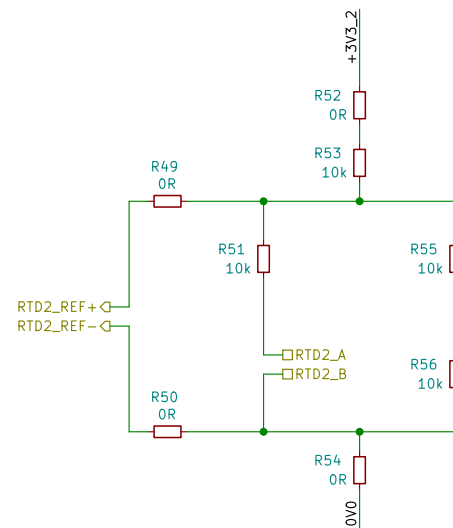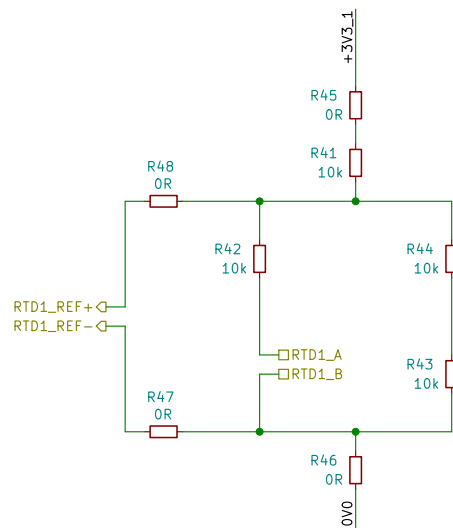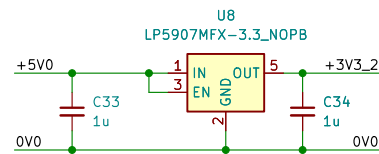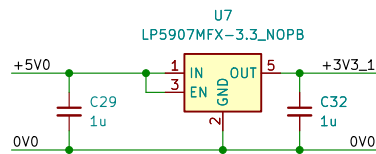


Title: Nano stage controller
Developed by: Device Design Lab
Developed for: Cryonano Labs Pvt. Ltd.

Sheet: Interface

Drawn by: SBB	Checked by:	Approved by:
Page Id: 6/8	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on:

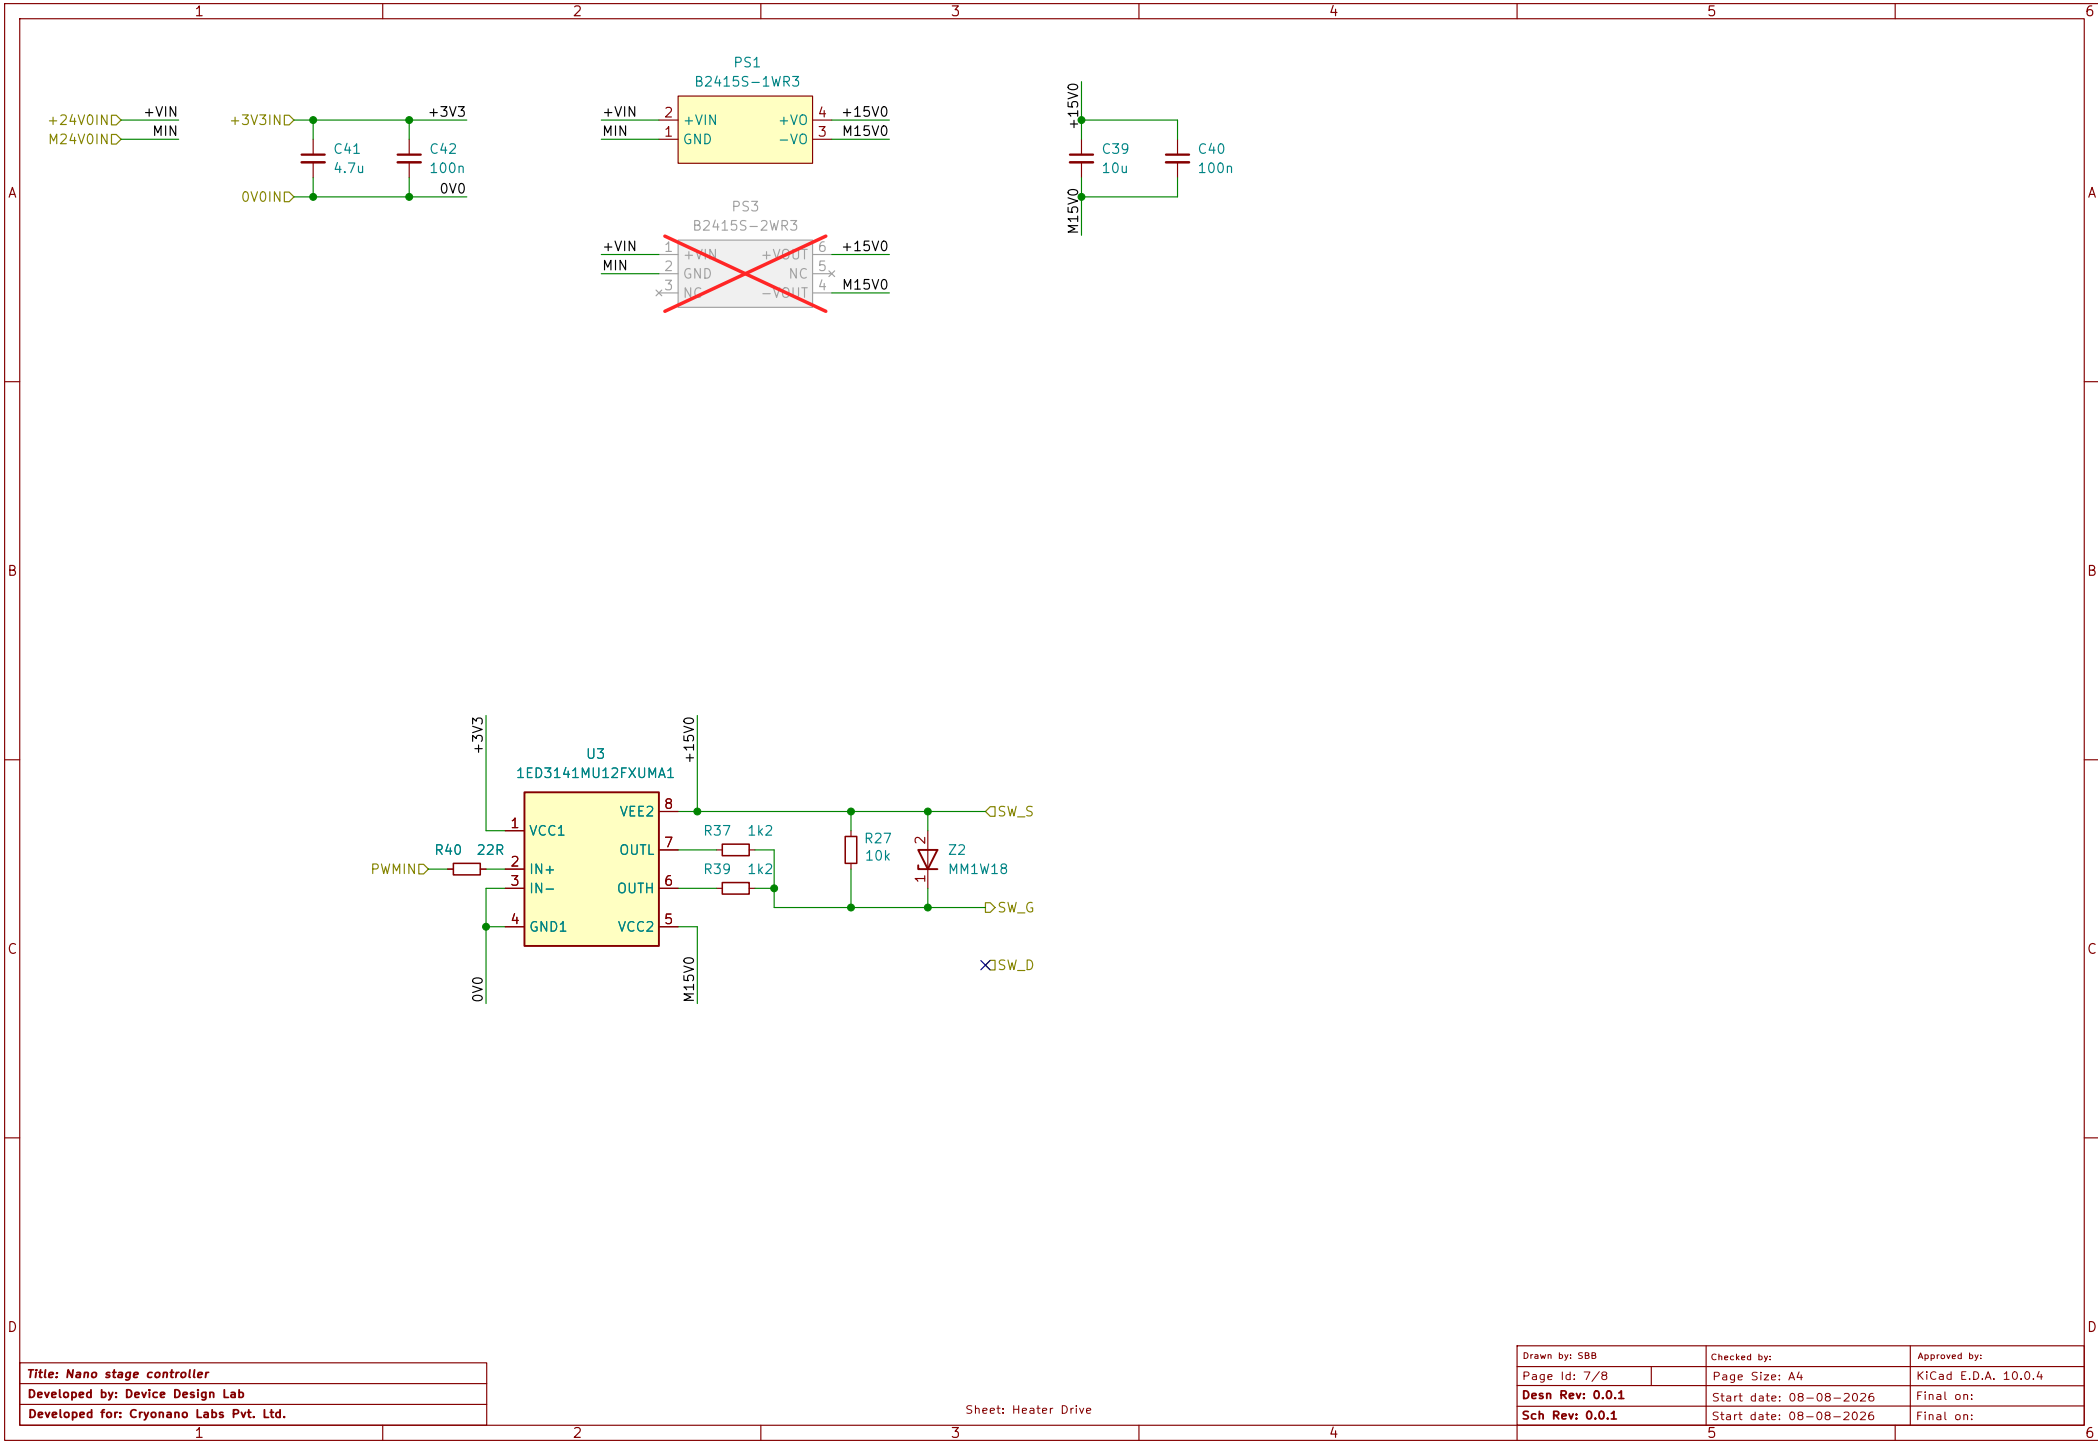

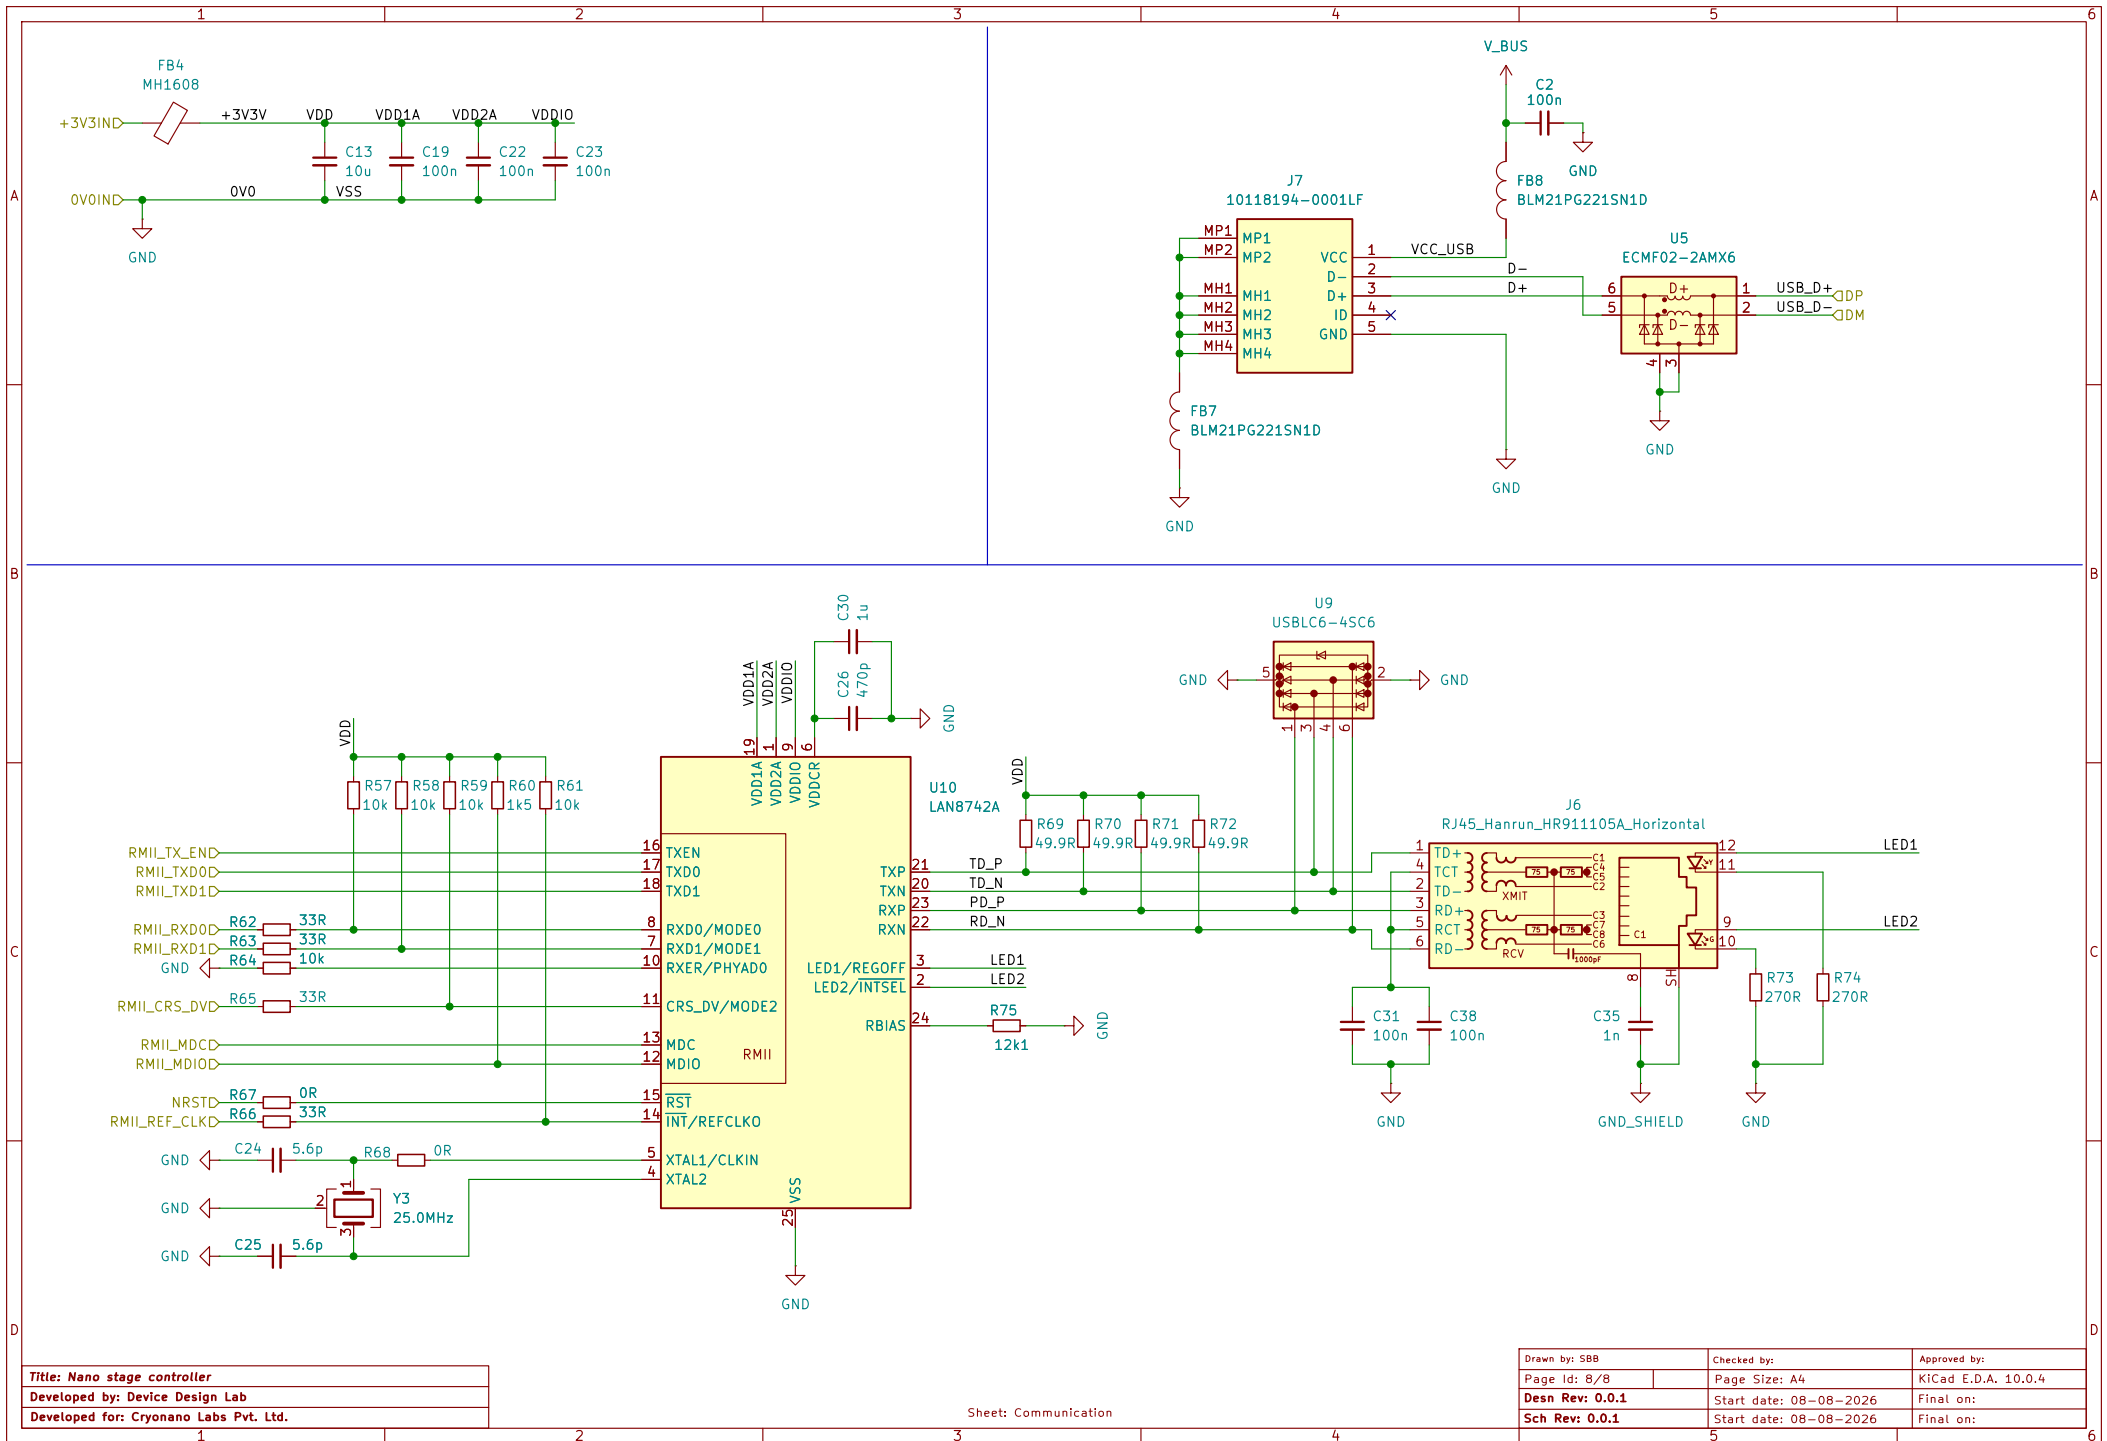

Title: Nano stage controller
 Developed by: Device Design Lab
 Developed for: Cryonano Labs Pvt. Ltd.

Sheet: Communication

Drawn by: SBB	Checked by:	Approved by:
Page Id: 8/8	Page Size: A4	KICad E.D.A. 10.0.4
Desn Rev: 0.0.1	Start date: 08-08-2026	Final on:
Sch Rev: 0.0.1	Start date: 08-08-2026	Final on: