

RECESSED DOWNLIGHT

DLR Canless Recessed Downlight


Clean, even light washes down from the DLR Recessed Downlight while the fixture all but disappears into the ceiling. Its low-profile canless trim sits flush against the surface, and field-selectable color temperature lets one SKU cover multiple spec requirements on a single job — cutting stocking complexity for the contractor. Three apertures (4, 6, 8 in.) drop into new construction or remodel work with an integrated junction box, no separate housing to buy. Architectural downlight that lets the room, not the fixture, hold the eye.

FINISH OPTIONS

White WH



PRODUCT	DLR Canless Recessed Downlight
LOCATION	—
DATE	—
PART #	DLR4-9W-5CCT-DV1-W-F-WH
NOTES	—

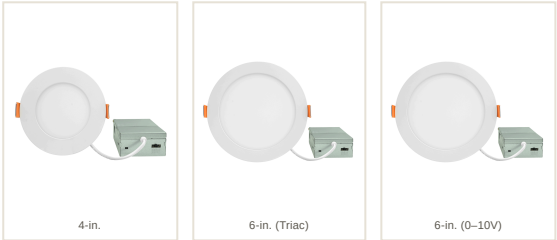

PRODUCT DETAILS

FAMILY
DLR

PRODUCT TYPE
Integrated-LED Recessed Downlight

MATERIAL
Aluminum · PC lens (White)

MOUNTING
Recessed · canless (integrated J-box)

LOCATION RATING
Damp

CERTIFICATIONS
ETL Listed

LIGHT SOURCE (LED)

LIGHT SOURCE
Integrated LED

CCT
Selectable 2700–5000K (5CCT)

CRI
80 CRI

DIMMABLE
Yes

INPUT VOLTAGE
120V

INSTALLATION

INSTALLATION
Recessed · canless (integrated J-box)

FIELD ADJUSTABLE
Field-selectable CCT switch

SIZES & ORDERING

	SIZE	DIAMETER	LUMENS	WATTAGE	SKU	PART #
	4-in.	4.9"	950 lm	9W	3210002	DLR4-9W-5CCT-DV1-W-F-WH
	6-in. (Triac)	6.7"	1,200 lm	12W	3210001	DLR6-12W-5CCT-DV1-W-F-WH
	6-in. (0–10V)	6.7"	1,200 lm	12W	3210004	DLR6-12W-CCT-DV1-NA-F-WH
	8-in.	8.8"	1,875 lm	18W	3210003	DLR8-18W-5CCT-DV1-W-F-WH

All dimensions are nominal and in inches unless noted. Specifications and finishes subject to change without notice. © 2026 Eran Group.