RING STIFFNESS TESTER

DESCRIPTION

The testing machines is designed to determine the ring stiffness, ring fl exibility of thermoplastic pipes. Both feature large compression plates which allow performing the test on the respective diameter range and on pipes with lengths of up to one meter.

A PC based operational software enables clear representation of the machine and contributes to the usability. Different operational modes allow to either apply a constant compression to the sample or to continuously move the compression plates towards each other with constant speed. In both cases the applied or resulting forces and distances are recorded and the respective graphs are produced. Additionally the deflection of the outer or inner diameter of the pipe can be measured and recorded by a specific measuring system.

Accessories

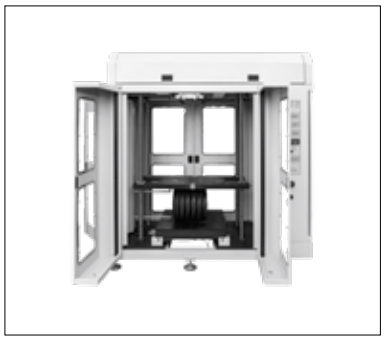

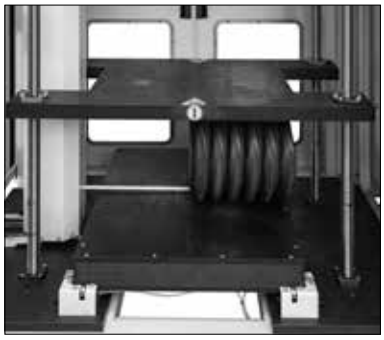

Simple and safe operation

- Automatic processing of test scenario
- PC-based control software enables easy operation and a clearly represented visualization

Reliable test results

- Especially designed to determine the ring stiffness, ring fl exibility
- Continuous measuring and recording of the pipe's deformation on either outer or inner wall
- Continuous measuring and recording of compressive force

RING STIFFNESS TESTER

Standards	
ISO 9967	DIN 16961
ISO 9969	ASTM D 2412
ISO 13968	

Versions

		T031000V1P
Max. test force	kN	30
Max. outside diameter	mm	1000
Preload		Defi nable up to max. force
Accuracy		±1 % of measurement 0.40 up to 30 kN
Accuracy of measuring of deformation of the internal diameter		1 % of modifi cation or 0.1 mm (max. value is valid)
Measuring range of distance measurement	mm	Min. 100 - max. 1000
Travel distance	mm	930
Extensometer		Integrated
PC based software		●
CE conformity		●
Permissible ambient temperature	°C	+5 to +30
Permissible relative humidity	mm	Max. 70%, non-condensing
Width	mm	1900
Depth	mm	1140
Height	mm	2030
Width Extensometer	mm	2200 (Extended)
Weight (incl. Extensometer)	t	ca. 1.75
Voltage data		**3 ph 380/400 VAC 230/400 V, 50/60 Hz (other voltages on request)**

● included ○ available / optional □ eligible - not available

POLİNAR PLASTİK MAKİNE ve KALIP SANAYİ
TİCARET LİMİTED ŞİRKETİ
İkitelli O.S.B Eskoop San. Sit. D Blok
No: 34 Başakşehir / İSTANBUL - TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.polinar.com.tr

PTE (POLİNAR TEST EQUIPMENT)
İkitelli O.S.B. Eskoop San. Sit.
D Blok No.34 Başakşehir
İstanbul / TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

www.pte.com.tr

POLINAR GmbH
THE ICON VIENNA, Tower 24
Wiedner Gürtel 13 1100
Vienna AUSTRIA

Phone : +43 (0) 1 253535 4044
Fax : +43 (0) 1 253535 4044
Mobile : +43 676 5983869
E-Mail : office@polinar.at

www.polinar.at