# TEST TANKS for PIPE TESTING

## DESCRIPTION

The internal pressure creep test is a test procedure for determining the strength of thermoplastic pipes. The samples are subjected to a constant hydrostatic internal pressure at a constant ambient temperature either for a specified period or until they fail. The test duration is subject to the tension generated by the internal pressure and the temperature. The test tanks are specially designed for testing thermoplastic pipes and fittings. The high reliability, durability of the materials used and the constant temperatures in the test tank with respect to both volume and time provide particularly reliable test conditions. The efficient use of energy with low servicing and maintenance costs guarantee efficient long term operation. There are a wide range of tank dimensions and connection options, enabling the tanks to be flexibly adapted to various operating conditions.

## Accessories

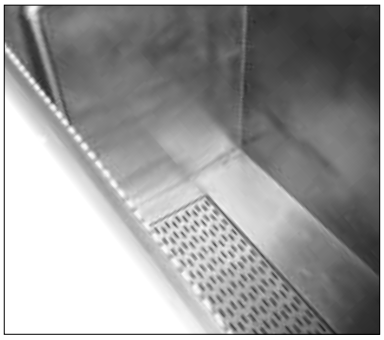

Simple and safe operation

- Air operated lid

Reliable test results

- Constant test temperatures thanks to highly efficient water circulation and precise temperature control in the inner tank

Lasting efficiency

- High quality stainless steel test tank (AISI 304)
- Double insulation of the basic tank and insulated lid for minimum energy loss

State of the art technology

- Integrated monitoring and control of test temperature.

# TEST TANKS for PIPE TESTING

| Standards |
|---|
| ISO 1167 |
| ASTM D 1598 |
| ASTM D 1599 |

## Versions

| | | T071800V1P | T071800V2P | T071800V3P | T071800V4P | T071800V5P |
|---|---|---|---|---|---|---|
| Width (internal/external) | mm | 750/900 | 1000/1500 | 1200/1400 | 1500/1800 | 1500/1850 |
| Length (internal/external) | mm | 1000/1400 | 1500/2000 | 2000/2800 | 2500/3300 | 3000/4100 |
| Height (internal/external) | mm | 900/1300 | 1300/1900 | 1200/1900 | 1500/2200 | 2000/2800 |
| Height open | mm | 2000 | 2500 | 2300 | 2800 | 3500 |
| Number of manifold slots | | 4+4+2 | 4+4+2 | 4+4+2 | 4+4+2 | 4+4+2 |
| Number of suspension rails (included) | | - | 2 | 2 | 2 | 2 |
| Heating power | kW | 15 | 15 | 45 | 60 | 60 |
| Inner tank material | | AISI 304 | | | | |
| All parts coming into contact with water stainless | | ● | | | | |
| Water temperature | °C | Min. ambient temperature + 10/max. 95 | | | | |
| Water temperature adjustable in increments of | °C | 0.1 | | | | |
| Temperature control with regulating accuracy | °C | ±0.5 | | | | |
| Circulation system | | ● | | | | |
| CE conformity | | ● | | | | |
| Voltage data | | **230/400 V, 50/60 Hz (other voltages on request)** | | | | |

● included ○ available / optional □ eligible - not available

POLİNAR PLASTİK MAKİNE ve KALIP SANAYİ
TİCARET LİMİTED ŞİRKETİ
İkitelli O.S.B Eskoop San. Sit. D Blok
No: 34 Başakşehir / İSTANBUL - TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

**www.polinar.com.tr**

PTE (POLİNAR TEST EQUIPMENT)
İkitelli O.S.B. Eskoop San. Sit.
D Blok No.34 Başakşehir
İstanbul / TURKEY

Phone : +90 212 549 88 20 – 21
Fax : +90 212 549 88 19
E-Mail : info@polinar.com.tr

**www.pte.com.tr**

POLINAR GmbH
THE ICON VIENNA, Tower 24
Wiedner Gürtel 13 1100
Vienna AUSTRIA

Phone : +43 (0) 1 253535 4044
Fax : +43 (0) 1 253535 4044
Mobile : +43 676 5983869
E-Mail : office@polinar.at

**www.polinar.at**