

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/21/08'	~	LJC 10/21/08'
B	端子尾加长	YCH 12/23/11'	~	

# NOTES:



## 1. SPECIFICATIONS

- CONTACT RESISTANCE:50mΩ Max.
- INSULATOR RESISTANCE:100MΩ Min.
- DIELECTRIC STRENGTH:100VAC FOR 1 Minute.
- DURABILITY:5000





## 2. PRODUCT NUMBER CODE:



DS1104 - X X X X X X

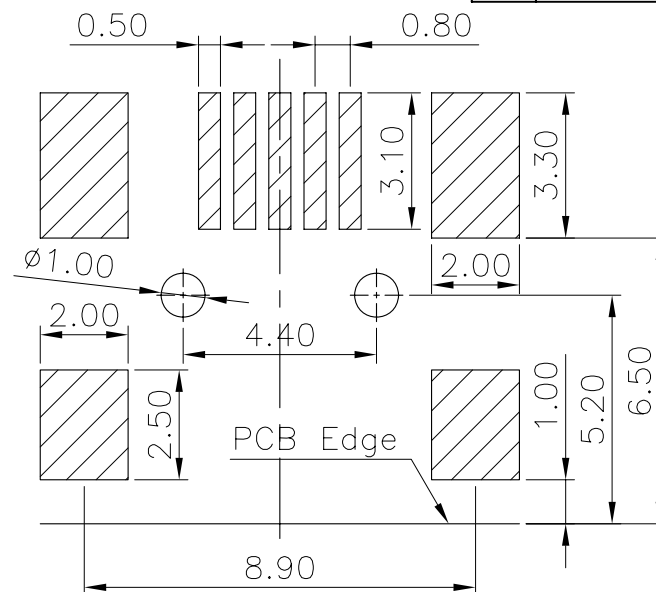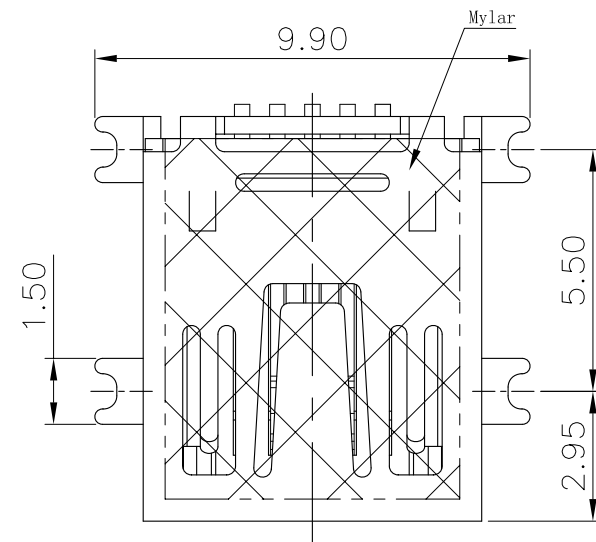- POST SUPPORT
- S:W/ POST
- X:W/O POST
- PACKING TYPE
- R:TAPE ON REEL
- B:TUBE
- MYLAR SUPPORT
- S:W/ MYLAR
- X:W/O MYLAR
- CONTACT PLATING
- 0: SELECTIVE GOLD FLASH
- C: SELECTIVE 3u" GOLD
- SHELL PLATING
- N: NICKEL
- 6: TIN
- 8: FULL GOLD
- COLOR OF HOUSING
- B: BLACK

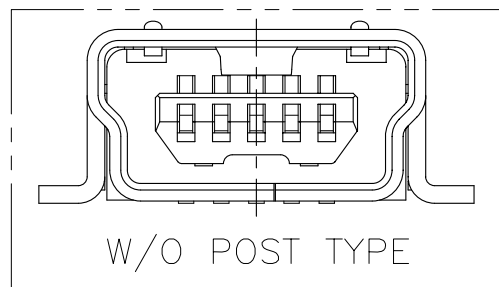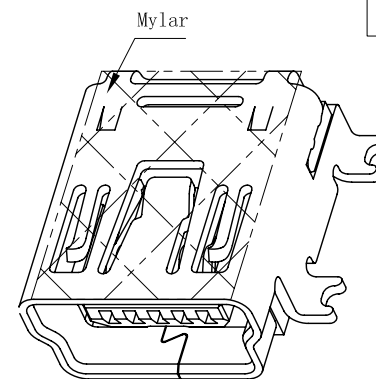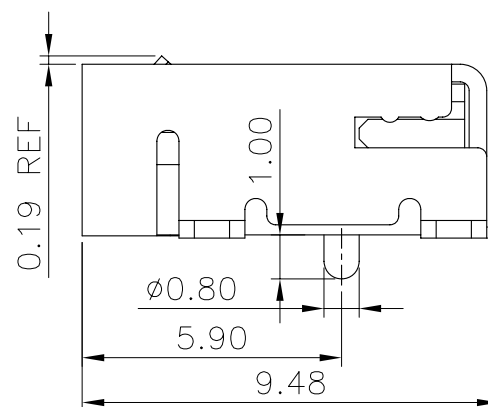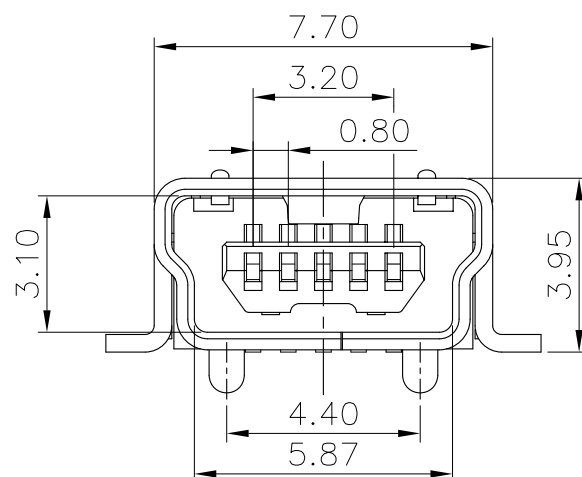

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MINI USB	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1104 SERIES
.XX	±0.25	.XX	±2°	<div><div>晨翔电子有限公司</div><div>CONNFLY CONNPLY ELECTRONIC CO. LTD</div></div>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1104-XXXXXX-B					