



AQUATIC

ELEKT. MAK. OTM. SAVUNMA SAN. TİC. LTD. ŞTİ

UNDERWATER LIGHTING

FLUSH HULL-MOUNT PRODUCT FAMILY

30 AQUATIC underwater LED luminaires for mega yachts, with wide flanges, screw mounting to the hull surface and pressure-body penetrations.

YOUR EYES UNDERWATER

CONCEPT PRODUCT CATALOG | 2026

Design targets will be finalized through prototype and validation testing.



More than a luminaire: a hull system

Every model has been redesigned with a wide load-bearing flange independent of the optical glass. Countersunk fasteners remain outside the sealing line; the rear pressure body passes through the hull and the cable connection is never exposed to seawater.

01

Wide front flange

Distributes the load over the hull surface and leaves sufficient sealing area around the glass.

02

Hydrodynamic outer edge

Low-profile, chamfered form that can be adapted to a fairing pad.

03


Dual FKM O-rings

Two independent sealing barriers for the optical glass and pressure body.

04

In-hull cable entry

Marine-grade PUR cable and pressure gland are serviced without leaving cable exposed outside.

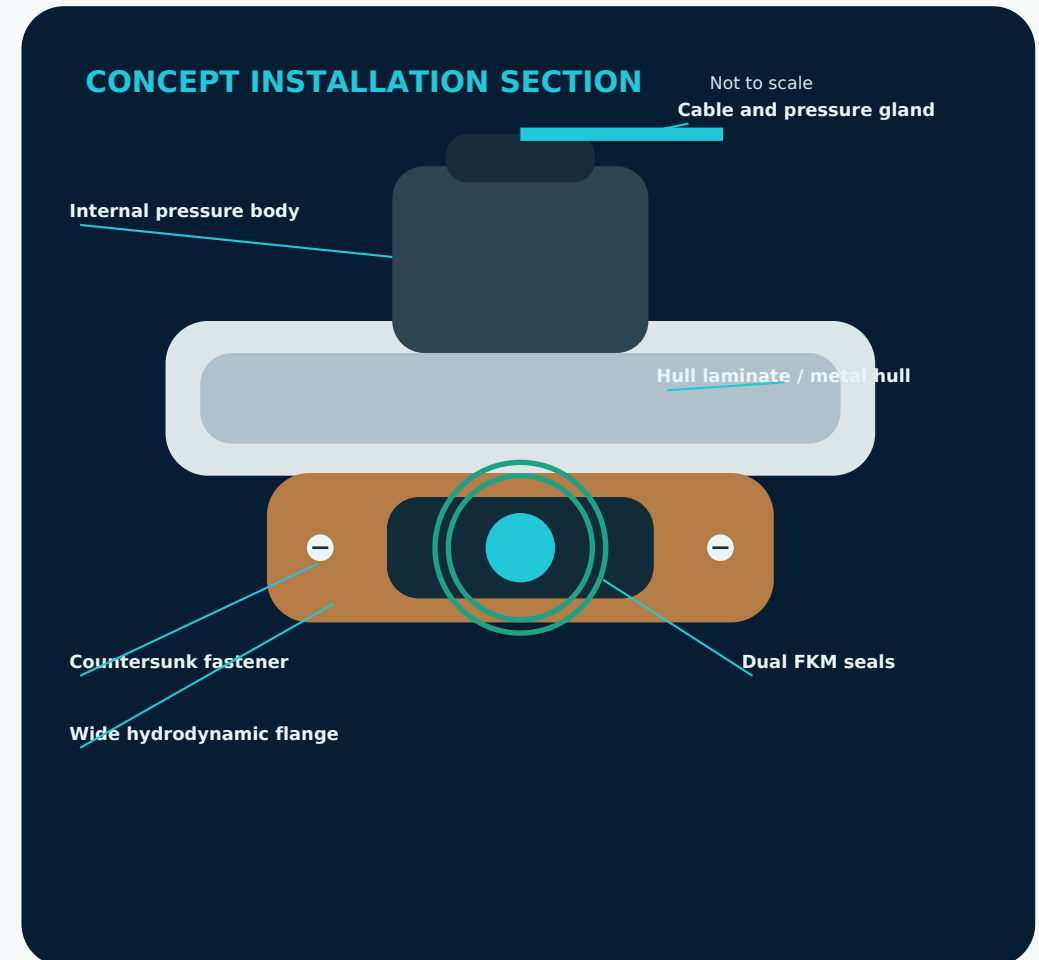



AQ-UWL-1004 COMPACT

Round compact

4 x high-power LED | 24 W



AQ-UWL-2507 BRONZE

Classic round

7 x RGBW LED | 56 W



AQ-UWL-4012 PRO

Professional round


12 x high-power LED | 72 W



AQ-UWL-6516 WIDE

Wide-angle round


16 x RGBW LED | 96 W



AQ-UWL-9028 SIGNATURE

Rectangular hybrid

28 x RGBW LED | 168 W



AQ-UWL-0501 NANO

Single-LED compact

1 x high-power LED | 8 W



AQ-UWL-1806 SLIM

Linear capsule

6 x RGBW LED | 36 W



AQ-UWL-3009 VECTOR

Hexagonal worklight

9 x high-power LED | 63 W



AQ-UWL-7018 DEEP

Deep-water vertical oval

18 x high-power LED | 126 W



AQ-UWL-15036 PANORAMA

Curved wide panel

36 x RGBW LED | 216 W



AQ-UWL-T0303 TRIO

Rounded triangle

3 x high-power LED | 18 W



AQ-UWL-T1206 DELTA

Inverted triangle

6 x high-power LED | 36 W



AQ-UWL-T2510 TRIDENT

Curved triangle


10 x RGBW LED | 60 W



AQ-UWL-T4515 RAZOR

Sharp-edged triangular worklight

15 x high-power LED | 105 W



AQ-UWL-T9828 APEX

Large hybrid triangle

28 x RGBW LED | 196 W



UNDERWATER

COMPACT

Bow shoulder, stern corners and compact hull areas

Housing	AISI 316L stainless steel
Light source	4 x high-power LED
Power / supply	24 W / 24 VDC
Luminous flux	1.800 lm target
Optics	30 / 60 degrees
Outer flange	Ø145 mm
Hull cutout	Ø92 mm
Recess depth	68 mm
Fastening	6 x M5 countersunk
Lens	10 mm borosilicate
Operating depth	30 m target
Control	On/off / PWM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

BRONZE

Mega-yacht stern and architectural hull-side lighting

Housing	C95800 nickel-aluminium bronze
Light source	7 x RGBW LED
Power / supply	56 W / 24 VDC
Luminous flux	4.200 lm target
Optics	25 / 45 / 60 degrees
Outer flange	Ø185 mm
Hull cutout	Ø120 mm
Recess depth	88 mm
Fastening	8 x M6 countersunk
Lens	12 mm borosilicate
Operating depth	50 m target
Control	PWM / DMX512 option

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

PRO

Mid-hull, seabed illumination and general underwater visibility

Housing	AISI 316L stainless steel
Light source	12 x high-power LED
Power / supply	72 W / 24 VDC
Luminous flux	6.000 lm target
Optics	20 / 40 / 60 degrees
Outer flange	Ø220 mm
Hull cutout	Ø150 mm
Recess depth	95 mm
Fastening	8 x M6 countersunk
Lens	12 mm borosilicate
Operating depth	75 m target
Control	PWM / DMX512

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

WIDE

Under swim platform and wide-angle stern illumination

Housing	C95800 nickel-aluminium bronze
Light source	16 x RGBW LED
Power / supply	96 W / 48 VDC
Luminous flux	8.200 lm target
Optics	60 / 90 degrees
Outer flange	Ø270 mm
Hull cutout	Ø190 mm
Recess depth	100 mm
Fastening	10 x M8 countersunk
Lens	15 mm borosilicate
Operating depth	75 m target
Control	DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

SIGNATURE

Mega-yacht transom and high-output panoramic illumination

Housing 316L + C95800 hybrid

Light source 28 x RGBW LED

Power / supply 168 W / 48 VDC

Luminous flux 14.500 lm target

Optics 40 / 60 / 90 degrees

Outer flange 380 x 270 mm

Hull cutout 300 x 190 mm

Recess depth 105 mm

Fastening 12 x M8 countersunk

Lens 15 mm borosilicate

Operating depth 50 m target

Control DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

NANO

Accent lighting, beneath steps and narrow hull zones

Housing	AISI 316L stainless steel
Light source	1 x high-power LED
Power / supply	8 W / 24 VDC
Luminous flux	600 lm target
Optics	20 / 40 degrees
Outer flange	Ø95 mm
Hull cutout	Ø48 mm
Recess depth	55 mm
Fastening	4 x M5 countersunk
Lens	8 mm borosilicate
Operating depth	20 m target
Control	On/off / PWM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

SLIM

Hull chine, stern line and linear light curtain

Housing	C95800 nickel-aluminium bronze
Light source	6 x RGBW LED
Power / supply	36 W / 24 VDC
Luminous flux	2.800 lm target
Optics	30 x 80 degrees
Outer flange	310 x 105 mm
Hull cutout	240 x 45 mm
Recess depth	70 mm
Fastening	8 x M6 countersunk
Lens	10 mm borosilicate
Operating depth	30 m target
Control	PWM / DMX512 option

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

VECTOR

Stabilizer, propeller and technical inspection lighting

Housing	Super Duplex 2507
Light source	9 x high-power LED
Power / supply	63 W / 24 / 48 VDC
Luminous flux	5.200 lm target
Optics	15 / 30 / 60 degrees
Outer flange	220 mm across flats
Hull cutout	145 mm across flats
Recess depth	100 mm
Fastening	12 x M6 countersunk
Lens	15 mm borosilicate
Operating depth	100 m target
Control	PWM / DMX512

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

DEEP

Deep water, keel underside and long-range beam

Housing	C95800 nickel-aluminium bronze
Light source	18 x high-power LED
Power / supply	126 W / 48 VDC
Luminous flux	10.500 lm target
Optics	15 / 30 degrees
Outer flange	340 x 220 mm
Hull cutout	250 x 130 mm
Recess depth	150 mm
Fastening	12 x M8 countersunk
Lens	20 mm domed glass
Operating depth	150 m target
Control	DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

PANORAMA

Wide transom and high-volume mega-yacht underwater scene

Housing 316L + C95800 hybrid

Light source 36 x RGBW LED

Power / supply 216 W / 48 VDC

Luminous flux 18.000 lm target

Optics 60 / 90 degrees

Outer flange 520 x 360 mm

Hull cutout 420 x 260 mm

Recess depth 120 mm

Fastening 16 x M8 countersunk

Lens 18 mm borosilicate

Operating depth 50 m target

Control DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

TRIO

Stern corners and triple accent light

Housing	C95800 nickel-aluminium bronze
Light source	3 x high-power LED
Power / supply	18 W / 24 VDC
Luminous flux	1.400 lm target
Optics	30 / 60 degrees
Outer flange	150 x 135 mm
Hull cutout	90 x 80 mm
Recess depth	65 mm
Fastening	6 x M5 countersunk
Lens	10 mm borosilicate
Operating depth	30 m target
Control	On/off / PWM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

DELTA

Propeller perimeter and downward light fan

Housing	AISI 316L stainless steel
Light source	6 x high-power LED
Power / supply	36 W / 24 VDC
Luminous flux	3.000 lm target
Optics	30 / 60 degrees
Outer flange	220 x 200 mm
Hull cutout	140 x 125 mm
Recess depth	80 mm
Fastening	9 x M6 countersunk
Lens	12 mm borosilicate
Operating depth	50 m target
Control	PWM / DMX512 option

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

TRIDENT

Architectural RGBW lighting beneath the hull side

Housing	C95800 nickel-aluminium bronze
Light source	10 x RGBW LED
Power / supply	60 W / 24 / 48 VDC
Luminous flux	5.000 lm target
Optics	25 / 40 / 60 degrees
Outer flange	280 x 255 mm
Hull cutout	190 x 170 mm
Recess depth	95 mm
Fastening	9 x M6 countersunk
Lens	15 mm borosilicate
Operating depth	75 m target
Control	DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

RAZOR

Deep-water high-output work lighting

Housing	Super Duplex 2507
Light source	15 x high-power LED
Power / supply	105 W / 48 VDC
Luminous flux	9.000 lm target
Optics	20 / 40 degrees
Outer flange	350 x 315 mm
Hull cutout	240 x 215 mm
Recess depth	125 mm
Fastening	12 x M8 countersunk
Lens	18 mm borosilicate
Operating depth	100 m target
Control	DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.



UNDERWATER

APEX

Flagship light scene at the mega-yacht stern center

Housing	316L + C95800 hybrid
Light source	28 x RGBW LED
Power / supply	196 W / 48 VDC
Luminous flux	16.500 lm target
Optics	40 / 60 / 90 degrees
Outer flange	520 x 460 mm
Hull cutout	390 x 340 mm
Recess depth	135 mm
Fastening	18 x M8 countersunk
Lens	20 mm borosilicate
Operating depth	75 m target
Control	DMX512 / RDM

COMMON CONSTRUCTION

Dual FKM O-rings, in-hull PUR cable, wide flange and no exposed external cable.

One luminaire family, multiple underwater scenes

The AQUATIC product family can be configured in single-color white or RGBW with different beam angles for stern platforms, hull sides, seabed visibility or technical inspection.

**3000 K****Warm white**

Soft, luxurious stern ambience

**5000 K****Neutral white**

High visibility and natural color perception

**6500 K****Cool white**

Technical inspection and long range

**RGBW****Dynamic color**

DMX512 / RDM scene control

Optical options

15-25 degrees**Narrow beam**

Deep water and focused technical lighting

30-45 degrees**Medium beam**

General hull and stern illumination

60-90 degrees**Wide beam**


Platform and panoramic underwater scene

Asimetrik**Linear optic**

Light curtain along the hull chine

One command point, independently operating lighting zones

The AQUATIC control architecture combines commands from the bridge, local panel and yacht automation in an isolated control unit. Each underwater zone is independently protected, dimmed and monitored.

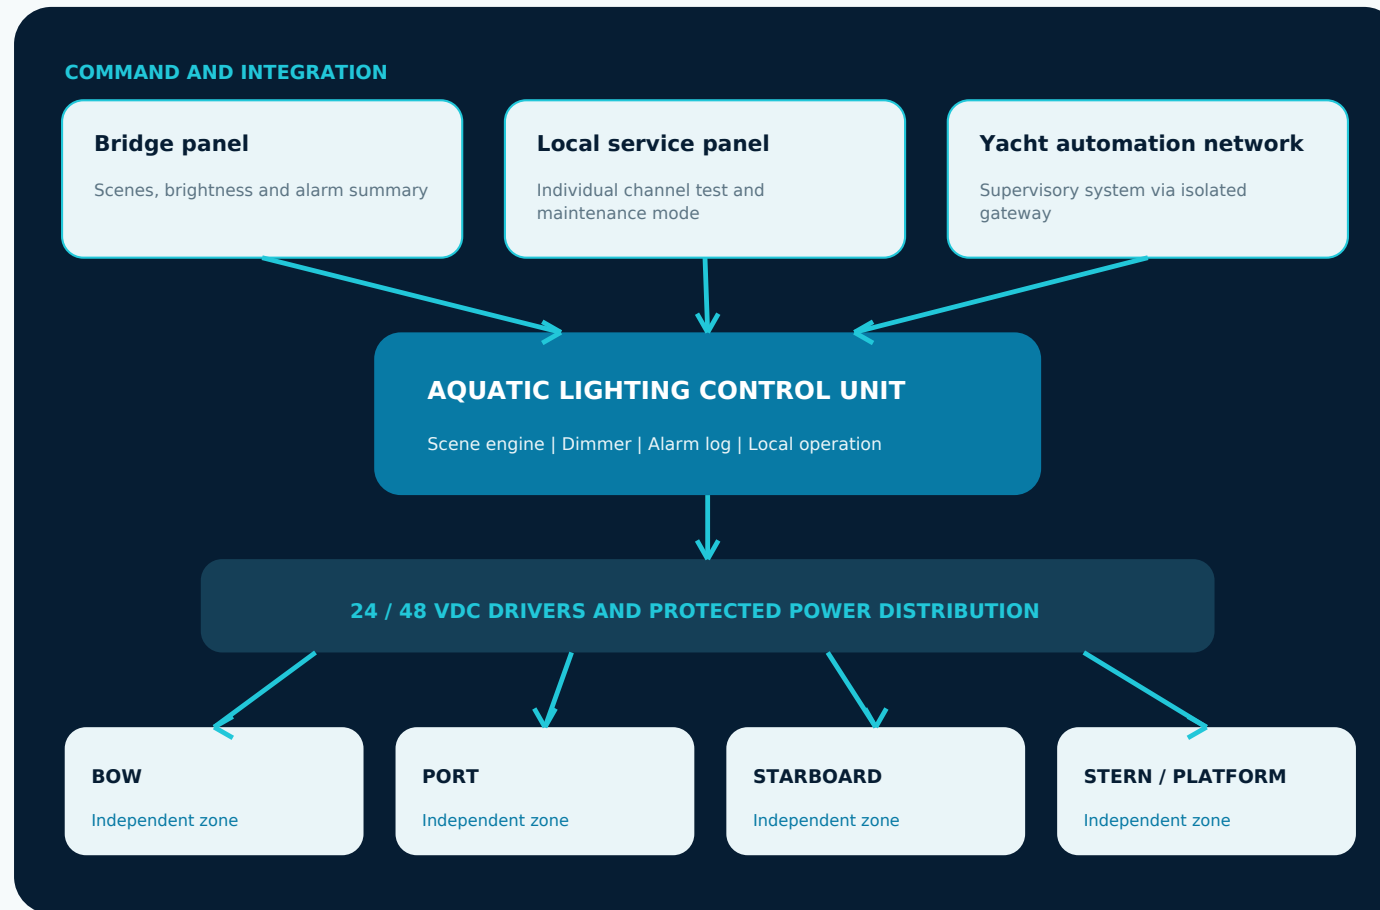

Lighting survives network loss

The default scene and local panel can be configured to operate independently of the supervisory network.

Zone-level protection

Separate fuse/electronic protection, current limiting and soft start for each output.

Feedback

Supply, driver temperature, channel current, communications and optional water-ingress alarm.

Scalable architecture

The same control logic scales from one luminaire to a multi-zone mega-yacht architecture.

Preset scenes for fast, consistent crew operation

An authorized user selects a scene; the system checks permissions, ramps each zone smoothly to its target level and displays status feedback.

HARBOR

15-35% warm white

Calm ambience, low power and minimal light spill.

SWIM PLATFORM

70-100% neutral white

Safe, wide field of view across the platform and water surface.

NIGHT DISPLAY

Synchronized RGBW scene

Rate-limited color transitions across stern and hull-side zones.

TECHNICAL INSPECTION

High-CRI white

Focused light for propeller, stabilizer and hull inspection.

SERVICE / MAINTENANCE

Individual channel test

Verifies channel current, temperature and communication status individually.

UNDERWAY LOCKOUT

Rule-based shutdown

Limits the scene by speed or underway status according to vessel procedure.

1

Select scene



2

Verify permission



3

Smooth ramp



4

Monitor status




5

Return to safe default

Open, isolated connection layers for the project infrastructure

The underwater luminaire does not connect directly to the yacht network. Commands pass through a driver or protocol gateway in a dry, accessible location inside the vessel.

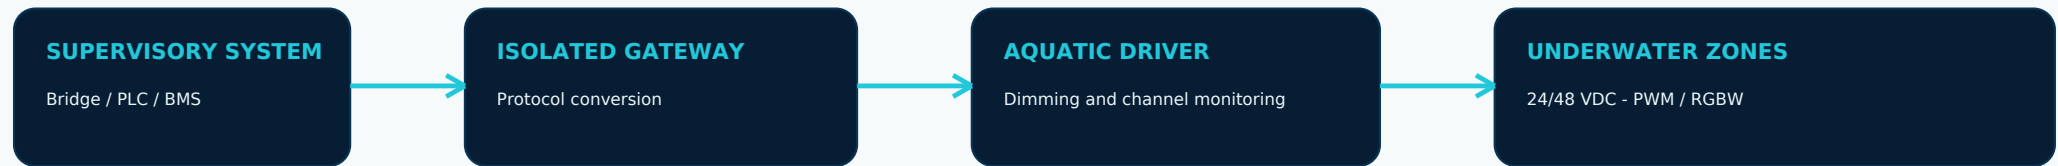


CONNECTION	BEST APPLICATION	DESIGN NOTE
DIRECT PWM	1-4 channels	Short runs, single-color or RGBW; simple local control.
DMX512 / RDM	Addressable multi-zone	Scene control, device addressing and supported status feedback.
DALI-2 GATEWAY	Lighting integration	Connection to the yacht's DALI bus through a gateway in a dry space.
MODBUS TCP / RTU	PLC / BMS	Register-based command, status and alarm integration.
CAN / NMEA 2000	Isolated bridge	Project-specific integration to the yacht network through a selected certified gateway.
DRY CONTACT	Local and fail-safe	On/off, default scene, inhibit or emergency command.

The final protocol is selected at project start according to the shipyard automation platform, cable distance, zone count, class and cybersecurity scope.

One fault should not black out the vessel's entire lighting scene

Each zone has a separate cable, protection device and driver channel. Cable size is calculated from distance, current, ambient temperature and target voltage drop.

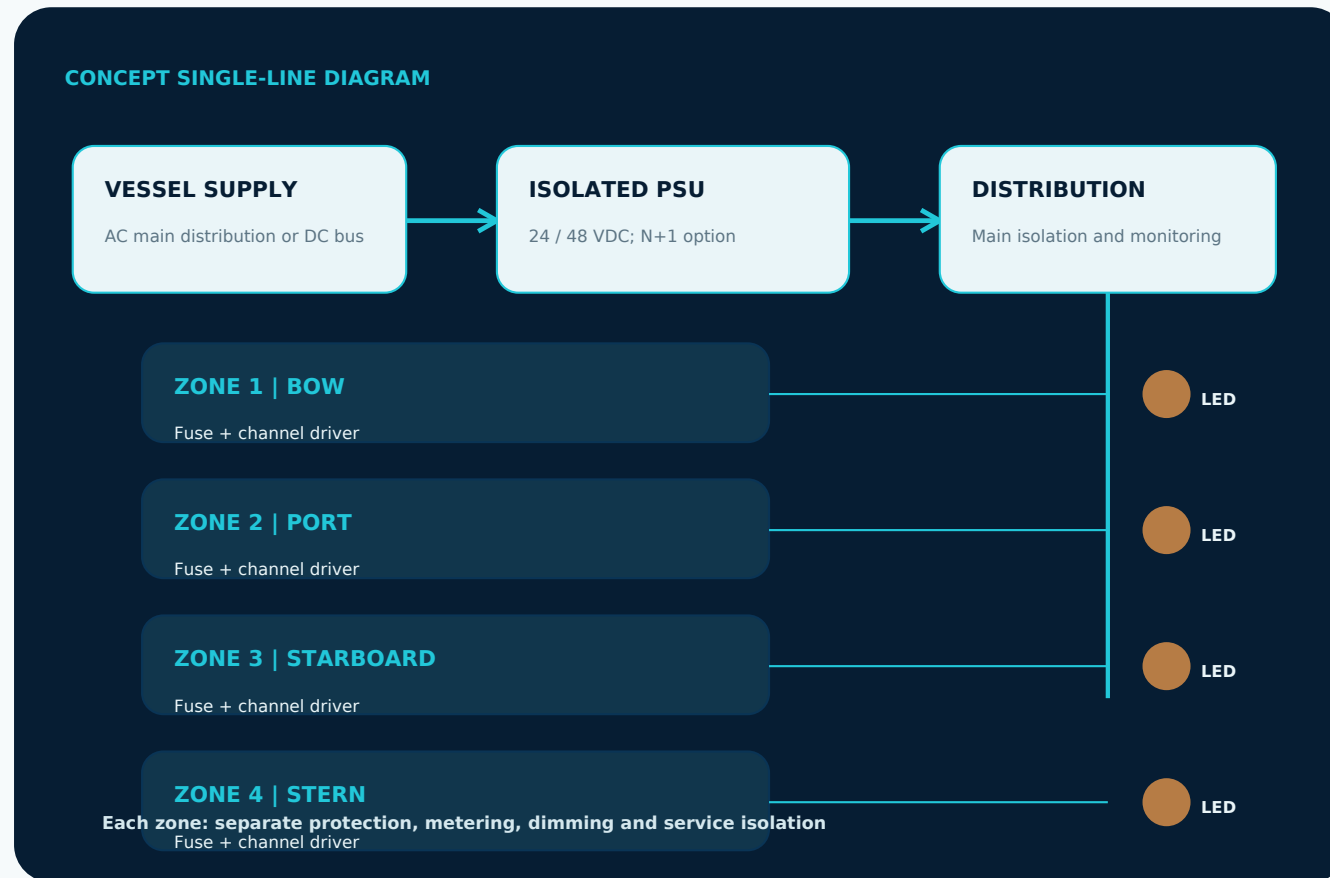

SELECTIVE PROTECTION

Zone fuse / electronic breaker, short-circuit and reverse-polarity protection.



SOFT START

Limits inrush current; staged activation for large RGBW scenes.



THERMAL MANAGEMENT

Driver temperature monitoring, controlled power reduction and alarm threshold.



CABLE DESIGN

The voltage-drop target is project-specific; cable size and protection are selected together.




REDUNDANCY

Optional dual PSU, split bus and separate communication line for critical projects.

Simple bridge operation, in-depth diagnostics on the service screen

Normal operation takes no more than three actions: select a scene, adjust brightness and confirm green status. Detailed measurements are available only in the authorized service view.

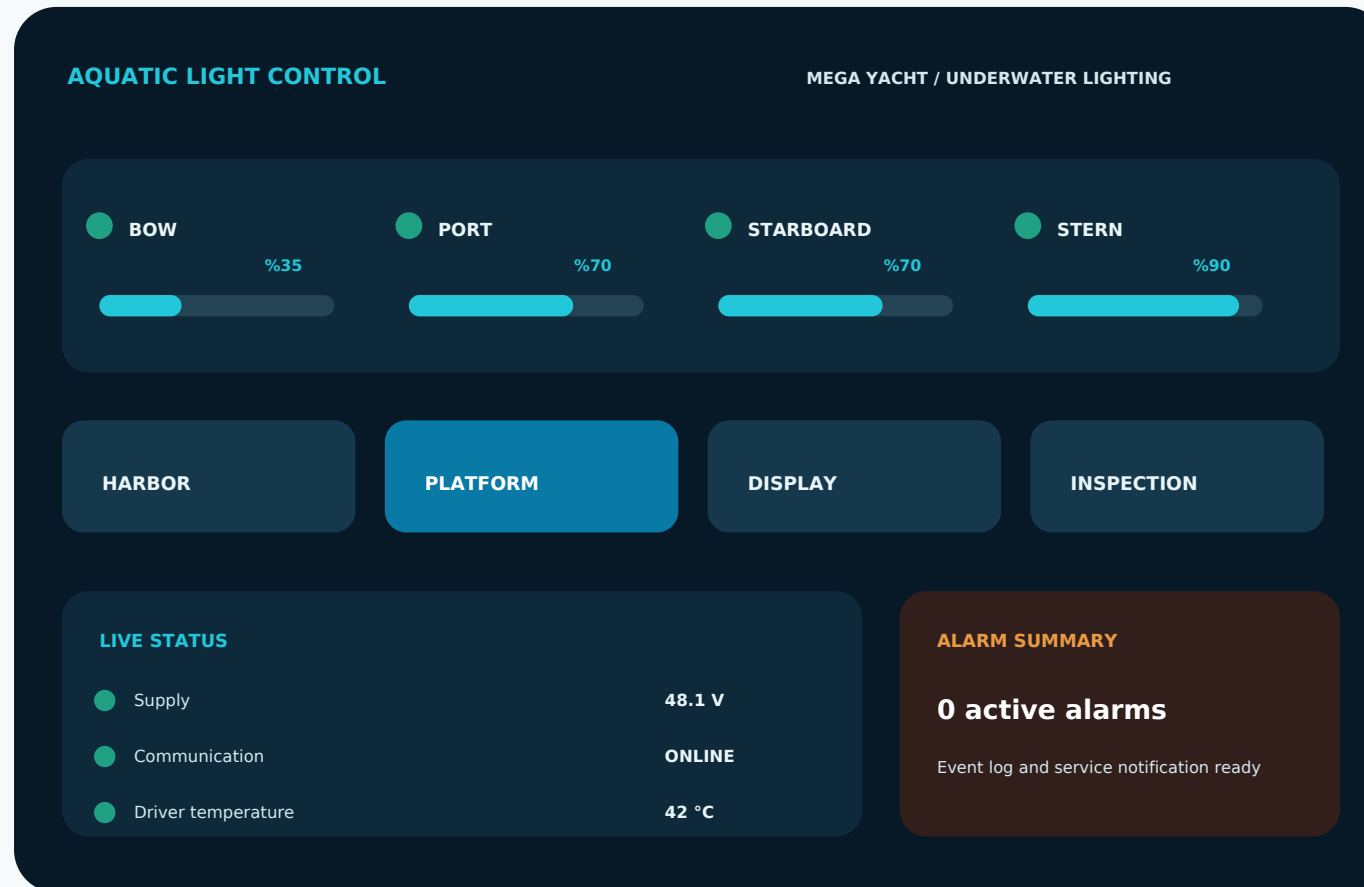

USER ROLES

Guest: scene selection | Crew: zones/brightness | Service: testing/logs | Admin: configuration

MONITORED ALARMS

Overtemperature, overcurrent, short/open LED circuit, power loss, bus loss and optional water-ingress sensor.

ACCESS POINTS

Bridge display, local service panel and authorized maintenance connection only.


FAIL-SAFE BEHAVIOR

On network loss, the last safe scene or the project-defined default level is maintained.

A verification and approval route selected for each project

The applicable scope for product, automation and vessel integration depends on the flag state, classification society, hull type and whether the system is treated as an essential service.

SCOPE	STANDARD / OPTION	APPLICATION NOTE
Luminaires and lighting	IEC 60092-306:2022	Product scope for luminaires and lighting accessories on ships.
Water and pressure resistance	IEC 60529 / project pressure plan	IP68 target, hydrostatic proof test, seal and cable-entry verification.
EMC - metallic hull	IEC 60533	EMC plan for electrical/electronic systems on metallic-hull ships; the applicable edition is confirmed.
EMC - non-metallic hull	IEC 62742:2021	Additional EMC scope to IEC 60533 for composite or non-metallic hulls.
Automation and control	IEC 60092-504:2026	Control, monitoring, alarm and protection requirements when the system is within essential/important service scope.
Type-approval testing	IACS UR E10 Rev.10	Environmental type-test program option for marine electrical/electronic equipment.
Shipboard cables	IEC 60092-352:2025	Cable selection, installation and operating conditions included in project engineering.
Class and cybersecurity	DNV / LR / ABS / BV + IACS UR E27	Type approval, vessel-specific approval and cyber-scope options for network-connected components.



This page is not a certification claim; the applicable standard edition and approval scope are finalized at project start with the shipyard, flag and selected classification society.

1

Hull-surface survey

Hull curvature, laminate/metal thickness and service access are verified.

2

Fairing pad and cutout

A flat seating surface for the wide flange and a controlled hull cutout are prepared.

3

Dry fit

Fastener axes, cable gland, seal compression and service clearances are checked.

4

Hydrostatic test

The housing and glass are verified at proof pressure equal to 1.5 times the model's target depth.

5

Electrical and thermal test

The constant-current driver, thermal protection, insulation and control communications are tested.

6

Sea trial

Light distribution, hull flow, vibration and galvanic isolation are observed in service.

DESIGN AND CERTIFICATION NOTE

Power, lumen output, dimensions, operating depth and IP68 statements in this catalog are concept design targets, not certification claims. Final values will be published after prototype, pressure, thermal, electrical safety, EMC and vessel-class requirements are completed.

S = AISI 316L | B = C95800 nickel-aluminium bronze | D = Super Duplex 2507 | H = 316L + C95800 hybrid

MODEL	SERIES	HOUSING	LED	POWER / SUPPLY	OUTER FLANGE	HULL CUTOUT	RECESS	DEPTH
AQ-UWL-1004-S	COMPACT	AISI 316L stainless steel	4 x high-power LED	24 W / 24 VDC	Ø145 mm	Ø92 mm	68 mm	30 m target
AQ-UWL-1004-B	COMPACT	C95800 nickel-aluminium bronze	4 x high-power LED	24 W / 24 VDC	Ø145 mm	Ø92 mm	68 mm	30 m target
AQ-UWL-2507-B	BRONZE	C95800 nickel-aluminium bronze	7 x RGBW LED	56 W / 24 VDC	Ø185 mm	Ø120 mm	88 mm	50 m target
AQ-UWL-2507-S	BRONZE	AISI 316L stainless steel	7 x RGBW LED	56 W / 24 VDC	Ø185 mm	Ø120 mm	88 mm	50 m target
AQ-UWL-4012-S	PRO	AISI 316L stainless steel	12 x high-power LED	72 W / 24 VDC	Ø220 mm	Ø150 mm	95 mm	75 m target
AQ-UWL-4012-B	PRO	C95800 nickel-aluminium bronze	12 x high-power LED	72 W / 24 VDC	Ø220 mm	Ø150 mm	95 mm	75 m target
AQ-UWL-6516-B	WIDE	C95800 nickel-aluminium bronze	16 x RGBW LED	96 W / 48 VDC	Ø270 mm	Ø190 mm	100 mm	75 m target
AQ-UWL-6516-S	WIDE	AISI 316L stainless steel	16 x RGBW LED	96 W / 48 VDC	Ø270 mm	Ø190 mm	100 mm	75 m target
AQ-UWL-9028-H	SIGNATURE	316L + C95800 hybrid	28 x RGBW LED	168 W / 48 VDC	380 x 270 mm	300 x 190 mm	105 mm	50 m target
AQ-UWL-9028-D	SIGNATURE	Super Duplex 2507	28 x RGBW LED	168 W / 48 VDC	380 x 270 mm	300 x 190 mm	105 mm	50 m target

All values are concept design targets. Cutout and flange dimensions are approved before production according to hull curvature, laminate/metal thickness and class requirements.

S = AISI 316L | B = C95800 nickel-aluminium bronze | D = Super Duplex 2507 | H = 316L + C95800 hybrid

MODEL	SERIES	HOUSING	LED	POWER / SUPPLY	OUTER FLANGE	HULL CUTOUT	RECESS	DEPTH
AQ-UWL-0501-S	NANO	AISI 316L stainless steel	1 x high-power LED	8 W / 24 VDC	Ø95 mm	Ø48 mm	55 mm	20 m target
AQ-UWL-0501-B	NANO	C95800 nickel-aluminium bronze	1 x high-power LED	8 W / 24 VDC	Ø95 mm	Ø48 mm	55 mm	20 m target
AQ-UWL-1806-B	SLIM	C95800 nickel-aluminium bronze	6 x RGBW LED	36 W / 24 VDC	310 x 105 mm	240 x 45 mm	70 mm	30 m target
AQ-UWL-1806-S	SLIM	AISI 316L stainless steel	6 x RGBW LED	36 W / 24 VDC	310 x 105 mm	240 x 45 mm	70 mm	30 m target
AQ-UWL-3009-D	VECTOR	Super Duplex 2507	9 x high-power LED	63 W / 24 / 48 VDC	220 mm across flats	145 mm across flats	100 mm	100 m target
AQ-UWL-3009-B	VECTOR	C95800 nickel-aluminium bronze	9 x high-power LED	63 W / 24 / 48 VDC	220 mm across flats	145 mm across flats	100 mm	100 m target
AQ-UWL-7018-B	DEEP	C95800 nickel-aluminium bronze	18 x high-power LED	126 W / 48 VDC	340 x 220 mm	250 x 130 mm	150 mm	150 m target
AQ-UWL-7018-S	DEEP	AISI 316L stainless steel	18 x high-power LED	126 W / 48 VDC	340 x 220 mm	250 x 130 mm	150 mm	150 m target
AQ-UWL-15036-H	PANORAMA	316L + C95800 hybrid	36 x RGBW LED	216 W / 48 VDC	520 x 360 mm	420 x 260 mm	120 mm	50 m target
AQ-UWL-15036-D	PANORAMA	Super Duplex 2507	36 x RGBW LED	216 W / 48 VDC	520 x 360 mm	420 x 260 mm	120 mm	50 m target

All values are concept design targets. Cutout and flange dimensions are approved before production according to hull curvature, laminate/metal thickness and class requirements.

S = AISI 316L | B = C95800 nickel-aluminium bronze | D = Super Duplex 2507 | H = 316L + C95800 hybrid

MODEL	SERIES	HOUSING	LED	POWER / SUPPLY	OUTER FLANGE	HULL CUTOUT	RECESS	DEPTH
AQ-UWL-T0303-B	TRIO	C95800 nickel-aluminium bronze	3 x high-power LED	18 W / 24 VDC	150 x 135 mm	90 x 80 mm	65 mm	30 m target
AQ-UWL-T0303-S	TRIO	AISI 316L stainless steel	3 x high-power LED	18 W / 24 VDC	150 x 135 mm	90 x 80 mm	65 mm	30 m target
AQ-UWL-T1206-S	DELTA	AISI 316L stainless steel	6 x high-power LED	36 W / 24 VDC	220 x 200 mm	140 x 125 mm	80 mm	50 m target
AQ-UWL-T1206-B	DELTA	C95800 nickel-aluminium bronze	6 x high-power LED	36 W / 24 VDC	220 x 200 mm	140 x 125 mm	80 mm	50 m target
AQ-UWL-T2510-B	TRIDENT	C95800 nickel-aluminium bronze	10 x RGBW LED	60 W / 24 / 48 VDC	280 x 255 mm	190 x 170 mm	95 mm	75 m target
AQ-UWL-T2510-S	TRIDENT	AISI 316L stainless steel	10 x RGBW LED	60 W / 24 / 48 VDC	280 x 255 mm	190 x 170 mm	95 mm	75 m target
AQ-UWL-T4515-D	RAZOR	Super Duplex 2507	15 x high-power LED	105 W / 48 VDC	350 x 315 mm	240 x 215 mm	125 mm	100 m target
AQ-UWL-T4515-B	RAZOR	C95800 nickel-aluminium bronze	15 x high-power LED	105 W / 48 VDC	350 x 315 mm	240 x 215 mm	125 mm	100 m target
AQ-UWL-T9828-H	APEX	316L + C95800 hybrid	28 x RGBW LED	196 W / 48 VDC	520 x 460 mm	390 x 340 mm	135 mm	75 m target
AQ-UWL-T9828-D	APEX	Super Duplex 2507	28 x RGBW LED	196 W / 48 VDC	520 x 460 mm	390 x 340 mm	135 mm	75 m target

All values are concept design targets. Cutout and flange dimensions are approved before production according to hull curvature, laminate/metal thickness and class requirements.



YOUR EYES UNDERWATER

Underwater Lighting - Design - Manufacturing - Integration

CONTACT

Sehitler District, Barbaros Hayrettin Avenue No:90/A

Golcuk / Kocaeli / Turkey

+90 262 412 24 42

bilgi@aquatic.com.tr

www.aquatic.com.tr

30 MODEL

FLUSH HULL-MOUNT

CONCEPT PRODUCT FAMILY | 2026