

Technical Data Sheet

CODE 16164

CA 160 MD E

In-line centrifugal fans in metal



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Max airflow at Min speed at 60 Hz (m³/h)	320
Insulation class	II°	Max pressure at 60 Hz (mmH2O)	27,5
IP	44	Max pressure at Max speed (mmH2O)	36,8
Max absorbed current at maMinx speed at 60 Hz (A)	0,38	Max pressure at Max speed (Pa)	361
Max absorbed current at Max speed (A)	0,40	Max pressure at Max speed at 60Hz (Pa)	238
Max absorbed current at Max speed at 60 Hz (A)	0,50	Max pressure at Mid speed (mmH2O)	29,4
Max absorbed current at Mid speed (A)	0,38	Max pressure at Mid speed (Pa)	288
Max absorbed current at Mid speed at 60 Hz (A)	0,45	Max pressure at Mid speed at 60Hz (mmH2O)	24,3
Max absorbed current at Min speed (A)	0,33	Max pressure at Mid speed at 60Hz (Pa)	238
Max absorbed power at Max speed (W)	68	Max pressure at Min speed at 60Hz (mmH2O)	20,5
Max absorbed power at Max speed at 60 Hz (W)	80	Max pressure at Min speed at 60Hz (Pa)	201
Max absorbed power at Mid speed (W)	50	Max RPM	2430
Max absorbed power at Mid speed at 60 Hz (W)	62	Max speed at 60 Hz (Rpm)	2125
Max absorbed power at Min speed at 60 Hz (W)	0,38	Mid speed at 60 Hz (Rpm)	2000
Max ambient temperature for continuous operation (°C)	50	Min RPM	1600
Nominal diameter (mm)	160	Min speed at 60 Hz (Rpm)	1610
Power absorbed at 1st speed (W)	0,33	Potenza sonora at supply side at Min speed LWA [dB (A)]	74,1
Voltage (V)	220-240	Pressure at 1st speed (mmH2O)	22,4
Weight (Kg)	6,3	Pressure at 1st speed (Pa)	220
Airflow at 1st speed (l/s)	88	RPM at Mid speed	2100
Airflow at 1st speed (m³/h)	315	Sound power at extract side at Max speed LWA [dB (A)]	88,8
Breakout sound power at Max speed at 60 Hz LWA [dB (A)]	59,5	Sound power at extract side at Mid speed LWA [dB (A)]	83,7
Breakout sound power at Mid speed at 60 Hz LWA [dB (A)]	54,8	Sound power at extract side at Min speed LWA [dB (A)]	75,5
Breakout sound power at Min speed at 60 Hz LWA [dB (A)]	48,8	Sound power at supply side at Max speed LWA [dB (A)]	87,2
Breakout sound power LWA at Max speed [dB (A)]	61,4	Sound power at supply side at Mid speed LWA [dB (A)]	82,3
Breakout sound power LWA at Mid speed [dB (A)]	56,2	Sound powerat at extraction side at Max speed at 60 Hz LWA [dB (A)]	87,3
Breakout sound power LWA at Min speed [dB (A)]	47,8	Sound powerat at extraction side at Mid speed at 60 Hz LWA [dB (A)]	83,1
breakout sound pressure at 3m at Max speed at 60 Hz Lp [dB (A)]	39	Sound powerat at extraction side at Min speed at 60 Hz LWA [dB (A)]	76
Breakout sound pressure at 3m at Max speed Lp [dB (A)]	40,8	Sound powerat at supply side at Max speed at 60 Hz LWA [dB (A)]	86,1
breakout sound pressure at 3m at Mid speed at 60 Hz Lp [dB (A)]	34,3	Sound powerat at supply side at Mid speed at 60 Hz LWA [dB (A)]	81,2
Breakout sound pressure at 3m at Mid speed Lp [dB (A)]	35,7	Sound powerat at supply side at Min speed at 60 Hz LWA [dB (A)]	74,9
breakout sound pressure at 3m at Min speed at 60 Hz Lp [dB (A)]	28,3	Sound pressure at extract side at 3m at Max speed at 60 HzLp [dB (A)]	69,8
Breakout sound pressure at 3m at Min speed Lp [dB (A)]	27,3	Sound pressure at extract side at 3m at Max speed Lp [dB (A)]	71,2
		Sound pressure at extract side at 3m at Mid speed at 60 HzLp [dB (A)]	63,7

Max airflow at Max speed (l/s)	131	Sound pressure at extract side at 3m at	66,2
Max airflow at Max speed (m³/h)	470	Mid speed Lp [dB (A)]	
Max airflow at Max speed at 60 Hz (l/s)	117	Sound pressure at extract side at 3m at	58,5
Max airflow at Max speed at 60 Hz	420	Min speed at 60 HzLp [dB (A)]	
Max airflow at Mid speed (m³/h)	415	Sound pressure at extract side at 3m at	58
Max airflow at Mid speed at 60 Hz (l/s)	108	Min speed Lp [dB (A)]	
Max airflow at Mid speed at 60 Hz	390	Sound pressure at supply side at 3m at	69,7
Max airflow at Min speed (l/s)	115	Max speed Lp [dB (A)]	
Max airflow at Min speed at 60 Hz (l/s)	89	Sound pressure at supply side at 3m at	64,8
		Mid speed Lp [dB (A)]	
		Sound pressure at supply side at 3m at	56,6
		Min speed Lp [dB (A)]	
		Sound pressure at supply side at 3m at	68,5
		Max speed at 60 HzLp [dB (A)]	
		Sound pressure at supply side at 3m at	65,6
		Mid speed at 60 HzLp [dB (A)]	
		Sound pressure at supply side at 3m at	57,4
		Min speed at 60 HzLp [dB (A)]	

Dimensions

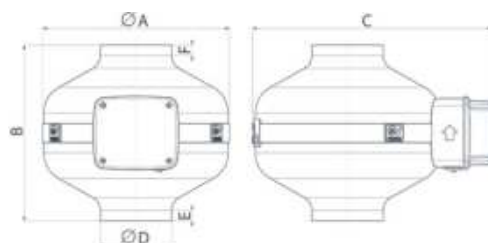

Size A (mm)	347
Size B (mm)	275
Size C (mm)	424
Size D (mm)	157
Size E (mm)	18
Size F (mm)	18

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 16164

CA 160 MD E


In-line centrifugal fans in metal



Description

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 160 mm.
- 3 speed fan consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

Curves

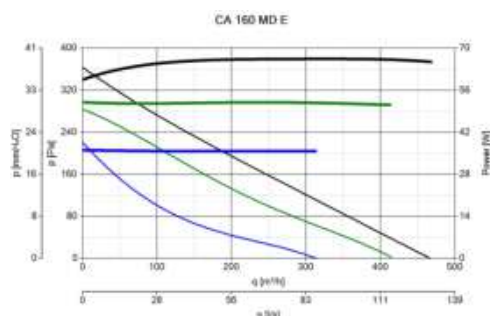

Accessories



CA-MU (STAFFE DI SOSTEGNO)

Code 22674



KIT SCB (TRASF.E.C.)

Code 22481



CA-G 160 (GRIGLIA DI PROTEZIONE)

Code 22762



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998

C TIMER



C TIMER

Code 12999

TRIO D

Code 12866

TRIO-LINEO**503**

Code 12891

PER INFORMAZIONI / FOR INFORMATION**ITALY**

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com**UNITED KINGDOM & REP. OF
IRELAND**

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk**OTHER COUNTRIES**

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com