

Technical Data Sheet

CODE 16167

CA 315 MD E

In-line centrifugal fans in metal



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Max airflow at Max speed (l/s)	282
Insulation class	II°	Max airflow at Max speed (m³/h)	1015
IP	44	Max airflow at Mid speed (m³/h)	830
Max absorbed current at Max speed (A)	0,53	Max airflow at Min speed (l/s)	231
Max absorbed current at Min speed (A)	0,51	Max pressure at Max speed (mmH2O)	55,5
Max absorbed Power at 60 Hz (W)	175	Max pressure at Max speed (Pa)	545
Max absorbed power at Max speed (W)	125	Max pressure at Mid speed (mmH2O)	50,7
Max ambient temperature for continuous operation (°C)	50	Max pressure at Mid speed (Pa)	497
Nominal diameter (mm)	315	Max RPM	2660
Power absorbed at 1st speed (W)	58	Min RPM	1545
Voltage (V)	220-240	Pressure at 1st speed (mmH2O)	36
Weight (Kg)	11	Pressure at 1st speed (Pa)	353
Airflow at 1st speed (l/s)	158	RPM at Mid speed	2155
Airflow at 1st speed (m³/h)	570	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	41,8
		Sound pressure at 3m at Max speed Lp [dB (A)]	52,3

Dimensions

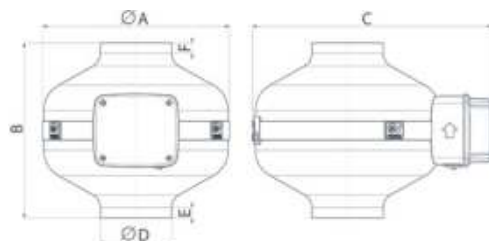

Size A (mm)	406
Size B (mm)	306
Size C (mm)	488
Size D (mm)	312
Size E (mm)	21
Size F (mm)	30

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 16167

CA 315 MD E


In-line centrifugal fans in metal



Description

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 315 mm.
- 3 speed fan consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

Curves

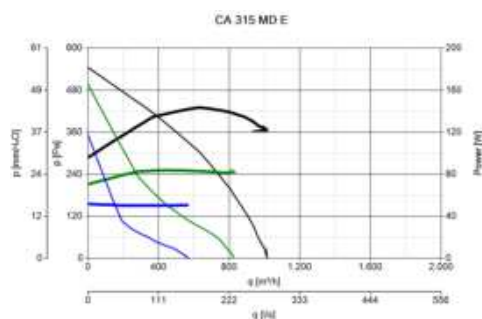

Accessories



**C 1.5
(COMANDO EL.
1.5 A)**

Code 12966



**CA-MU (STAFFE
DI SOSTEGNO)**

Code 22674



TRIO-CA

Code 12869



**KIT SCB
(TRASF.E.C.)**

Code 22481



**CA-G 315
(GRIGLIA DI
PROTEZIONE)**

Code 22775



SCNRB I

Code 12971



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998



C TIMER

Code 12999

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com