

Technical Data Sheet

CODE 16187

CA 315 MD E RF

Centrifugal duct fans for roof mounting



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Airflow at 1st speed (l/s)	102.7
Insulation class	II ^o	Airflow at 1st speed (m ³ /h)	370
IP	44	Max airflow at Max speed (l/s)	240.2
Max absorbed current at Max speed (A)	0,57	Max airflow at Max speed (m ³ /h)	865
Max absorbed current at Min speed (A)	0.48	Max pressure at Max speed (mmH2O)	58.5
Max absorbed Power at 60 Hz (W)	175	Max pressure at Max speed (Pa)	573.7
Max absorbed power at Max speed (W)	130	Max RPM	2590
Max ambient temperature for continuous operation (°C)	50	Min RPM	1186
Nominal diameter (mm)	315	Pressure at 1st speed (mmH2O)	37.6
Power absorbed at 1st speed (W)	48	Pressure at 1st speed (Pa)	368.9
Voltage (V)	220-240	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	32.8
Weight (Kg)	12	Sound pressure at 3m at Max speed Lp [dB (A)]	40.7

Dimensions

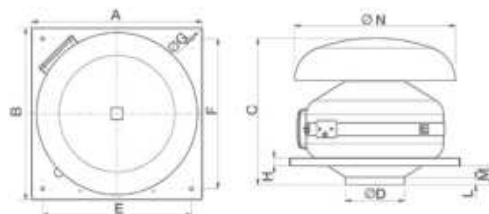

Size A (mm)	489
Size B (mm)	489
Size C (mm)	415
Size D (mm)	ø 312
Size E (mm)	435
Size F (mm)	435
Size G (mm)	ø 9
Size H (mm)	20
Size L (mm)	36
Size M (mm)	65
Size N (mm)	ø 534
Size O (mm)	252

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 16187

CA 315 MD E RF


Centrifugal duct fans for roof mounting



Description

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 315 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel fixing brackets.

Curves

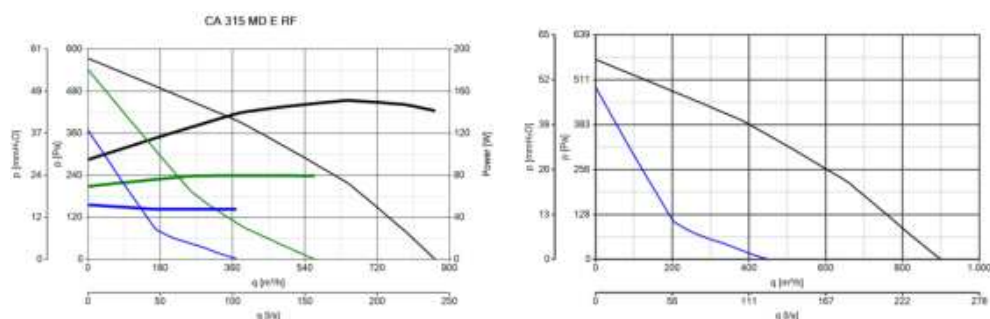

Accessories



TRIO-CA

Code 12869



KIT SCB (TRASF.E.C.)

Code 22481



CA-G 315 (GRIGLIA DI PROTEZIONE)

Code 22775




C 1.5 (COMANDO EL. 1.5 A)

Code 12966



C 2.5 (COMANDO EL. 2.5 A)

Code 12967



CARF-C 250/315 (CONTROTELAIO DI BASE)

Code 22545



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998



C TIMER

Code 12999

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com