

# Technical Data Sheet

CODE 16253

## CA IL 160 Q

Compact flat in-line centrifugal fans




### Certifications



## Technical and performance data

|                                                       |      |                                          |      |
|-------------------------------------------------------|------|------------------------------------------|------|
| Frequency (Hz)                                        | 50   | Airflow at 1st speed (l/s)               | 42   |
| Insulation class                                      | I°   | Airflow at 1st speed (m³/h)              | 150  |
| Max absorbed power at Mid speed (W)                   | 33   | Breakout sound power LWA [dB(A)]         | 54   |
| Max ambient temperature for continuous operation (°C) | 40   | Max airflow (l/s)                        | 97   |
| Motor class                                           | B    | Max airflow (m³/h)                       | 350  |
| Motor protection IP                                   | 44   | Max airflow at Mid speed (m³/h)          | 250  |
| Nominal current at Max speed (A)                      | 0,23 | Max airflow at Min speed (l/s)           | 69   |
| Nominal current at Min speed (A)                      | 0,16 | Max pressure (mmH2O)                     | 30,6 |
| Nominal diameter (mm)                                 | 160  | Max pressure (Pa)                        | 300  |
| Nominal power at Max speed (W)                        | 50   | Max pressure at Mid speed (mmH2O)        | 26,5 |
| Nominal power at Min speed (W)                        | 18   | Max pressure at Mid speed (Pa)           | 260  |
| Number of speeds                                      | 3    | Pressure at 1st speed (mmH2O)            | 11,2 |
| Voltage (V)                                           | 230  | Pressure at 1st speed (Pa)               | 110  |
| Weight (Kg)                                           | 6    | Sound power at exhaust inlet LWA [dB(A)] | 62   |
|                                                       |      | Sound power at supply outlet LWA [dB(A)] | 63   |

## Dimensions

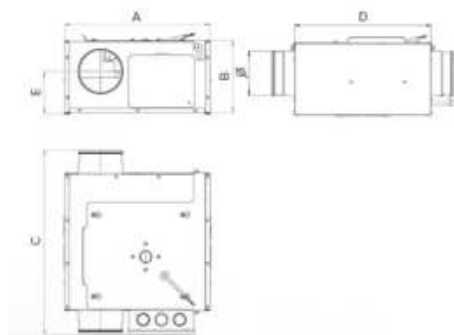

|             |     |
|-------------|-----|
| Ø (mm)      | 160 |
| Size A (mm) | 390 |
| Size B (mm) | 198 |
| Size C (mm) | 467 |
| Size D (mm) | 362 |
| Size E (mm) | 98  |

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

#### UNITED KINGDOM & REP. OF IRELAND

Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

#### OTHER COUNTRIES

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com

# Technical Data Sheet

CODE 16253

## CA IL 160 Q

Compact flat in-line centrifugal fans




## Description

- Casing and motor-support made of galvanized sheet steel; lined internally with PE sound-proof panel (thickness 10 mm).
- Circular spigots for connection to standard tubes, equipped with double lip rubber seal for perfect air tightness.
- Nominal diameter: 160 mm.
- External rotor AC motorfan, with shaft turning in ball bearings, coupled to a backward curved centrifugal impeller.
- Galvanized steel sheet brackets, directly coupled to casing.
- Electric connection box accommodating capacitors, molded with shock-proof plastic resin resistant against aggressive agents, integrating cable

cages and cable glands to ensure high protection (IP55) against dust and water.

- 3 alternative installation: wall, ceiling and false-ceiling.
- Easy maintenance: motor is directly fixed to the cover, in turn hinged to the casing, allowing easy external rotation and motorfan direct access.
- Protection against dust and water: IP44.
- Electric insulation class: I (grounding is required).

## Curves

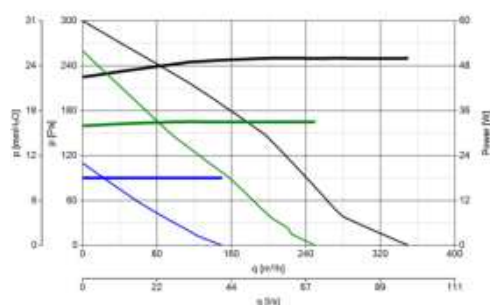

## Accessories



**TRA 250**  
**(TELAIO CON**  
**RETE ANTINF.)**

Code 51150



**PGR 250**  
**(PERSIANA**  
**GRAVITA')**

Code 50150



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**

Code 12966



**GR 160**  
Code 21180



**FS 160**  
Code 21185



**TRIO D**  
Code 12866



**IREM D**  
Code 12867

ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)