

Technical Data Sheet

CODE 17149

LINEO 250 Q

Mixed flow extractor fans



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50	Max airflow at Max speed (l/s)	275
Insulation class	II°	Max airflow at Max speed (m³/h)	990
IP	44	Max pressure at Max speed (mmH2O)	53
Max absorbed current at Max speed (A)	0,50	Max pressure at Max speed (Pa)	519,9
Max absorbed current at Min speed (A)	0,40	Max RPM	2550
Max absorbed power at Max speed (W)	110	Min RPM	1850
Max ambient temperature for continuous operation (°C)	60	Potenza sonora at supply side at Min speed LWA [dB (A)]	62,6
Power absorbed at 1st speed (W)	85	Pressure at 1st speed (mmH2O)	34
Voltage (V)	220-240	Pressure at 1st speed (Pa)	333,5
Weight (Kg)	5,9	Sound power at extract side at Max speed LWA [dB (A)]	76,7
Airflow at 1st speed (l/s)	200	Sound power at extract side at Min speed LWA [dB (A)]	63,2
Airflow at 1st speed (m³/h)	720	Sound power at supply side at Max speed LWA [dB (A)]	77,2
Breakout sound power LWA at Max speed [dB (A)]	63,1	Sound pressure at extract side at 3m at Max speed Lp [dB (A)]	59,2
Breakout sound power LWA at Min speed [dB (A)]	53,1	Sound pressure at extract side at 3m at Min speed Lp [dB (A)]	45,7
Breakout sound pressure at 3m at Max speed Lp [dB (A)]	42,6	Sound pressure at supply side at 3m at Max speed Lp [dB (A)]	59,7
Breakout sound pressure at 3m at Min speed Lp [dB (A)]	32,6	Sound pressure at supply side at 3m at Min speed Lp [dB (A)]	45,1

Dimensions

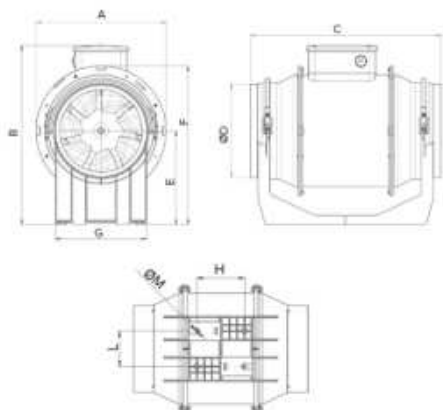

Size A (mm)	300
Size B (mm)	322
Size C (mm)	385
Size D (mm)	247
Size E (mm)	152,5
Size F (mm)	292
Size G (mm)	176,5
Size H (mm)	145
Size L (mm)	140
Size M (mm)	5,5

PER INFORMAZIONI / FOR INFORMATION

UNITED KINGDOM & REP. OF

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 17149

LINEO 250 Q

Mixed flow extractor fans




Description

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Nominal diameter 250 mm.
- Induction motor, thermally protected, with shaft mounted on ball

- bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Speed adjustable through Vortice speed devices.

Curves

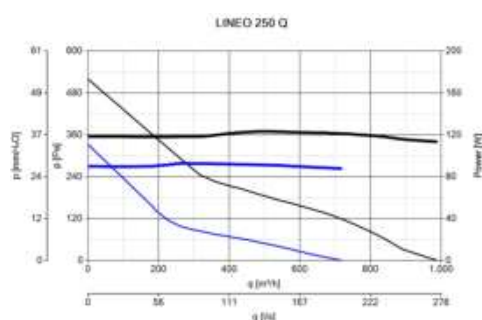

Accessories



LINEO-G 250

Code 22706



LINEO-SF 500

Code 22593



IREM D

Code 12867



KIT SCB (TRASF.E.C.)

Code 22481



KIT SCB5 (TRASF.5 V.)

Code 22483



IN-LINE-S 250

Code 22571



LINEO-C 250

Code 22589



LINEO-SF 700



LINEO-PF 250



DUO



C 1.5

Code 22594

Code 22583

Code 22914

**(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI / FOR INFORMATION

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com