

# Technical Data Sheet

CODE 16155

## CA 200 MD

In-line centrifugal fans in steel (EXTRA UE)



### Certifications



CB TEST CERTIFICATE

## Technical and performance data

|                                                       |         |                                                              |      |
|-------------------------------------------------------|---------|--------------------------------------------------------------|------|
| Frequency (Hz)                                        | 50      | Airflow at 1st speed (l/s)                                   | 228  |
| Insulation class                                      | II°     | Airflow at 1st speed (m³/h)                                  | 820  |
| IP                                                    | 44      | Max airflow at Max speed (l/s)                               | 292  |
| Max absorbed current at Max speed (A)                 | 0,70    | Max airflow at Max speed (m³/h)                              | 1050 |
| Max absorbed current at Min speed (A)                 | 0,60    | Max pressure at Max speed (mmH2O)                            | 48   |
| Max absorbed power at Max speed (W)                   | 155     | Max pressure at Max speed (Pa)                               | 471  |
| Max ambient temperature for continuous operation (°C) | 50      | Max RPM                                                      | 2100 |
| Nominal diameter (mm)                                 | 200     | Min RPM                                                      | 1700 |
| Power absorbed at 1st speed (W)                       | 115     | Pressure at 1st speed (mmH2O)                                | 37   |
| Voltage (V)                                           | 220-240 | Pressure at 1st speed (Pa)                                   | 363  |
| Weight (Kg)                                           | 6       | Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed | 43,8 |
|                                                       |         | Sound pressure at 3m at Max speed Lp [dB (A)]                | 49,6 |

## Dimensions

|             |     |
|-------------|-----|
| Size A (mm) | 347 |
| Size B (mm) | 275 |
| Size C (mm) | 424 |
| Size D (mm) | 197 |
| Size E (mm) | 20  |
| Size F (mm) | 17  |

### PER INFORMAZIONI / FOR INFORMATION

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)

# Technical Data Sheet

CODE 16155

## CA 200 MD


In-line centrifugal fans in steel (EXTRA UE)



## Description

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 200 mm.
- 2 speed AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.
- Speed adjustable through Vortice speed control.

## Curves

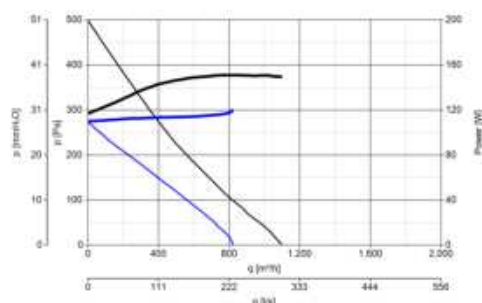

## Accessories



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**

Code 12966



**C 2.5**  
**(COMANDO EL.**  
**2.5 A)**

Code 12967



**KIT SCB**  
**(TRASF.E.C.)**

Code 22481



**CA-MU (STAFFE**  
**DI SOSTEGNO)**

Code 22674



**TRIO-CA**

Code 12869

PER INFORMAZIONI / FOR INFORMATION

ITALY

UNITED KINGDOM & REP. OF  
IRELAND

OTHER COUNTRIES

Pre Sales:  
prevendita@vortice-italy.com  
After Sales:  
postvendita@vortice-italy.com

Sales Dept:  
sales@vortice.ltd.uk  
Technical Dept:  
technical@vortice.ltd.uk

Sales Dept:  
export@vortice-italy.com  
After Sales:  
after-sales@vortice-italy.com