


# Technical Data Sheet

CODE 11260

## ME 100/4" LL

Wall axial fans



### Certifications



CE



CCC



VDE



EAC



UKCA




CB TEST CERTIFICATE

## Technical and performance data

|                                                       |         |                                                                       |       |
|-------------------------------------------------------|---------|-----------------------------------------------------------------------|-------|
| Frequency (Hz)                                        | 50      | Airflow at 1st speed (m <sup>3</sup> /h)                              | 65    |
| Insulation class                                      | II°     | Max airflow at Max speed (l/s)                                        | 26,4  |
| IP                                                    | 45      | Max airflow at Max speed (m <sup>3</sup> /h)                          | 95    |
| Max absorbed current at Max speed (A)                 | 0,052   | Max pressure at Max speed (mmH2O)                                     | 4,7   |
| Max absorbed current at Min speed (A)                 | 0,039   | Max pressure at Max speed (Pa)                                        | 46,09 |
| Max absorbed power at Max speed (W)                   | 9       | Max RPM                                                               | 2240  |
| Max ambient temperature for continuous operation (°C) | 50      | Min RPM                                                               | 1700  |
| Nominal diameter (mm)                                 | 100     | Pressure at 1st speed (mmH2O)                                         | 2,5   |
| Power absorbed at 1st speed (W)                       | 5       | Pressure at 1st speed (Pa)                                            | 24,52 |
| Voltage (V)                                           | 220-240 | Sound power at Min speed LWA [dB(A)]                                  | 41,3  |
| Weight (Kg)                                           | 0,6     | Sound power at Min speed LWA [dB(A)]                                  | 47,4  |
| Airflow at 1st speed (l/s)                            | 18,1    | Sound pressure at 3m at Max speed calculated in free field Lp [dB(A)] | 26,9  |
|                                                       |         | Sound pressure at 3m at Min speed calculated in free field Lp [dB(A)] | 20,8  |

## Dimensions

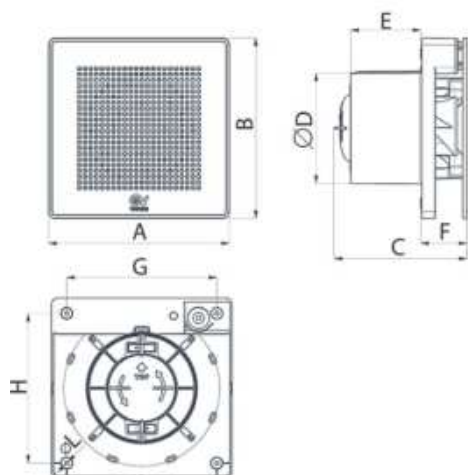

|             |       |
|-------------|-------|
| Size A (mm) | 159   |
| Size B (mm) | 159   |
| Size C (mm) | 116,5 |
| Size D (mm) | Ø 98  |
| Size E (mm) | 61,5  |
| Size F (mm) | 40,5  |
| Size G (mm) | 132   |
| Size H (mm) | 132   |
| Size L (mm) | Ø 3,5 |

PER INFORMAZIONI / FOR INFORMATION

UNITED KINGDOM & REP. OF

#### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

#### IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

#### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)

# Technical Data Sheet

CODE 11260

## ME 100/4" LL


Wall axial fans



## Description

- Material: UV resistant white plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings; 2 operating speeds controlled electronically from pcb.
- Air flow between 65 m<sup>3</sup>/h and 95 m<sup>3</sup>/h.
- Equipped with non-return damper preventing unwanted backdraught when the fan is off.

## Curves

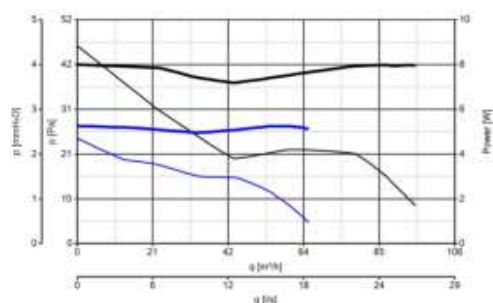

PER INFORMAZIONI / FOR INFORMATION

### ITALY

Pre Sales:

[prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

After Sales:

[postvendita@vortice-italy.com](mailto:postvendita@vortice-italy.com)

### UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

[sales@vortice.ltd.uk](mailto:sales@vortice.ltd.uk)

Technical Dept:

[technical@vortice.ltd.uk](mailto:technical@vortice.ltd.uk)

### OTHER COUNTRIES

Sales Dept:

[export@vortice-italy.com](mailto:export@vortice-italy.com)

After Sales:

[after-sales@vortice-italy.com](mailto:after-sales@vortice-italy.com)