


## ENERGY DATA

CODE 11261

### ME 100/4" LL TP

Wall axial fans

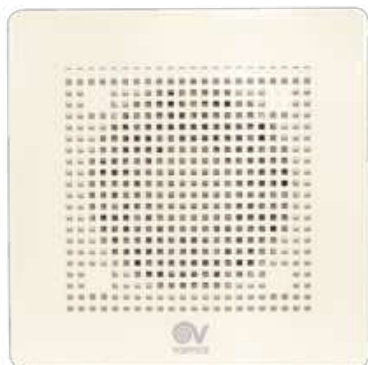

| ATTRIBUTO                                                                                       | VALORE ATTRIBUTO      |
|-------------------------------------------------------------------------------------------------|-----------------------|
| Supplier's name or trade mark                                                                   | Vortice               |
| Specific Energy Consumption (SEC) class in temperate climate zone                               | NA                    |
| Specific Energy Consumption (SEC) class in temperate climate zone [kWh/m <sup>2</sup> y]        | -9,9                  |
| Specific Energy Consumption class SEC in cold climate zone [kWh/m <sup>2</sup> y]               | -23,2                 |
| Specific Energy Consumption class SEC in warm climate zone [kWh/m <sup>2</sup> y]               | -2,2                  |
| Declared type                                                                                   | UVR-U: unidirezionale |
| Type of drive                                                                                   | NA                    |
| Type of heat recovery system HRS                                                                | assente               |
| Thermal efficiency of heat recovery at reference airflow [%]                                    | NA                    |
| Max airflow [m <sup>3</sup> /h]                                                                 | 93                    |
| Fan drive electric power input, including any motor control equipment, at maximum flow rate [W] | 8,1                   |
| Sound power LWA [dB(A)]                                                                         | 68                    |
| Reference airflow [m <sup>3</sup> /s]                                                           | 0,0181                |
| Reference ? pressure [Pa]                                                                       | 22                    |
| SPI [W/(m <sup>3</sup> /h)]                                                                     | 0,11828               |
| Control factor CTRL                                                                             | 1                     |
| Control type                                                                                    | manuale               |
| Max internal leakage rate [%]                                                                   | NA                    |
| Max external leakage rate [%]                                                                   | NA                    |
| Mixing rate                                                                                     | NA                    |
| Position and description of visual filter warning                                               | NA                    |
| Airflow sensitivity to pressure variations at + 20 Pa and – 20 Pa                               | NA                    |
| Indoor/outdoor air tightness [m <sup>3</sup> /h]                                                | NA                    |
| Annual electricity consumption (AEC) [kWh electricity/y]                                        | 163                   |
| AHS temperate annual energy saved [kWh primary energy/y]                                        | 1397                  |
| AHS cold annual energy saved [kWh primary energy/y]                                             | 2732                  |
| AHS warm annual energy saved [kWh primary energy/y]                                             | 632                   |