





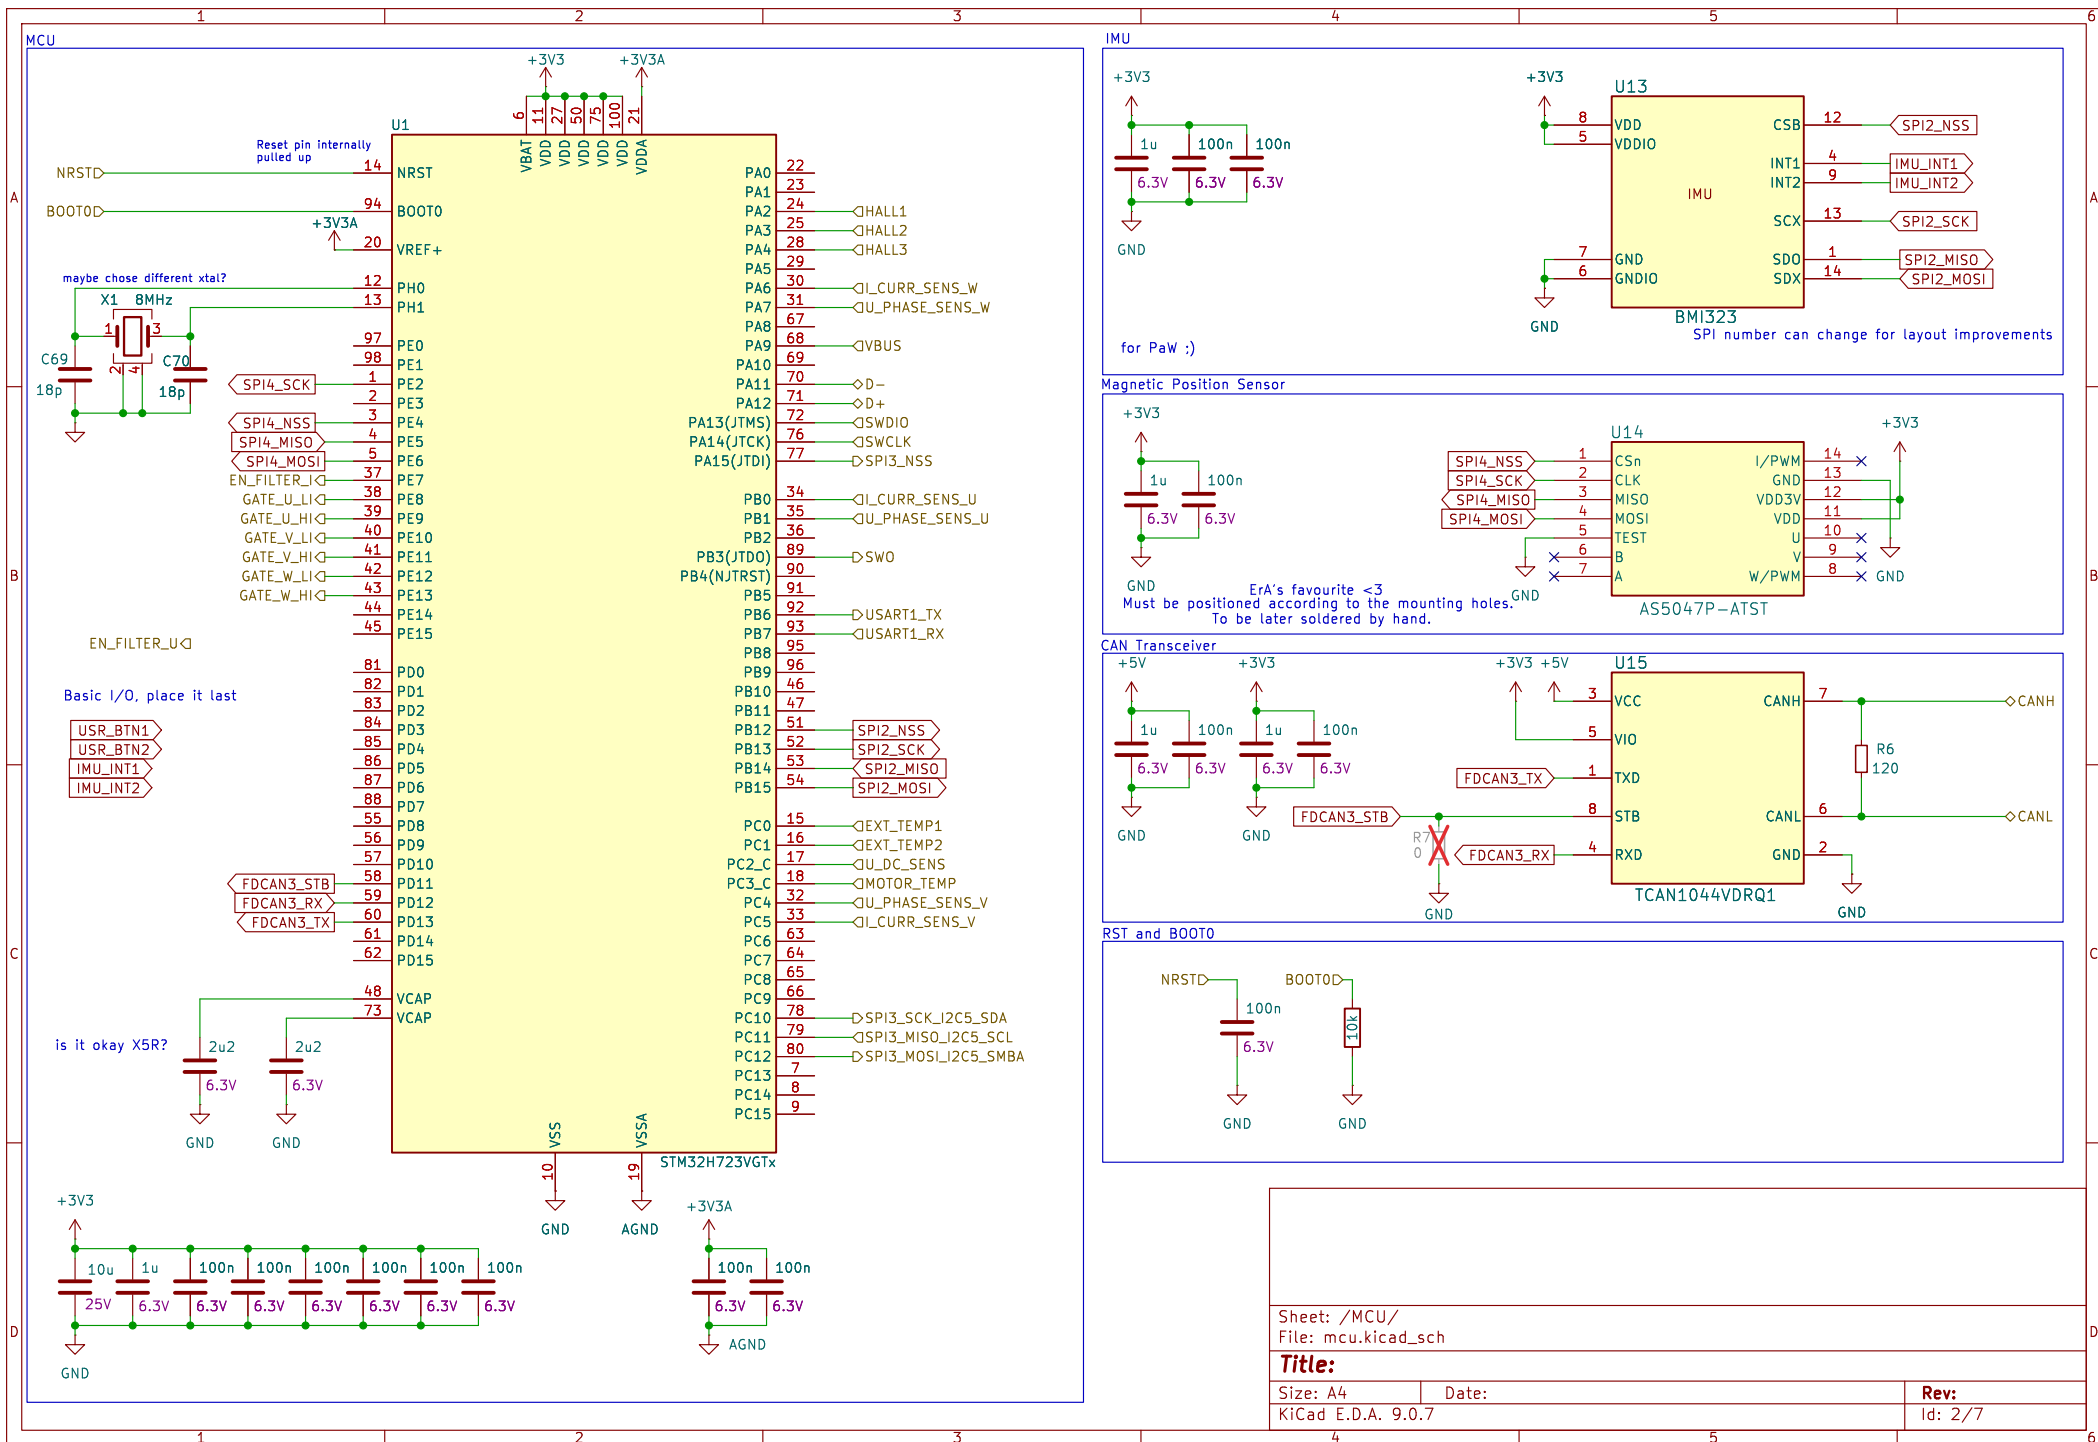


# Buck Converter

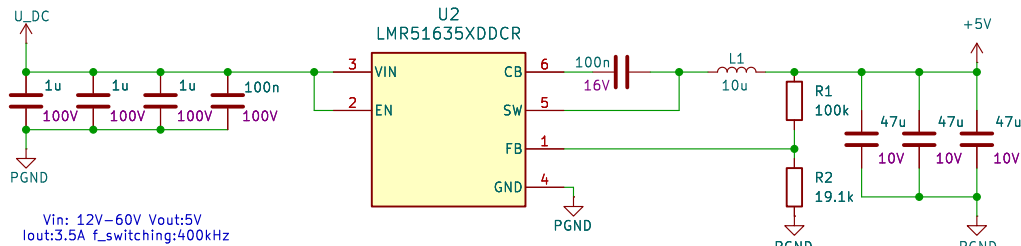


TEXAS  
INSTRUMENTS  
WEBENCH® Design Report

Design: 120 LMR51635DDC  
LMR51635DDC 12V-60V to 5.00V @ 3.5A


VinMin = 12.0V  
VinMax = 60.0V  
Vout = 5.0V  
Iout = 3.5A  
Device = LMR51635DDC  
Topology = Buck  
Created = 2020-01-18 17:57:50.631  
BOM Count = 24.43  
Total PS = 2.47W

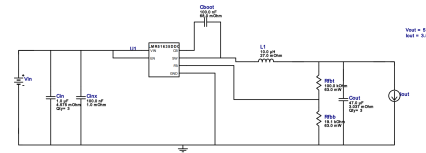


# Low drop-out regulator & GNDA / GND separation

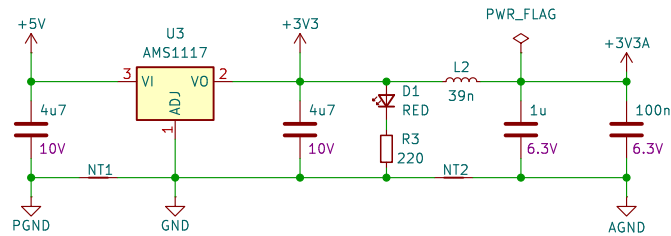

# Bulk Capacitors

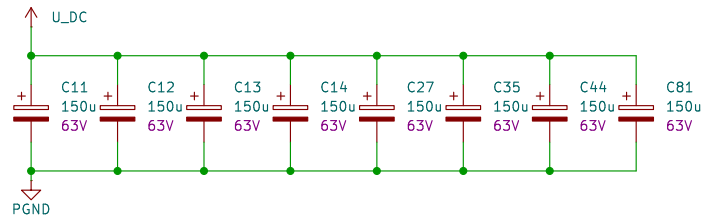

# DC-Link Voltage



Sheet: /Power/  
File: power.kicad\_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 3/7




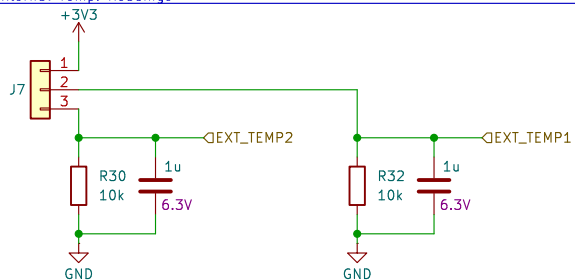


Diagram illustrating the wiring for the J9 connector:

- Pin 1: +5V
- Pin 2: +3V3
- Pin 3: (Unconnected)
- Pin 4: SPI3\_SCK\_I2C5\_SDA
- Pin 5: SPI3\_NSS
- Pin 6: SPI3\_MOSI\_I2C5\_SMBA
- Pin 7: SPI3\_MISO\_I2C5\_SCL
- Ground (GND) connection is shown at the bottom.

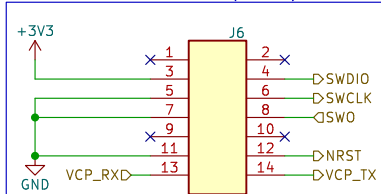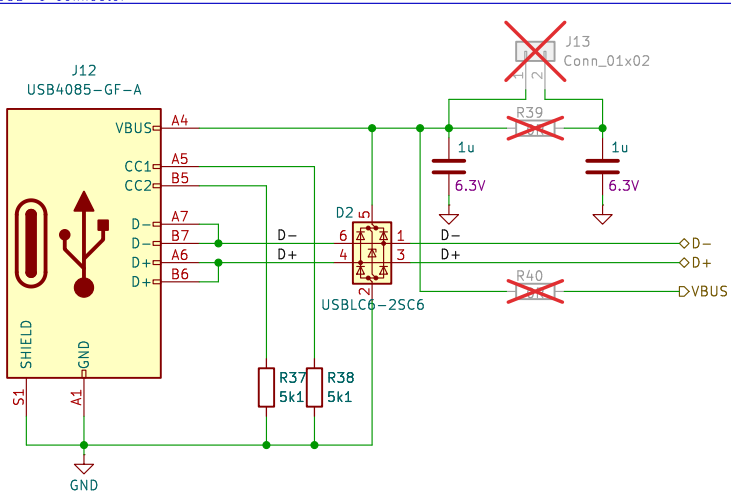

|         |
|---------|
| Rev:    |
| Id: 4/7 |

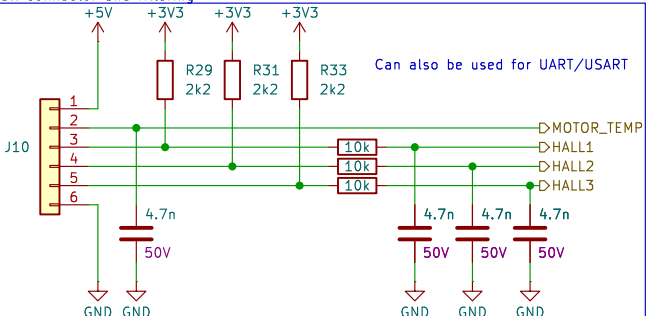



