

XING-E 2809 Cinelifter Motor

Özellikler

Parametre	800KV Sürümü	1250KV Sürümü
Giriş Voltajı	24V (6S)	24V (6S)
Maksimum Akım	25.63A	49.23A
Maksimum Güç	610,3W	1147,1B
Ağırlık (tel dahil)	61 gr	60,4 gr
Faz Arası Direnç	129,3mΩ	65mΩ
Boyutlar	Ø33,2×39,3 mm	Ø33,2×39,3 mm
Mil Capı	5mm	5mm
Mil Cıkıntı Uzunluğu	15,5 mm	15,5 mm
Montaj Delikleri	19×19mm – Ø3mm	19×19mm – Ø3mm
Kurşun Teller	260mm/18AWG	260mm/18AWG
Yapılandırma	12N14P	12N14P
Mıknatıs	N52H Kavisli	N52H Kavisli
Rulman Özellikleri	Ø11×Ø5×5mm	Ø11×Ø5×5mm
Rotor	Parçalı çan	Parçalı çan
Sarma	Tek telli bakır	Tek telli bakır

Performans Veri Sayfası (800KV Versiyonu)

Destek Türü	Gaz kelebeği	Voltaj (V)	Akım (A)	İtme (g)	Güç (W)	Verimlilik (g/W)	Sıcaklık (°C)
Karargah 9×4×3	%100	23.81	25.63	2091	610.3	3.43	69°C


Performans Veri Sayfası (1250KV Versiyonu)

Destek Türü	Gaz kelebeği	Voltaj (V)	Akım (A)	İtme (g)	Güç (W)	Verimlilik (g/W)	Sıcaklık (°C)
Karargah 8×4×3	%100	23.30	49.23	2933	1147.1	2,56	77°C

(Tam grafiklerde kısmi gaz kelebeğiyle ilgili daha fazla veri mevcuttur.)

800KV için


XING-E 2809 800KV	
KV	800KV
Weight (included wire)	61g
Dimension	$\phi 33.2 \times 39.3 \text{mm}$
Interphase resistance	129.3m Ω
Input Volts	24V
Peak Current	25.63A
Max Watt	610.3W
Mounting Holes	19*19- $\phi 3 \text{mm}$
Rotor specifications	Segmented bell
Shaft Diameter	5mm
Shaft Protruding Length	15.5mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing specs	$\phi 11 \times \phi 5 \times 5$
Winding	Single strand copper winding
Package included	M3*11mm screw (4PCS) / M5 Flange Nut (1PCS)

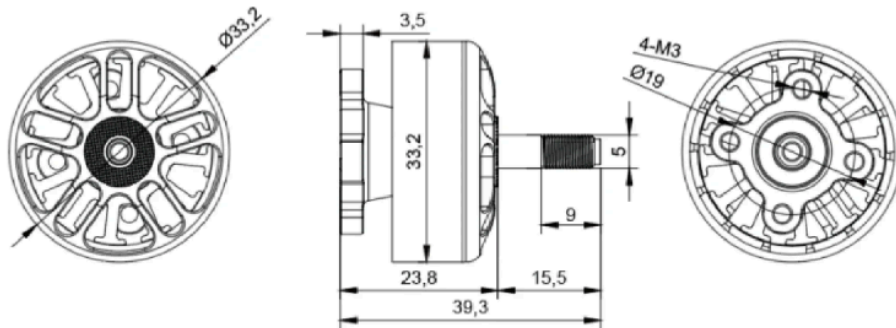

Datasheet								
Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING-E 2809 800KV	HQ 8*4*3	50%	24.12	3.99	520	96.2	5.40	77°C
		60%	24.09	6.14	735	147.9	4.97	
		70%	24.04	8.97	985	215.6	4.57	
		80%	23.99	12.51	1234	300.1	4.11	
		90%	23.93	16.55	1499	396.0	3.78	
		100%	23.90	19.58	1713	468.0	3.66	
	HQ 9*4*3	50%	24.10	5.33	700	128.5	5.45	69°C
		60%	24.06	8.33	973	200.4	4.85	
		70%	24.00	11.96	1273	287.0	4.43	
		80%	23.93	16.55	1561	396.0	3.94	
		90%	23.87	21.66	1856	517.0	3.59	
		100%	23.81	25.63	2091	610.3	3.43	

1250KV için

XING-E 2809 1250KV	
KV	1250KV
Weight (included wire)	60.4g
Dimension	φ33.2*39.3mm
Interphase resistance	65mΩ
Input Volts	24V
Peak Current	49.23A
Max Watt	1147.1W
Mounting Holes	19*19-φ3mm
Rotor specifications	Segmented bell
Shaft Diameter	5mm
Shaft Protruding Length	15.5mm
Lead	260mm/18AWG
Magnet	N52H Curved
Configuration	12N14P
Bearing specs	φ11*φ5*5
Winding	Single strand copper winding
Package included	M3*11mm screw (4PCS) / M5 Flange Nut (1PCS)

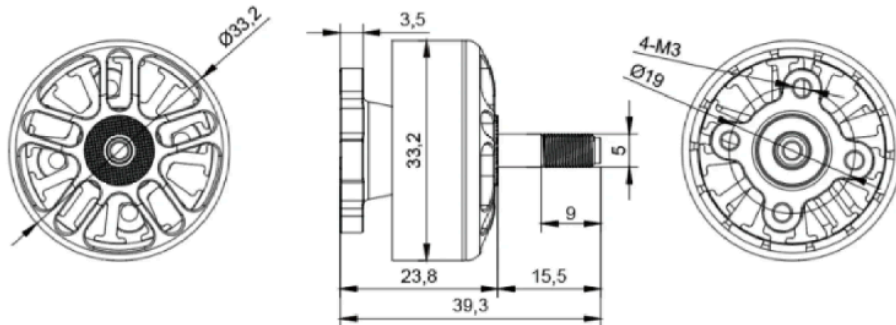

Type	Prop (inch)	Throttle (%)	Voltages (V)	Load Current (A)	Pull (g)	Power (W)	Efficiency (g/W)	Temperature
XING-E 2809 1250KV	HQ 8*4*3	50%	23.88	9.26	994	221.1	4.50	77°C
		60%	23.78	15.62	1409	371.4	3.79	
		70%	23.71	21.45	1726	508.6	3.39	
		80%	23.58	29.85	2158	703.9	3.07	
		90%	23.44	39.27	2564	920.5	2.79	
		100%	23.30	49.23	2933	1147.1	2.56	
	GF 7040	50%	23.94	5.00	579	119.7	4.84	69°C
		60%	23.89	7.77	794	185.6	4.28	
		70%	23.84	11.78	1094	280.8	3.90	
		80%	23.76	17.10	1432	406.3	3.52	
		90%	23.67	23.22	1722	549.6	3.13	
		100%	23.56	30.36	2092	715.3	2.92	