

## Overview

The Steinadler Pro L7e comes in two variants built on one platform: SS (Single Seat) and DS (Double Seat). Chassis, powertrain and battery are identical; the differences lie in the seating layout and the resulting vehicle height, payload, protective structure and accessories.


On the DS, the combined people-plus-cargo budget is 113 kg: 113 kg of cargo alone, or a passenger of up to 113 kg, or the two together within the 113 kg total — a 75 kg passenger, for example, still leaves about 38 kg for cargo. The SS budget is just 30 kg, and it has no second seat for a passenger. **Counting the driver and the battery, the DS raises total load capacity from 137 kg (SS) to 220 kg.**

The Single Seat received EU type approval in June 2025; the Double Seat is being added through the type-approval extension (Ext. 01), applied in June 2026.

| Item              | Single Seat SS | Double Seat DS |
|-------------------|----------------|----------------|
| Seating positions | 1              | 2              |
| Height            | 1325 mm        | 1475 mm        |
| TPMLM             | 310 kg         | 401 kg         |
| Pay mass          | 30 kg          | 113 kg         |

## 1. Seating Layout

The DS adds a passenger saddle behind the front driver saddle (tandem layout, r1 + r2) and raises the roof via the extended steering tube to give the rear occupant headroom. Neither variant is fitted with safety belts (not required for the L7e category).

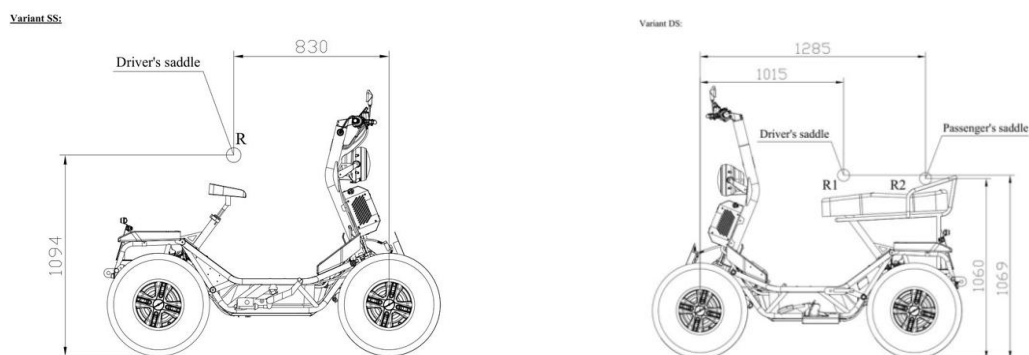

Variant SS: 1 seating position (driver saddle, R point)

Variant DS: 2 seating positions (driver R1 + passenger R2)


| Item                      | Single Seat SS | Double Seat DS                       |
|---------------------------|----------------|--------------------------------------|
| No. of seating positions  | 1              | 2                                    |
| Location & arrangement    | r1: 1C         | r1: 1C, r2: 1C (one front, one rear) |
| Configuration             | Saddle type    |                                      |
| Safety belts & anchorages | Not fitted     |                                      |

## 2. Vehicle Dimensions

Length, width, wheelbase and track are identical — the DS does not use a longer frame or wheelbase; the only difference is vehicle height (+150 mm), from the extended steering tube and the higher roof roll-over protection.

#### Variant SS:


Remark: Version 00 has no coupling device; Version 01 has a coupling device.

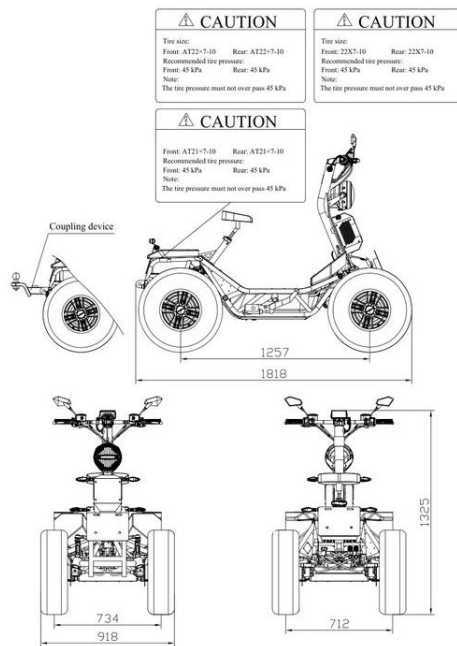

Variant SS dimension drawing

#### Variant DS:

Remark: Version 00 has no coupling device; Version 01 has a coupling device.

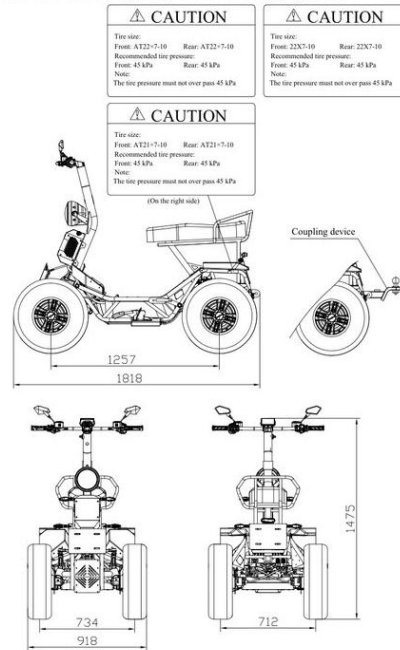

Variant DS dimension drawing (height 1475 mm)

| Dimension     | Single Seat SS | Double Seat DS | Delta   |
|---------------|----------------|----------------|---------|
| Height        | 1325 mm        | 1475 mm        | +150 mm |
| Length        | 1818 mm        | 1818 mm        | Same    |
| Width         | 918 mm         | 918 mm         | Same    |
| Wheelbase     | 1257 mm        | 1257 mm        | Same    |
| Track (front) | 734 mm         | 734 mm         | Same    |
| Track (rear)  | 712 mm         | 712 mm         | Same    |

## 3. Masses & Payload

The DS's mass in running order is only 8 kg higher than the SS, but TPMLM rises by 91 kg and the rear-axle limit by 90 kg, to suit the second occupant and rear load-carrying; maximum pay mass rises from 30 kg to 113 kg.


| Mass                  | SS/00  | SS/01  | DS/00         | DS/01         | SS/00 vs DS/00  |
|-----------------------|--------|--------|---------------|---------------|-----------------|
| Mass in running order | 173 kg | 178 kg | 181 kg        | 186 kg        | +8 kg           |
| Front / rear          | 96/77  | 97/81  | 97/84         | 98/88         | Rear axle +7 kg |
| Actual mass           | 280 kg | 285 kg | 288 kg        | 293 kg        | +8 kg           |
| <b>TPMLM</b>          | 310 kg | 315 kg | <b>401 kg</b> | <b>406 kg</b> | <b>+91 kg</b>   |
| Front axle max        | 150 kg | 151 kg | 151 kg        | 152 kg        | +1 kg           |
| <b>Rear axle max</b>  | 160 kg | 164 kg | <b>250 kg</b> | <b>254 kg</b> | <b>+90 kg</b>   |
| <b>Max. pay mass</b>  | 30 kg  | —      | <b>113 kg</b> | —             | <b>+83 kg</b>   |
| Battery mass          | 32 kg  | 32 kg  | 32 kg         | 32 kg         | Same            |
| Hill-starting ability | 35°    | 35°    | 35°           | 35°           | Same            |

Note: Version 00 has no coupling device; Version 01 has a coupling device.


## 4. Structural Differences

- **Extended steering tube** — the DS uses an extended steering tube to raise the roof (+150 mm) and suit the rear occupant; this is the only steering-system difference.
- **Rear protective structure** — the DS uses a wider rear protection beam: the middle section B grows from 340 mm (SS) to 490 mm, while the side sections A and C stay at 182 mm each; the total width still meets the  $\geq 2/3$  rear-track requirement. Drawing 28-01 (SS):  $182+340+182 \geq 2/3 \times 894 = 596$ ; drawing 28-02 (DS):  $182+490+182 \geq 596$ .
- **Passenger footrest** — the DS adds a dedicated passenger footrest drawing (36-02, page 65), issued separately from the driver footrest (36-01, page 64); the passenger footrest is at the rear wheel, below the passenger saddle.

Variant SS:

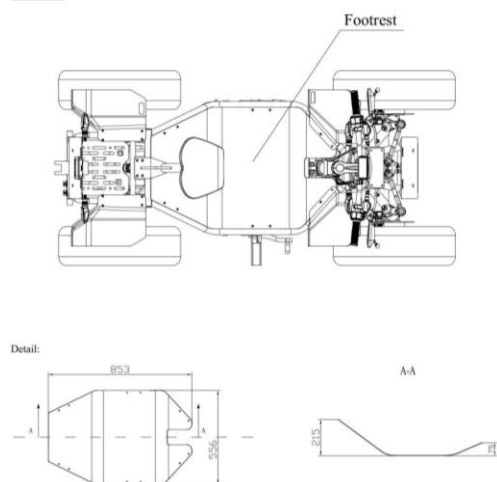

Variant DS:

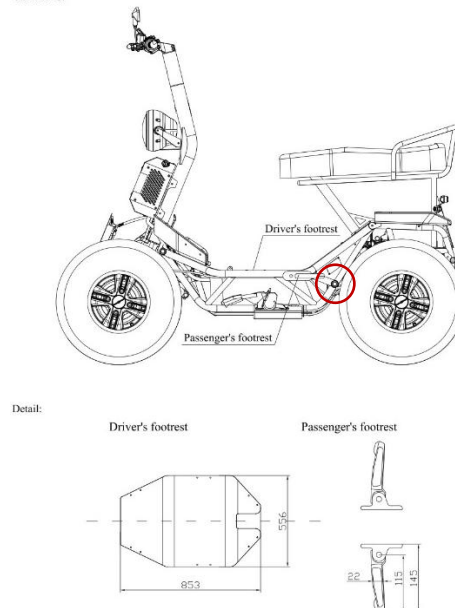

Variant SS: driver footrest only (1)

Variant DS: driver + passenger footrests (2)

- **Passenger hand-hold** — the DS adds a passenger hand-hold drawing (43-01, page 71); on the SS this item is marked “Not applicable” in the type-approval test file (no passenger seat, so none required).
- **Rear-view mirrors** — the SS mirror installation drawing is 32-01 (page 58); the DS has its own drawing 32-02 (page 59), with the mounting position adjusted to the seating layout.

## 5. Tyres & Coupling Device

The DS extension adds two tyre options and raises the rear tyre load index to match the higher rear-axle load; it also adds Version 01 (with coupling device).

| Item             | Single Seat SS (original approval, version 00)     | Double Seat DS (after extension)                                                                                  |
|------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Tyre options     | ① AT22×7-10 35L<br>(rolling circumference 1755 mm) | ① AT22×7-10 35L (1755mm)<br>② 22X7-10 45N (1755mm, new)<br>③ AT21×7-10 48J (1673mm, new)                          |
| Rear load index  | SS/00: 20 (80 kg)<br>SS/01: 21 (82.5 kg)           | DS/00: 36 (125 kg)<br>DS/01: 37 (128 kg)                                                                          |
| Front load index | SS/00: 18 (75 kg)<br>SS/01: 19 (77.5 kg)           | DS/00: 19 (77.5 kg)<br>DS/01: 19 (77.5 kg)                                                                        |
| Coupling device  | Version 00: none                                   | New with Version 01: SS/01 tows 89 kg<br>(combination mass 404 kg); DS/01 tows 93 kg<br>(combination mass 499 kg) |

## 6. Performance & Powertrain

Powertrain, battery and most performance figures are shared; only energy consumption is slightly higher on the DS due to its extra mass (+3 Wh/km).

| Item                     | Specification (applies to SS / DS unless noted)                                             | Compare  |
|--------------------------|---------------------------------------------------------------------------------------------|----------|
| Motor                    | 4× hub motors QSMOTOR QS60V1500W (one per wheel, permanent-magnet brushless DC)             | Same     |
| Continuous power         | 1.5 kW × 4 = 6.0 kW @ 785 min <sup>-1</sup> ; peak 3.5 kW per motor @ 870 min <sup>-1</sup> | Same     |
| Battery                  | Lithium battery 74.4 V / 55 Ah / 20 cells / 32 kg                                           | Same     |
| Max. speed               | 70 km/h                                                                                     | Same     |
| Electric range           | 51 km                                                                                       | Same     |
| Energy consumption       | SS: 92 Wh/km<br>DS: 95 Wh/km                                                                | +3 Wh/km |
| Brakes                   | CBS combined braking + front/rear secondary brakes + parking brake                          | Same     |
| Lights / steering / horn | K-LITE & KYI lights;<br>steering angle 27° right / 26° left; HELLA horn                     | Same     |

## 7. Type-Approval Status

The Double Seat is not a new type approval: it is incorporated into the approved whole-vehicle type approval as an extension.

### Single Seat SS — initial approval (applied 2025-02-22 · issued 2025-06-03)


- EU type-approval number: **e13\*168/2013\*02582\*00**
- Approval authority: SNCH (Luxembourg, Bertrange)
- Technical service: CETOC Technical Service s.r.l. (Rome, Italy)
- Test report: CN-117-2-196-WHO25-26174-IR (full measured set: brakes, top speed, energy consumption, etc.)
- Variant 00 (single seat, later renamed SS), Version 00

### Double Seat DS — extension (applied 2026-06-07, Ext. 01)

- **Extension number: e13\*168/2013\*02582\*01**
- New Variant DS added (former Variant 00 renamed SS)
- New Version 01 added (with coupling device)
- 2 new tyre options added, new Make added
- Regulatory basis updated to Reg. (EU) 2024/2838; assembly plant address updated

## 8. VIN Coding

The extension also updates the VIN coding rules (Ext. 01 amendment item 6); SS and DS are distinguished by VIN positions 7 and 8. The VIN is hammered into the right side of the frame (coordinates R: x 460, y 240, z 240), character height 8 mm, depth 0.2 mm.

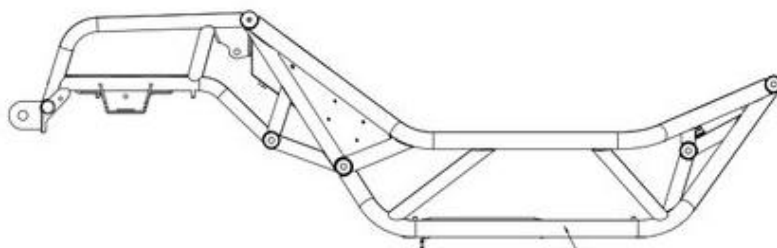

VIN: ☆H2XAAA????1????☆  
 Hammered on the right side of frame  
 Text height: 8 mm  
 Text depth: 0.2 mm  
 R: x 460, y 240, z 240

☆ H 2 X A A A ? ? ? ? 1 ? ? ? ? ? ? ☆

Product serial number

Assembly plant

Product year ,  
 T:2026, V:2027 ...

Check digit

**Version:**  
**Version 00=B, Version 01=A**

**Variant:**  
**Variant SS=A, Variant DS=B**

Type of drive

Type of power

Type of vehicle

WMI

- R: right side of the vehicle
- x: horizontal distance (mm) from the front-most axle
- y: horizontal distance (mm) from the longitudinal centre line of the vehicle
- z: distance (mm) from the ground

|                                                       |                      |
|-------------------------------------------------------|----------------------|
| Vehicle Type                                          | Steinadler Pro       |
| Location and details of vehicle identification number |                      |
| Drawing No.                                           | Steinadler Pro-02-01 |

VIN location and coding structure

| VIN position<br>(positions 1–17) | Meaning                           | Value                          | Remark                           |
|----------------------------------|-----------------------------------|--------------------------------|----------------------------------|
| 1 – 3                            | WMI World Manufacturer Identifier | H2X                            | Fixed                            |
| 4                                | Vehicle type                      | A                              | Fixed                            |
| 5                                | Power type                        | A                              | Fixed (electric)                 |
| 6                                | Drive type                        | A                              | Fixed                            |
| 7                                | Variant                           | SS = A; DS = B                 | Distinguishes single/double seat |
| 8                                | Version                           | 00 = B; 01 = A                 | 01 = with coupling device        |
| 9                                | Check digit                       | Calculated per formula         | Shown as “?” on drawings         |
| 10                               | Production year                   | Letter code: T=2026, V=2027... | Progresses with ISO year code    |
| 11                               | Assembly plant                    | 1                              | Fixed                            |
| 12 – 17                          | Serial number                     | 6 digits                       | Increments per vehicle           |

| Variant / Version                  | VIN pattern        | Position 7 | Position 8 |
|------------------------------------|--------------------|------------|------------|
| SS / 00 (single seat, no towing)   | ☆H2XAAAAB??1?????☆ | A = SS     | B = 00     |
| SS / 01 (single seat, with towing) | ☆H2XAAAAA??1?????☆ | A = SS     | A = 01     |
| DS / 00 (double seat, no towing)   | ☆H2XAAABB??1?????☆ | B = DS     | B = 00     |
| DS / 01 (double seat, with towing) | ☆H2XAAABA??1?????☆ | B = DS     | A = 01     |

The original single-seat approval (version 00) used VIN pattern ☆H2XAAAVC??1?????☆; the extension updates it to the rules above (including variant/version letter codes). For production vehicles the current rules apply, consistent with the statutory plate and the CoC.