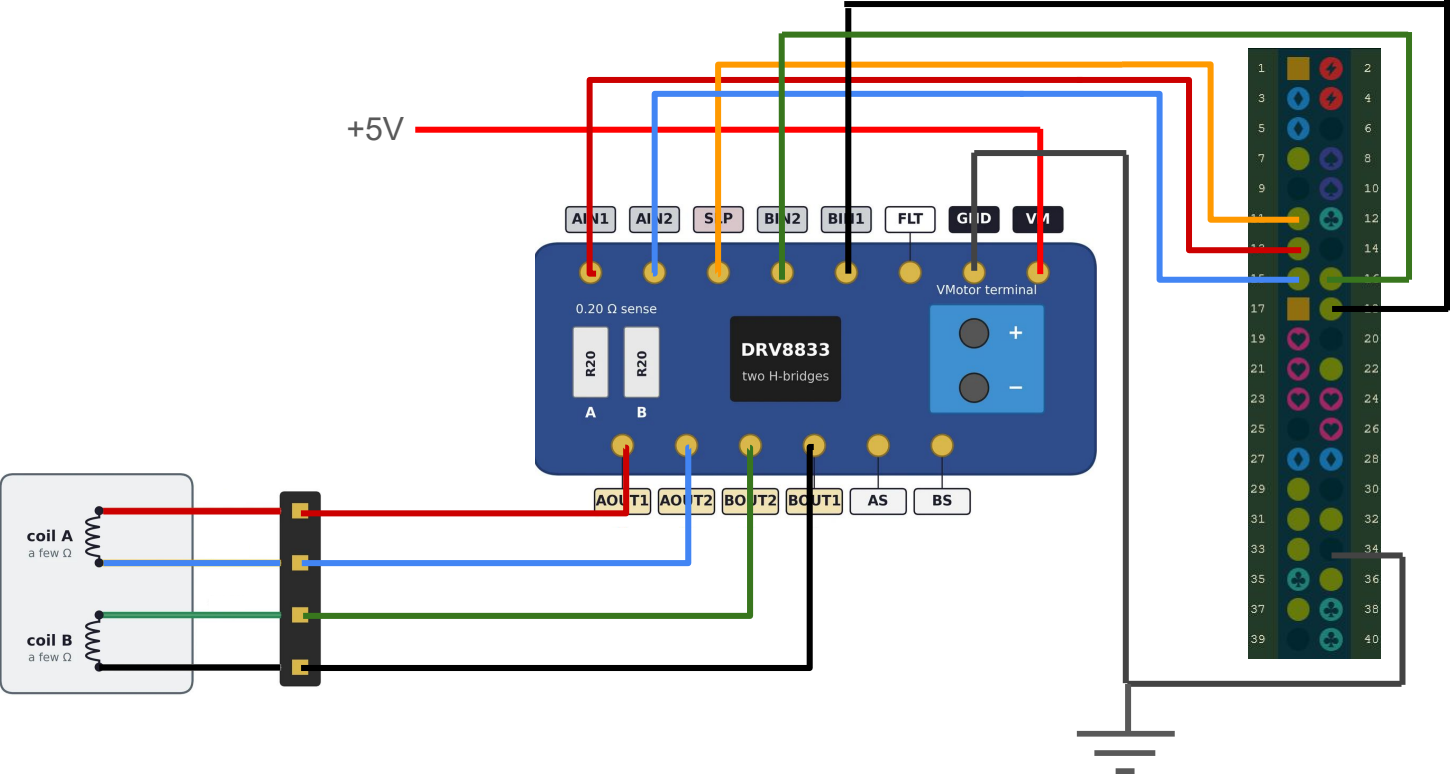

+5V
AIN1
AIN2
SLP
BIN2
BIN1
FLT
GND
VM
VMotor terminal
0.20 Ω sense
R20
R20
A
B
DRV8833
two H-bridges
+
−
AOUT1
AOUT2
BOUT2
BOUT1
AS
BS
coil A
a few Ω
coil B
a few Ω