# Cruise Control Software Development Version 0.03

Eric Altenburg, Michael McCreesh, Hamzah Nizami, Constance Xu<br/> Stevens Institute of Technology

CS 347 — Software Development Process

I pledge our honor that I have abided by the Stevens Honor System.

# Contents

1	Intr	$\mathbf{roduction}$																3
2	Req	uirements	; .															6
	2.1	Input																6
	2.2	Output .																6
	2.3	Functional																6
	2.4	Security .																7

#### **Executive Summary**

Team Mike is a startup initiative aimed at solving problems that come to light as society begins to adopt new technologies. One of which pertains to autonomous driving and "smart cars" as they are beginning to break into the automobile market more and more every year with examples such as Tesla and Ford. In a perfect world, if every driving car were to be a smart car with "autopilot," then it would make sense for each of them to communicate cruise control data with each other to reduce traffic build-up and make traveling more efficient. Through rotational leadership on a monthly basis, each team member possesses a set of distinct skills that can translate to highly efficient work sessions. Aside from developing a traditional cruise control, it can sense other cars' locations and communicate information, which will allow autonomous cars to fully achieve their potential within a growing technologically advanced society.

### 1 Introduction

The past century has seen an explosion of innovation on a scale never before seen in human history. The rapid development and refinement of a myriad of motor technologies catalyzed the innovation process by allowing ideas to transfer at rates never before seen. With the constraint of distance loosening thanks to every iteration of the automobile, people have been granted more freedom to do what they please. While the automobile has enhanced society in several ways, there are some glaring problems that need to be addressed to continue the current rate of human progress and innovation. One of the biggest problems is driver fatigue, which is responsible for approximately 72,000 crashes annually. Programming the automobile to be reliably autonomous to a degree is one way to circumvent the issue of driver fatigue and making roads safer. That's exactly what cruise control aims to do. By moderating the speed of the vehicle by itself, cruise controls aim to lessen the effects of driver fatigue on the road. However, the technology is not perfect, and Team Mike aims to resolve that by creating the perfect cruise control system.

When it was implemented in 1958, cruise control was suitable for that era, however, as technology continually improves, the embedded software must as well. With more advanced sensors, it is now possible to be able to sense where surrounding vehicles are at all times, and with this, the overall safety of the passenger can be increased while allowing them to have a more enjoyable ride. For longer car trips, it does not make sense for users to constantly accelerate and decelerate for several miles; this is where cruise

control comes in. By being able to set the speed, the user is now able to accurately set and maintain the speed they wish to without having to constantly intervene which, over time, would cause less harm to the vehicle as variable speed and RPMs are not as desirable as that of near-constant.

Our group intends to use an Agile method to implement our version of cruise control. This would encourage code sprints in two-week lengths where work will be divided into smaller sections and distributed based on each members' strengths. The Agile method may vary as to which one we specifically choose but regardless, this project will not come to fruition using Waterfall or other methods. The way that we are going to organize our group is through weekly meetings and ensuring that everyone knows their tasks for the week. These weekly meetings can also serve as a place where team members mention any obstacles that have come in their way when trying to resolve a problem, and also serve as a time where the team as a collective can try to think of solutions around those obstacles. We also plan on giving real-time updates about any progress made through Slack in order to ensure all members of the team are equipped with the most recent developments of the project. We also intend on using Java or C++ to implement our cruise control system. We believe that the high-performance Java provides and the fact that its part of the Object-Oriented Programming (OOP) paradigm makes it perfect for embedded systems.

There are a plethora of features that make up cruise control. As most cruise controls are seen on vehicles, there are generally a few buttons: increase speed (and sometimes decrease speed) and the button that starts cruise control. Once cruise control is set, the user then has the ability to increase, decrease, or maintain the speed of a vehicle. Furthermore, if the user presses on the brake, then cruise control is automatically deactivated. The system also allows for the operator of a vehicle to manually deactivate it. A useful feature that we intend on implementing is maintaining a safe distance away from the car in front of the vehicle, hence creating more of an autopilot mode as opposed to a cruise control scenario.

To successfully implement the features of maintaining a steady speed and a safe distance away from other cars, there are certain requirements to fulfill. At a high level, proper hardware with fast, reliable sensors is critical for this project. Furthermore, lives are fundamentally dependent on this product and therefore it requires software that is error-resistant and thus a strong development and QA (quality assurance) team. In addition, the software must also perform it's expected tasks of moderating speed, maintaining a safe distance and switching back control to the driver when prompted to quickly. Having a cruise control software that is slow would be ineffective,

so speed and accuracy are critical requirements for the software as well as the hardware. This is a mission-critical system because if it were to fail, it would put the lives of people in danger.

## 2 Requirements

### 2.1 Input

- 1. The power button that allows for the state of the system to change
  - (a) From on to off or vice versa
- 2. Button to set speed
- 3. A button to select either accelerate or decelerate
- 4. Have the brake to be an alternate method of turning off the system
- 5. If the entire car turns off, then a signal will be sent to turn off the system that is separate from the car shutdown

### 2.2 Output

- 1. Keep a log of activity to help debug in the event of a malfunction
- 2. The system displays successful activation or deactivation

#### 2.3 Functional

- 1. Able to increase and decrease the speed by 1 mph
- 2. Able to switch cruise control on or off provided the engine is on
- 3. Only allow the cruise control to be activated when at a minimum speed of 25 mph
- 4. Given a speed by the user, the cruise control software maintains the speed provided
- 5. An example can be seen in Figure 1: The user has requested for the cruise control to power on, in doing so, the system provides feedback through activation of say a light on the dashboard. Then the user can set the velocity where the system will then send a request to the throttle waiting for feedback, once received, it will then request an update from the sensors for the speedometer. The same concept is used when the user would like to increase or decrease the velocity; send a request to the throttle and upon feedback, request information from the sensors for up-to-date information. For powering off, once

the user either presses the brake or off button, then it will remove the set throttle request made earlier from a velocity set and then give the user feedback upon successful throttle set removal.

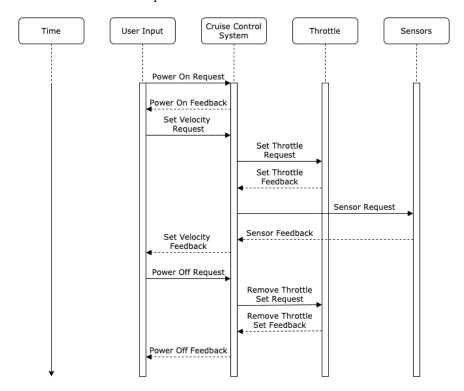


Figure 1: Sample UML diagram for cruise control activation, velocity set, and deactivation.

## 2.4 Security

- 1. No external interface to reduce potential tampering
- 2. No internet or bluetooth connection
- 3. An admin will need hardware to make changes to the mechanisms