


GARAGE · SECTION + FRAMING PLAN


Matching member names · all beam and truss bottoms at 8' 2½" · columns carry the loads

01 WEST SECTION — LOOKING EAST

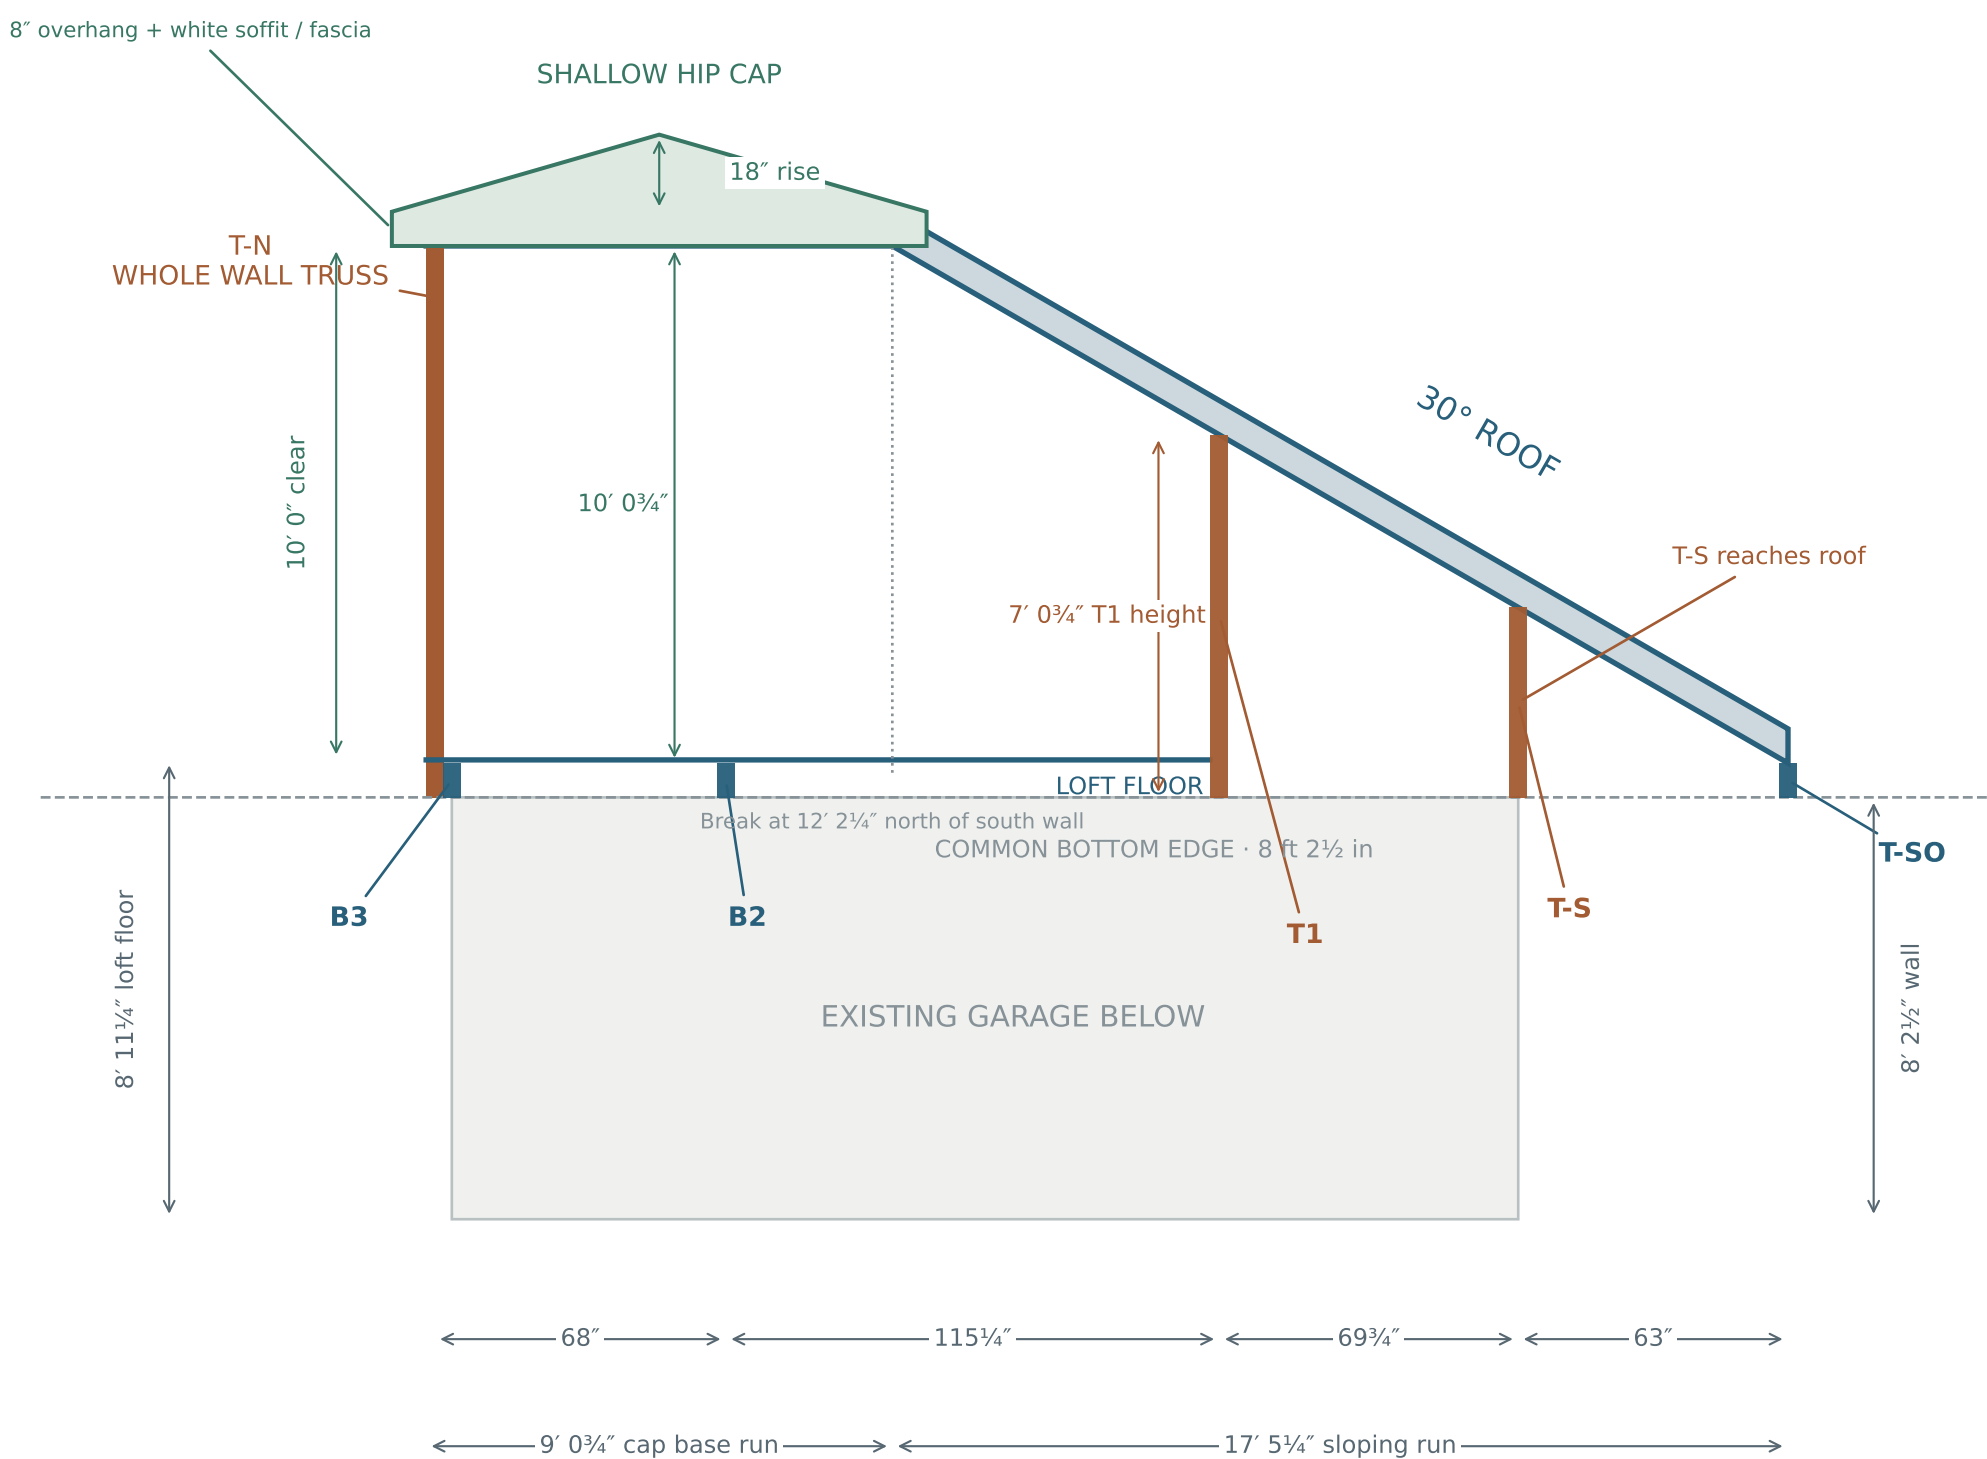

02 TOP-DOWN FRAMING PLAN — NORTH UP

Orange = truss Blue = beam Green dashed = hip cap outline / hips. T-SO is a BEAM.

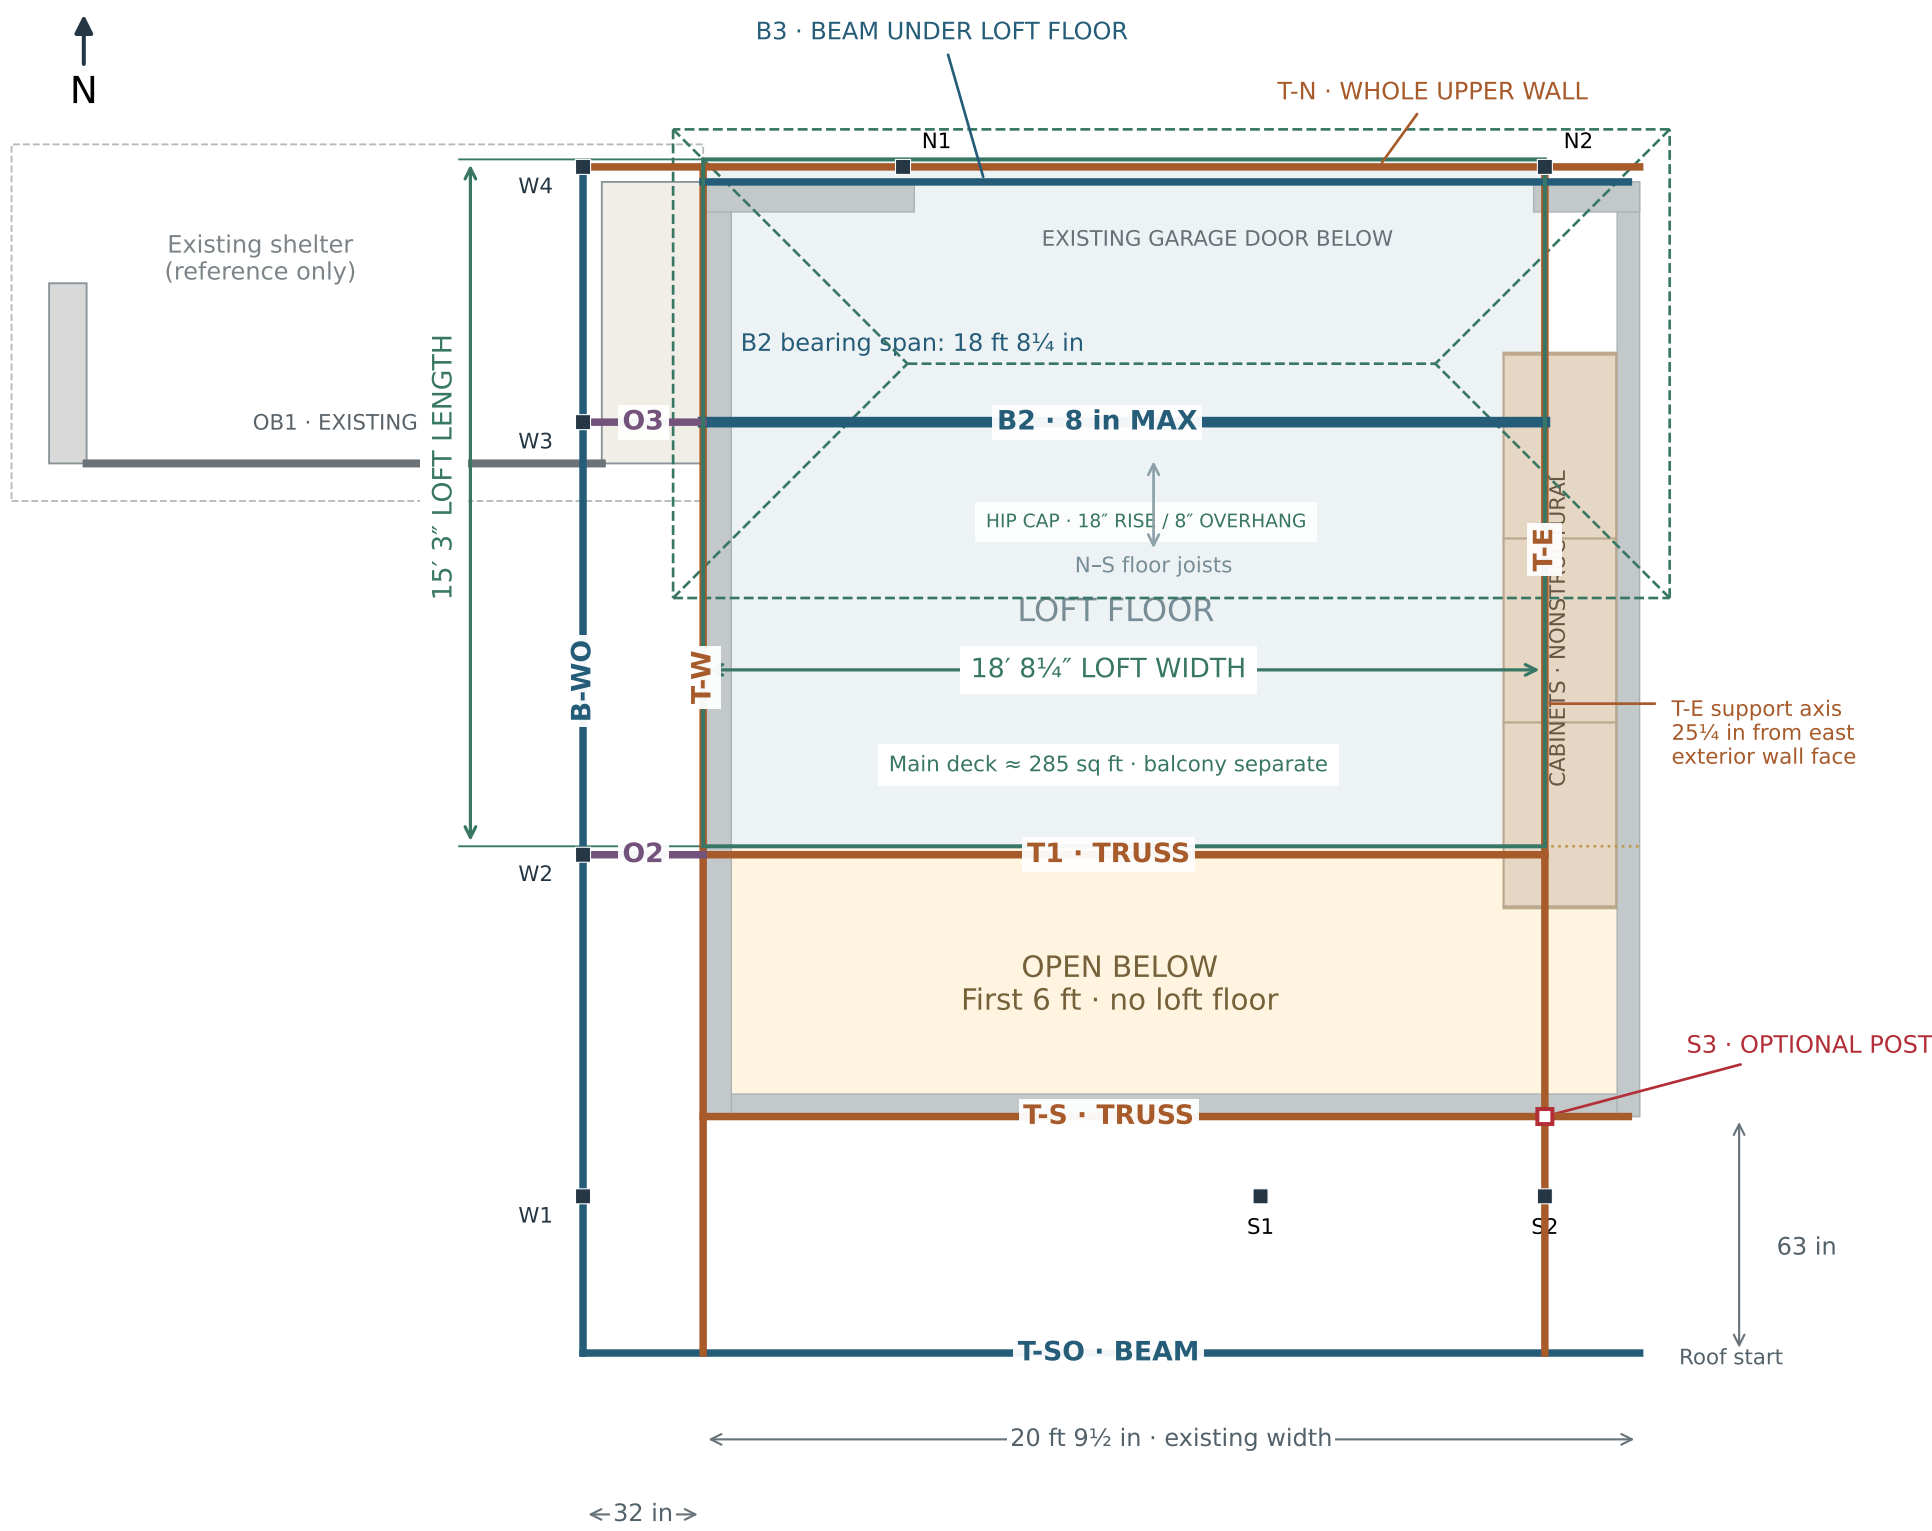

MEMBER REGISTER

T-S	Wall-top datum truss · reaches roof
T-E	East truss · aligned S2 / S3 / N2
T-W	West wall truss
B3	North wall BEAM · under loft floor
T-SO	Southernmost BEAM · common datum
T1	Truss · wall-top datum to roof
B2	Main loft beam · 8 in max depth
T-N	North wall truss · includes loft door
B-WO	West outer longitudinal beam
O2 / O3	Transfers from west wall to outer posts
OB1	Existing shelter front beam

DRAWING BASIS

- S2 moved east 12¾ in to align with N2.
- Gray = existing walls; brown fill = cabinets.
- Hollow red S3 = optional 4-inch post.
- Solid orange = truss; B-S removed.
- Truss depth is vertical, not plan width.
- All bottoms = wall top; columns carry loads.


T1 replaces B1 and reaches the roof. T-N is the whole north upper-wall truss. B3 is the north beam below the loft floor. B-S is removed.

Roof: 30° from T-SO, then 18-in hip cap with 8-in overhang / fascia. Rear ceiling remains 10 ft above trial loft floor.

T-W / T-E / B-WO are outside the interior section cut and appear in plan. South support-row / T-SO connections remain unresolved; sizes are conceptual.

T-S · TRUSS ELEVATION

West → east · dimensions along the framing line · member layout projected directly from the current 3D model

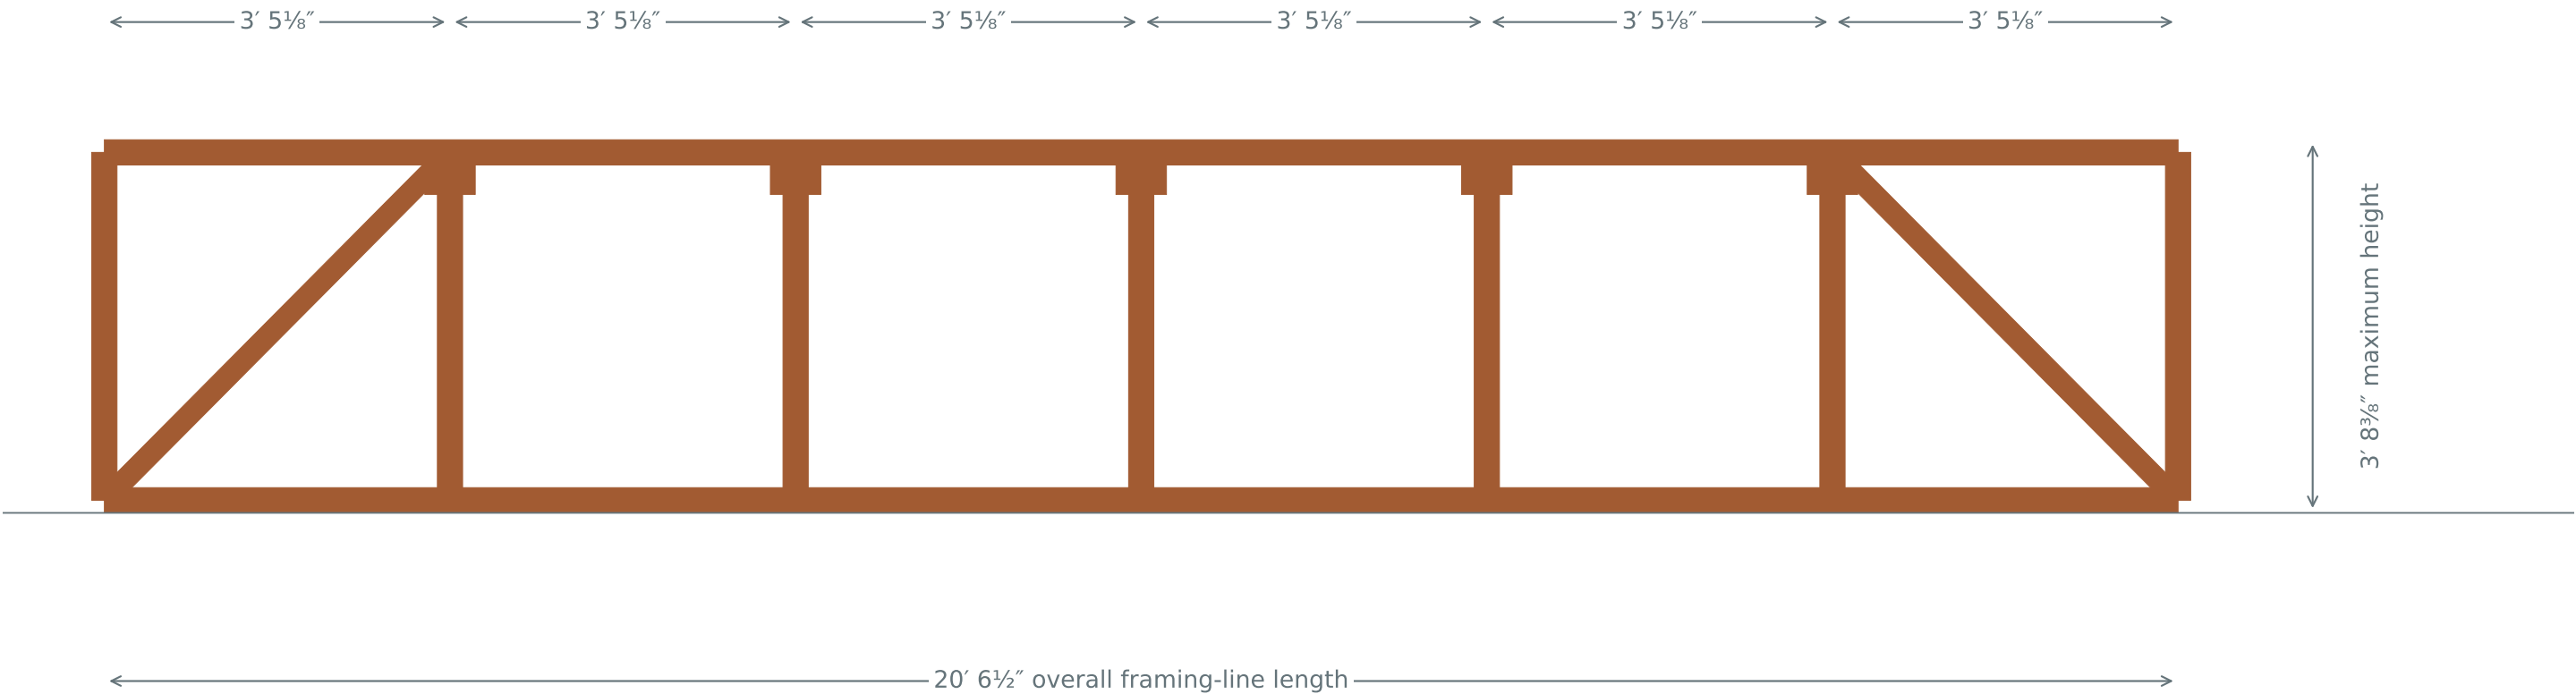


COMMON BOTTOM = 8' 2½" ABOVE GROUND · COLUMN-SUPPORTED

Six equal panel bays; dimensions are centerline spacing, not clear openings.
Model layout: verticals throughout; diagonals in the two end bays; central storage bays open.
At station 0" (south wall).
End-braced rectangles require engineered moment joints / Vierendeel action; web layout is illustrative.

Concept geometry, not fabrication drawings. Member sizes, joints, bracing and bearing details require design.
The shallow hip roof cap sits above the rear ceiling datum; its internal framing has not been laid out.

T1 · TRUSS ELEVATION

West → east · dimensions along the framing line · member layout projected directly from the current 3D model

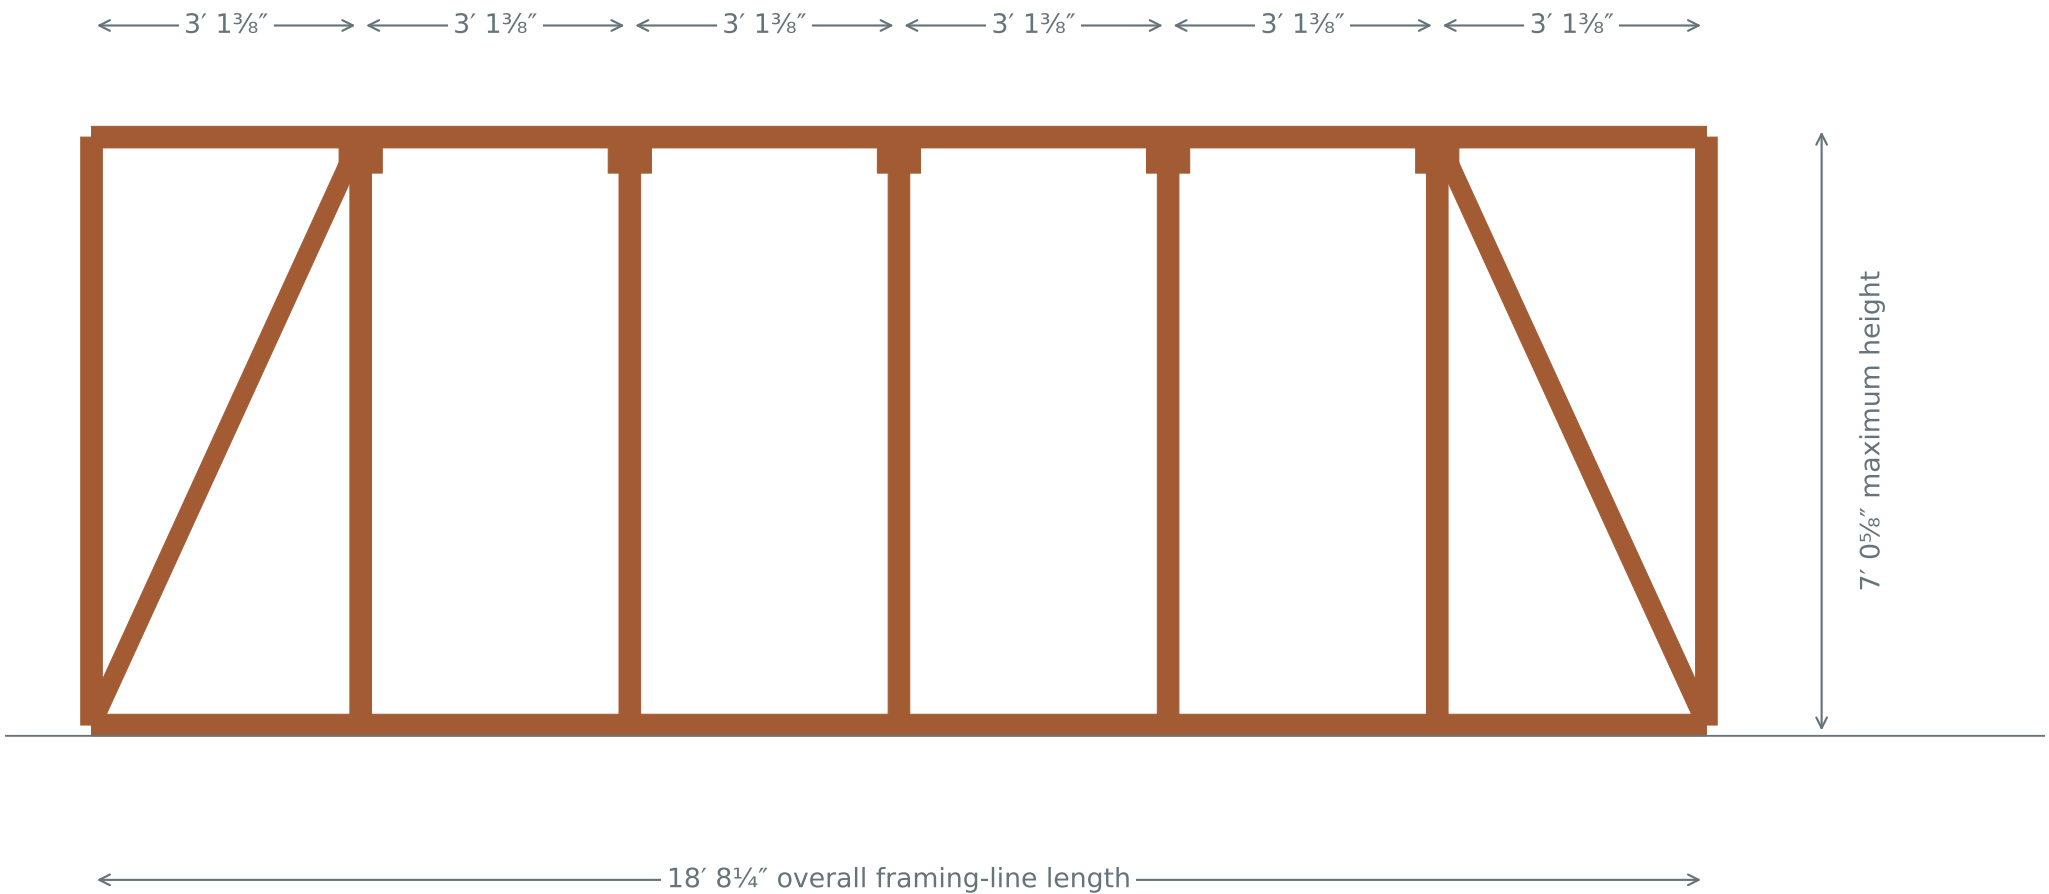


COMMON BOTTOM = 8' 2 1/2" ABOVE GROUND · COLUMN-SUPPORTED

Six equal panel bays; dimensions are centerline spacing, not clear openings.
Model layout: verticals throughout; diagonals in the two end bays; central storage bays open.
At station 69 3/4" north of south wall.
End-braced rectangles require engineered moment joints / Vierendeel action; web layout is illustrative.

Concept geometry, not fabrication drawings. Member sizes, joints, bracing and bearing details require design.
The shallow hip roof cap sits above the rear ceiling datum; its internal framing has not been laid out.

T-W · TRUSS ELEVATION

South → north · station zero = south exterior garage wall · member layout projected directly from the current 3D model

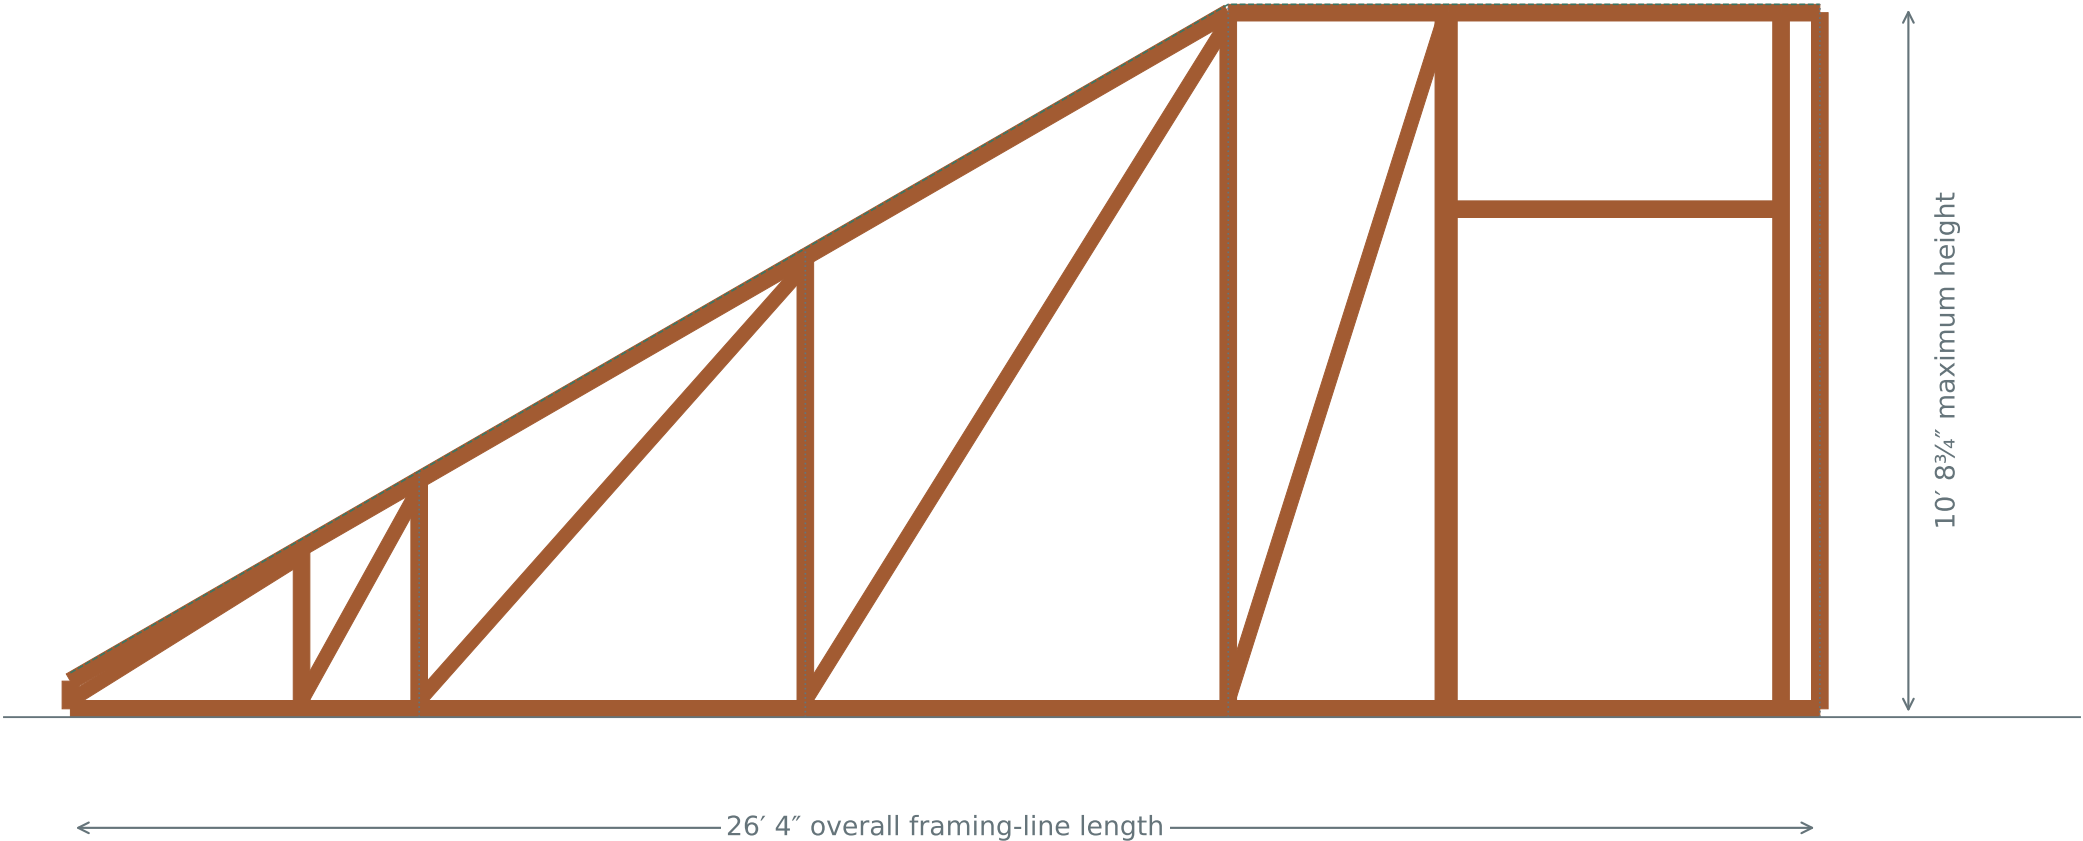

COMMON BOTTOM = 8' 2½" ABOVE GROUND · COLUMN-SUPPORTED

UPRIGHT STATIONS FROM SOUTH WALL (in): -63, -21.25, 0, 69.75, 146.15, 185, 186, 246, 253

PANEL SPACINGS (in): 41.75, 21.25, 69.75, 76.4, 38.85, 1, 60, 7


DEPTHS: south tip 8"; south wall 3' 8⅜"; at T1 7' 0⅝"; plateau 10' 8¾".

West door header is included. Closely spaced uprights at 185 / 186 in are retained from the model; opening framing needs coordination.

Concept geometry, not fabrication drawings. Member sizes, joints, bracing and bearing details require design.
The shallow hip roof cap sits above the rear ceiling datum; its internal framing has not been laid out.

T-E · TRUSS ELEVATION

South → north · station zero = south exterior garage wall · member layout projected directly from the current 3D model

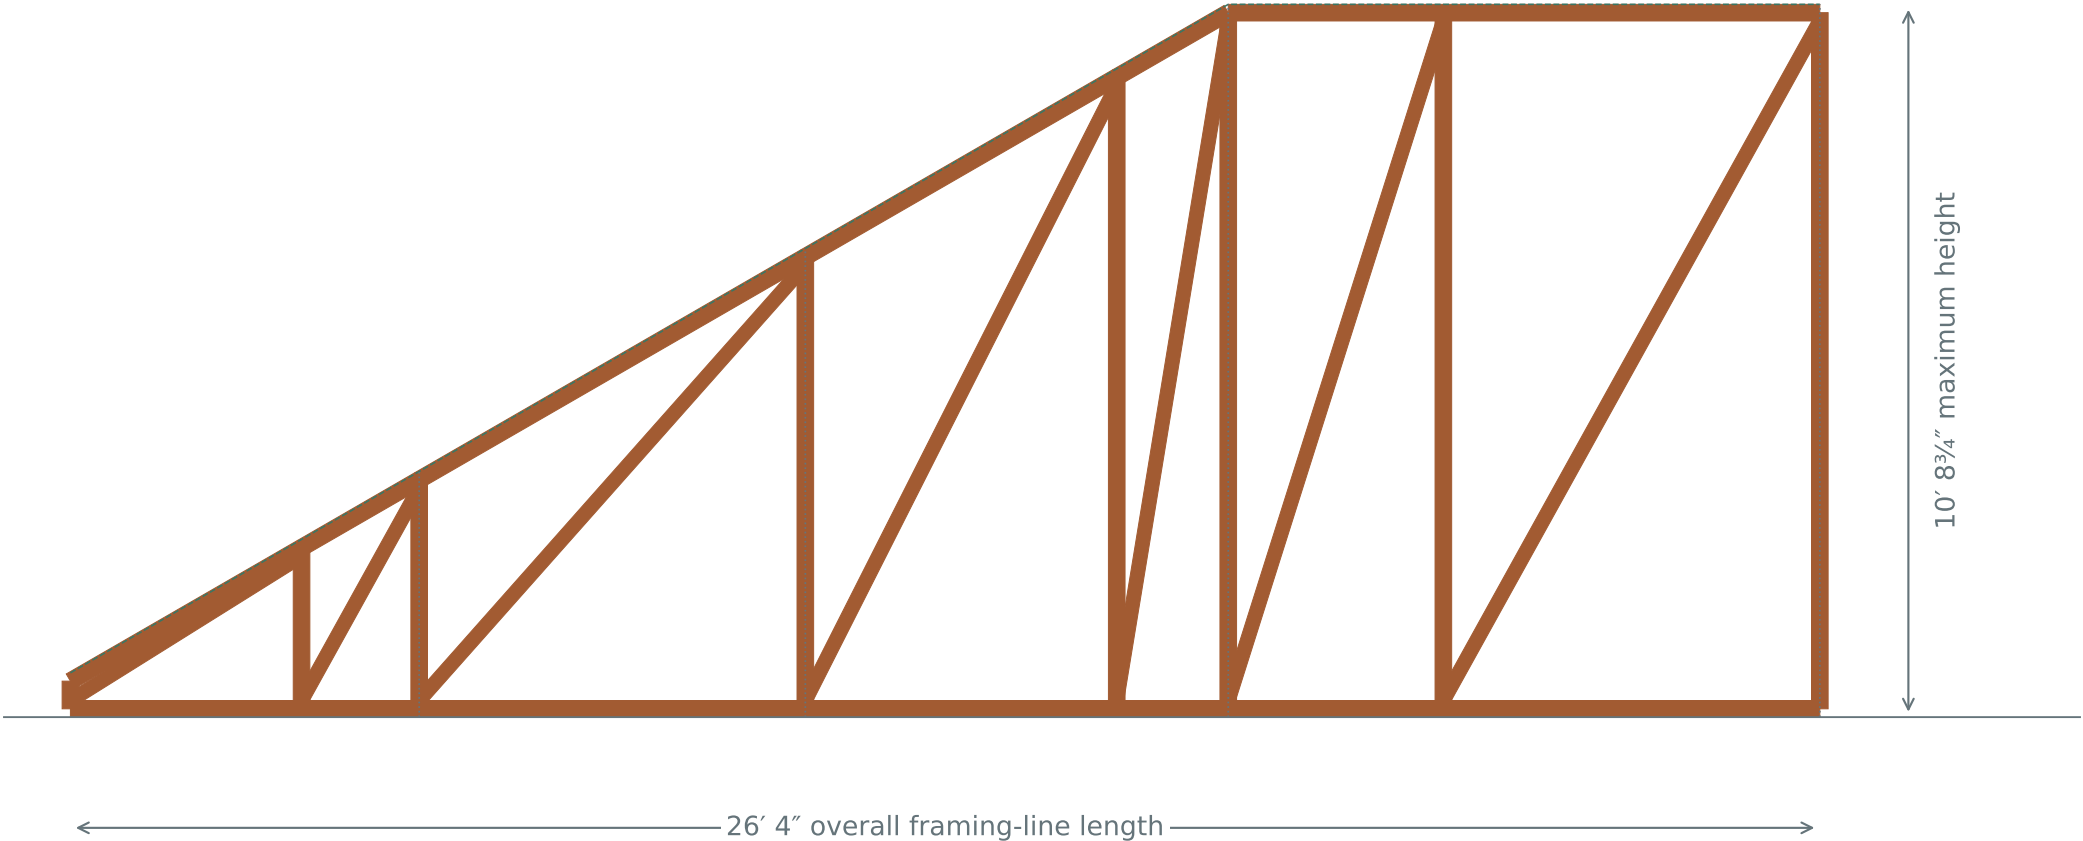


COMMON BOTTOM = 8' 2½" ABOVE GROUND · COLUMN-SUPPORTED

UPRIGHT STATIONS FROM SOUTH WALL (in): -63, -21.25, 0, 69.75, 126, 146.15, 185, 253
PANEL SPACINGS (in): 41.75, 21.25, 69.75, 56.25, 20.15, 38.85, 68
DEPTHS: south tip 8"; south wall 3' 8⅜"; at T1 7' 0⅝"; plateau 10' 8¾".
Support axis: N2 / S2 / optional S3.

Concept geometry, not fabrication drawings. Member sizes, joints, bracing and bearing details require design.
The shallow hip roof cap sits above the rear ceiling datum; its internal framing has not been laid out.

T-N · TRUSS ELEVATION

West → east · dimensions along the framing line · member layout projected directly from the current 3D model

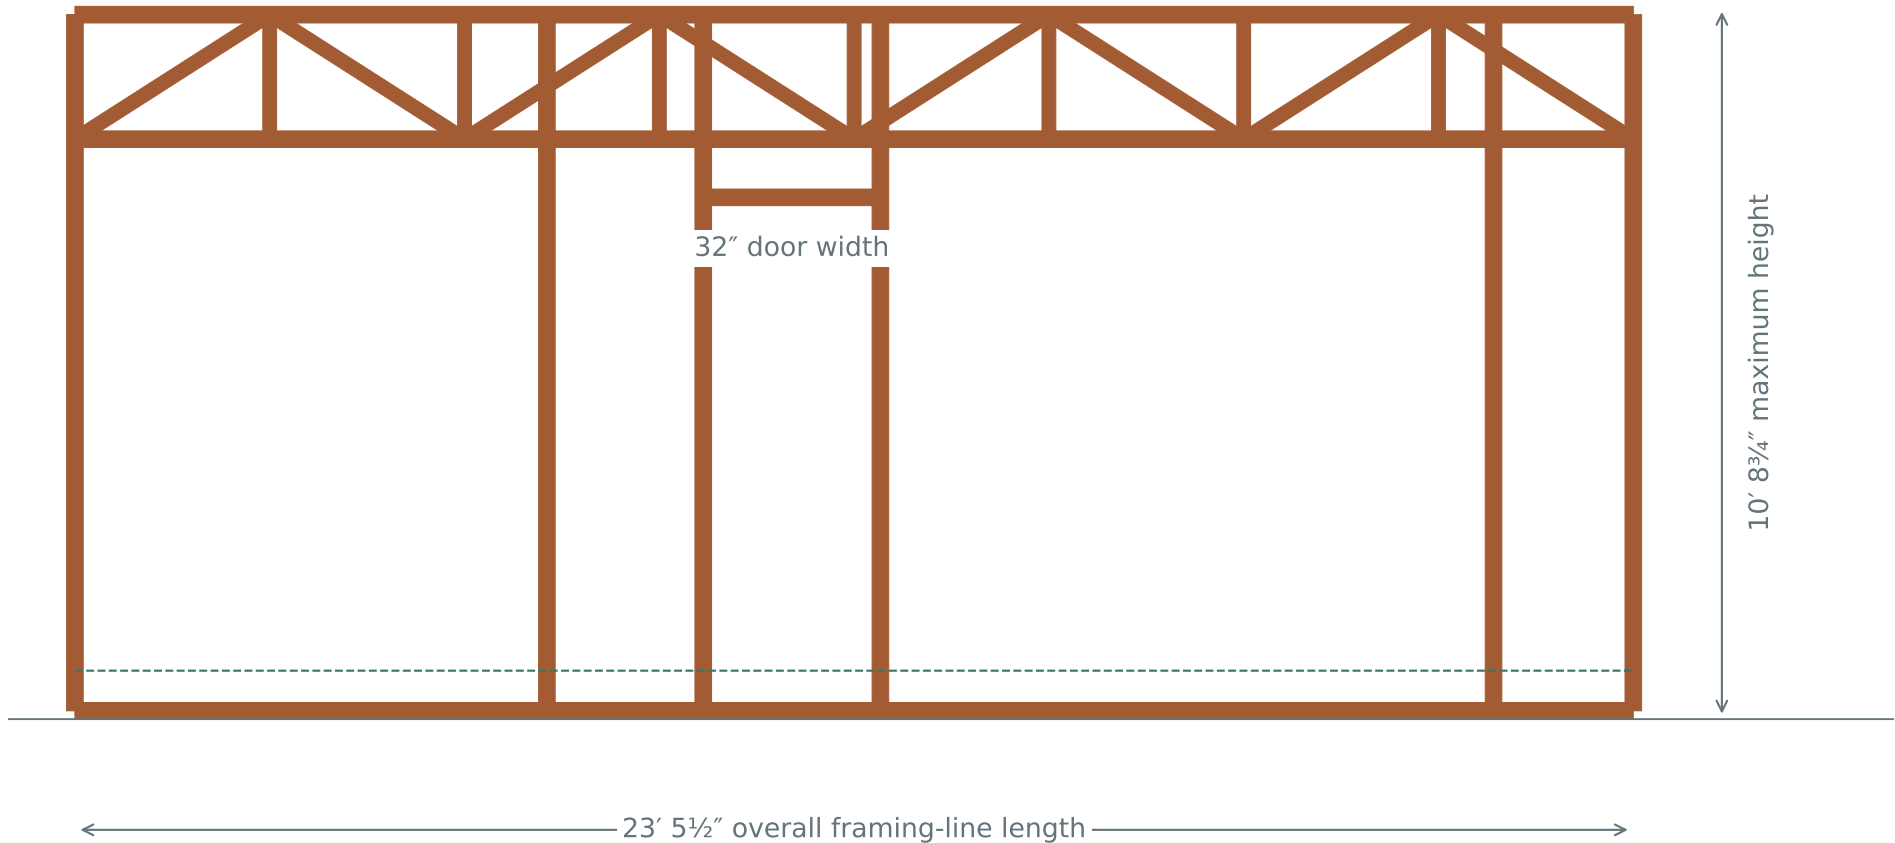

COMMON BOTTOM = 8' 2½" ABOVE GROUND · COLUMN-SUPPORTED

UPRIGHT STATIONS X (in): -32, 53.25, 81.5, 113.5, 224.25, 249.5.
HEADER: nominal 24" deep; eight equal bays of 35 3/16 in. Door: 32" wide × 84" high above loft floor.
DOOR center X = 97½"; opening edges X = 81½" / 113½". Floor is 8¾" above common truss bottom.
North wall windows and side webs require coordination. Overall truss includes west walkway width; it is not loft-floor width.

Concept geometry, not fabrication drawings. Member sizes, joints, bracing and bearing details require design.
The shallow hip roof cap sits above the rear ceiling datum; its internal framing has not been laid out.