

CLOSED JOIST CEILING · NO RAISED SERVICE FLOOR

ordinary hangers + hidden wiring in the 2×8 cavities + east lean-to distribution spine

JH-002

21 SEPTEMBER 2026


BEST VALUE

direct ceiling under joists; keep the W-beams exposed; feed every bay separately from the hidden east chase

NOT FOR CONSTRUCTION


A DIRECT CEILING BELOW THE 2×8s

No raised floor. The joist cavity becomes the service space; the W-beam remains expressed below it.

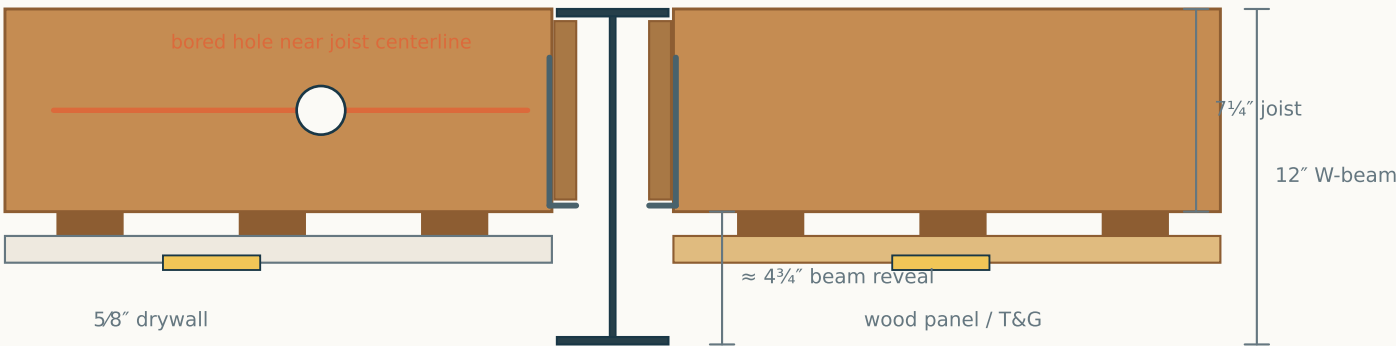

A thin furring layer clears hanger seats, gives the finish a continuous fastening plane, and reduces drywall cracking at hardware.


C 2×8 BORING ZONE — SIMPLE, BUT DISCIPLINED

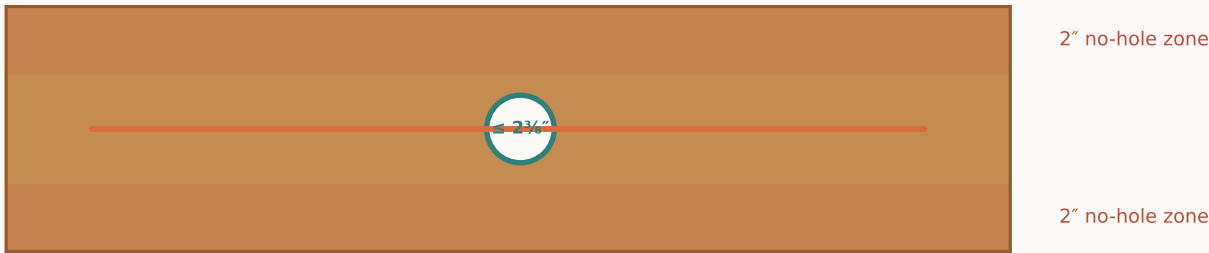

For a 7¼" sawn joist: hole diameter ≤ one-third depth (2.42"), ≥ 2" from top, bottom, other holes and any notch.

B EAST LEAN-TO AS THE ELECTRICAL SPINE

Feed each beam bay independently from the hidden east zone; never ask a cable to cross a W-web,

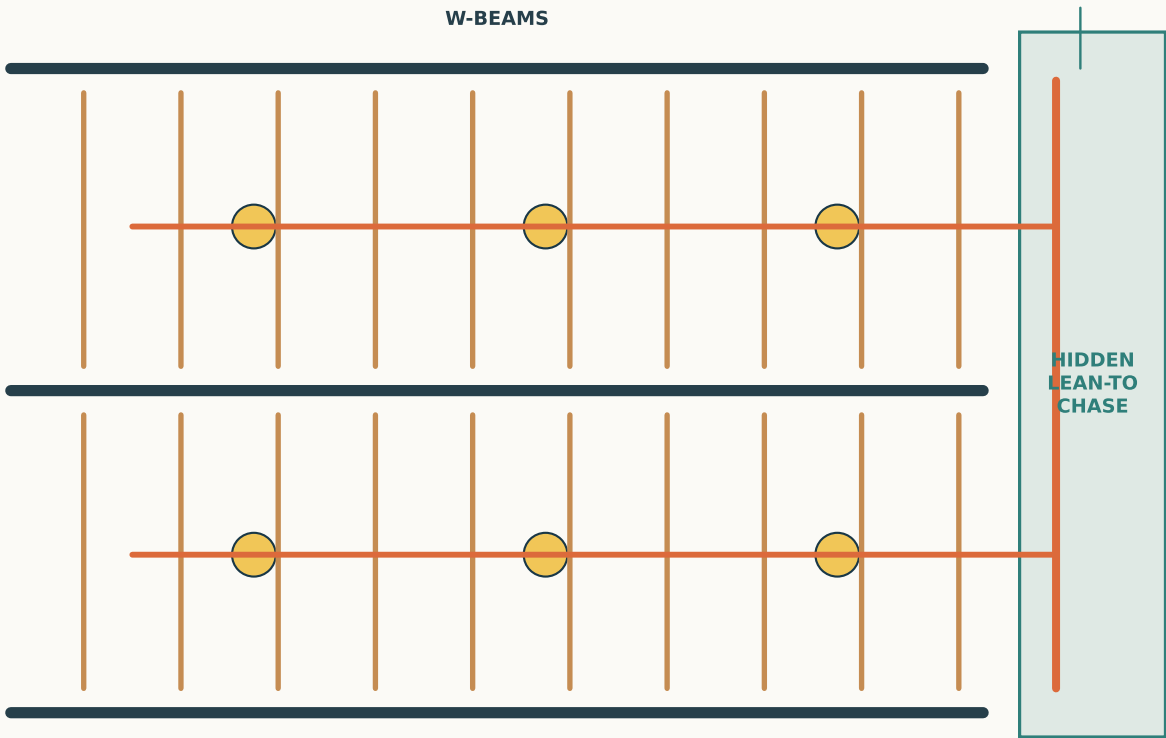

lights and cable remain inside one bay

D WHAT THE ROOM WILL FEEL LIKE

DRYWALL

quietest + brightest

best fire/acoustic finish

VENEER PLYWOOD

warm modern grid

expressed 1/8" reveals

T&G WOOD

richest / most crafted

more joints and movement