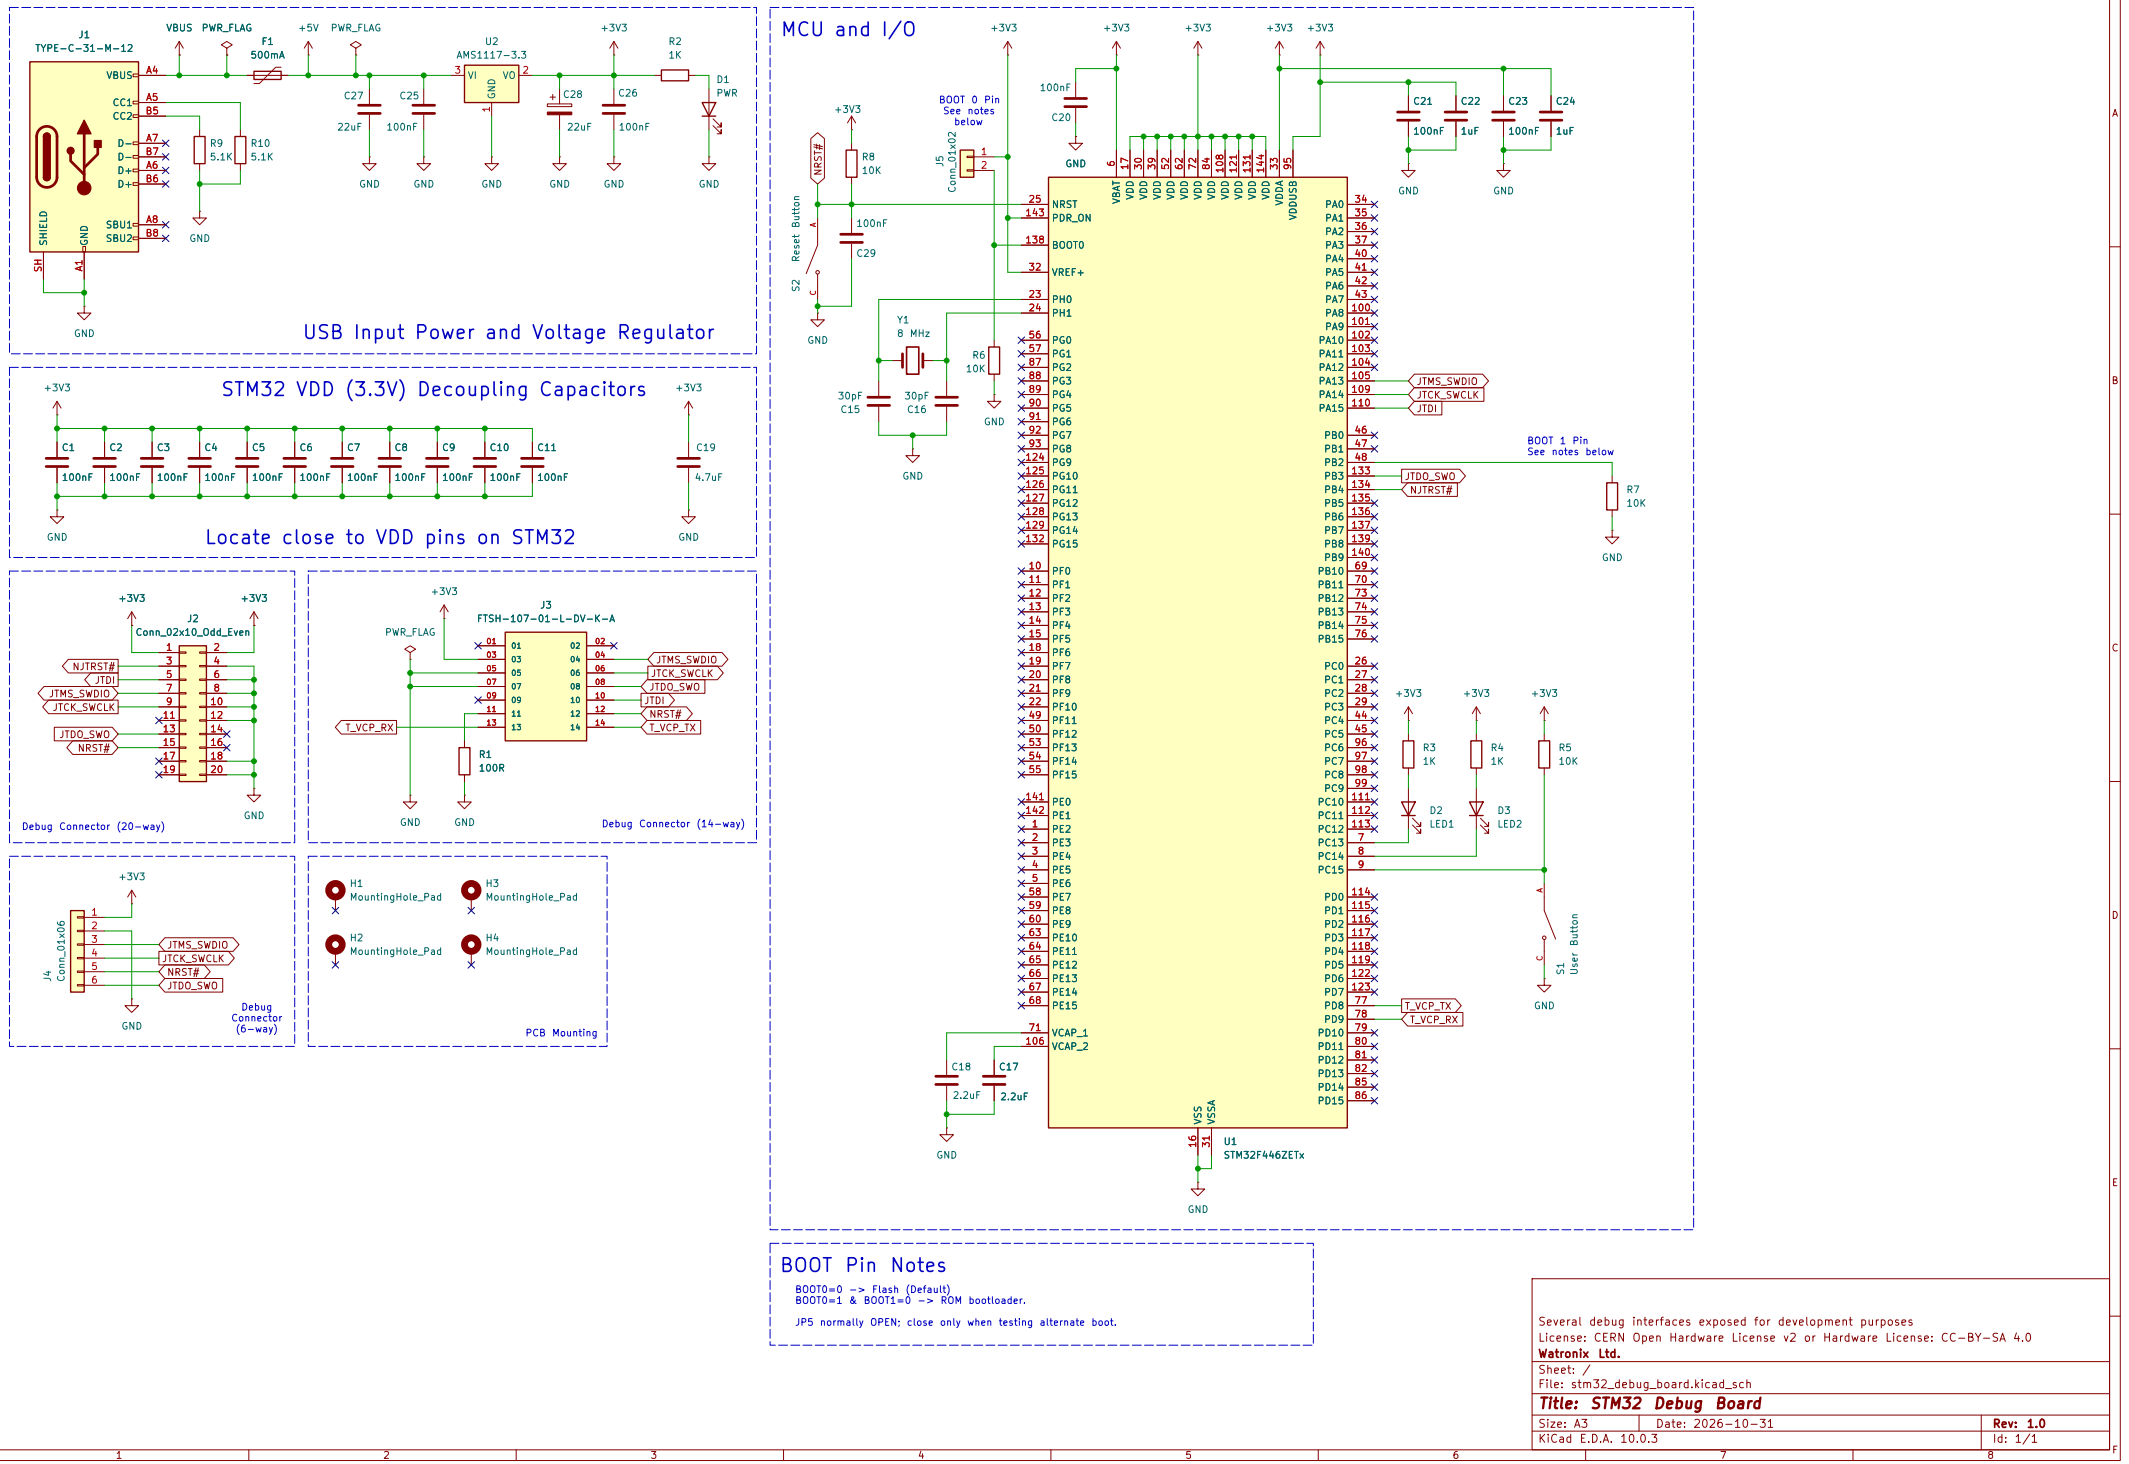

USB Input Power and Voltage Regulator
STM32 VDD (3.3V) Decoupling Capacitors
Locate close to VDD pins on STM32
MCU and I/O
Debug Connector (20-way)
Debug Connector (14-way)
Debug Connector (6-way)
PCB Mounting
BOOT Pin Notes
BOOT0=0 -> Flash (Default)
BOOT0=1 & BOOT1=0 -> ROM bootloader.
JP5 normally OPEN; close only when testing alternate boot.
Several debug interfaces exposed for development purposes
License: CERN Open Hardware License v2 or Hardware License: CC-BY-SA 4.0
Watronix Ltd.
Sheet: /
File: stm32_debug_board.kicad_sch
Title: STM32 Debug Board
Size: A3
Date: 2026-10-31
Rev: 1.0
KiCad E.D.A. 10.0.3
Id: 1/1