





1 Overview

Features

- High efficient multi voltage power supply chip
- Serial step up and step down pre regulator for wide input voltage range from 3.0 to 40 V with full performance and low over all power loss
- Low drop post regulator 5.0V/200mA for communication supply (named LDO_Com)
- Low drop post regulator 5.0 V/600 mA (TLF35584xxVS1) or 3.3 V/600 mA (TLF35584xxVS2) for μ C supply (named LDO_ μ C)
- Provides enable, sync out signal and voltage monitoring (inside device to be added to reset function) for an optional external post regulator for core supply
- Voltage reference 5.0 V +/- 1% for ADC supply, 150 mA current capability (named Volt_Ref)
- Two trackers for sensor supply following voltage reference 150 mA current capability each (named Tracker 1 and Tracker 2)
- Standby regulator 5.0 V/10 mA (TLF35584xxVS1) or 3.3 V/10 mA (TLF35584xxVS2) (named LDO_Stby)
- Independent voltage monitoring block with reset function
- Configurable functional and window watchdog
- 16-bit SPI
- Safe state control with two safe state signals with programmable delay
- Input voltage monitoring (over voltage switch off)
- Green Product (RoHS compliant)
- ISO26262 compliant
- AEC Qualified

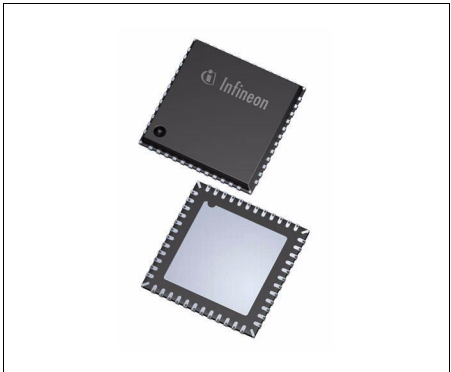

PG-VQFN-48

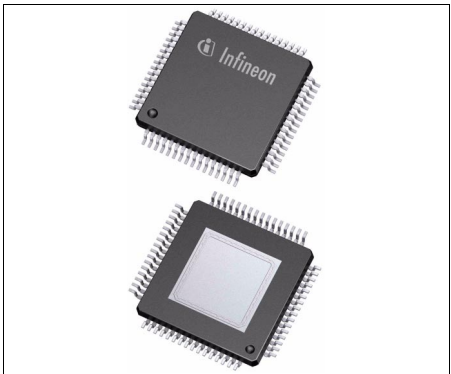

PG-LQFP-64

Type	Package	Marking (Line1 / Line2)
TLF35584QVVS1 (5.0 V Variant)	PG-VQFN-48	35584 / VS1
TLF35584QVVS2 (3.3 V Variant)	PG-VQFN-48	35584 / VS2
TLF35584QKVS1 (5.0 V Variant)	PG-LQFP-64	TLF35584 / QK VS1