
Block: MAIN
Author:
Created: 12.10.2026 02:52:42 pm
Last Modified: 13.10.2026 09:39:23 am


Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		


Network 1 PROGRAM: SOLID LIGHT FROM RIGHT TO LEFT BUT NOT BACK

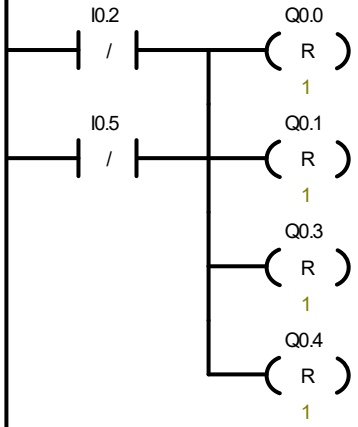



Network 2 Network Title

Network Comment




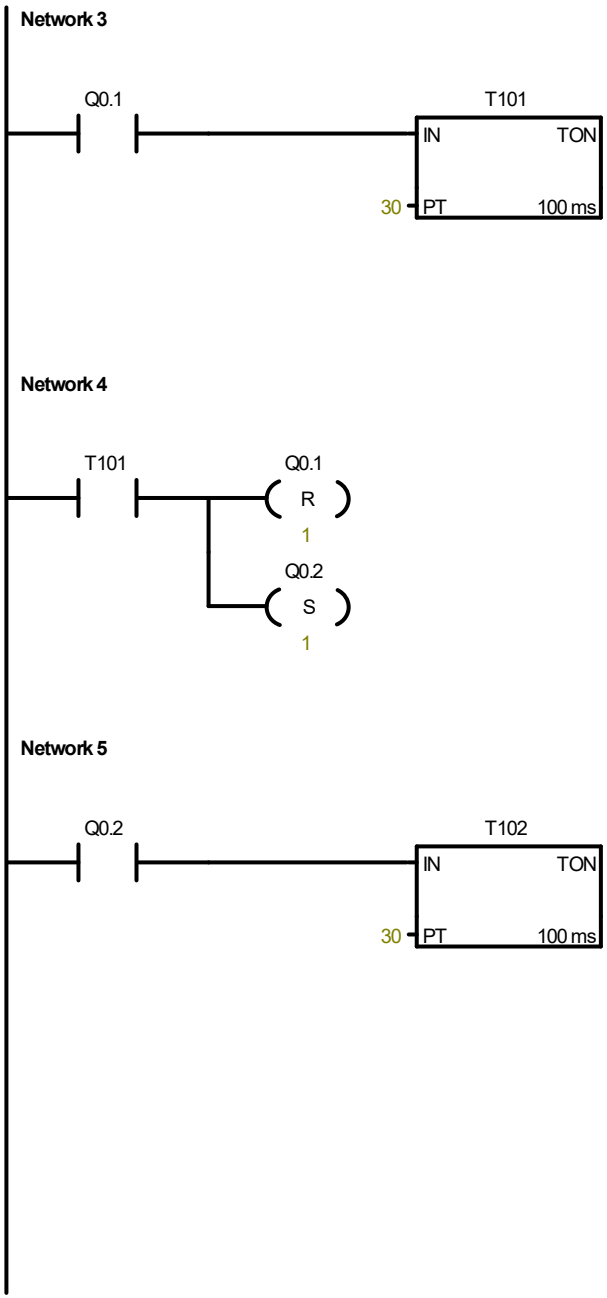
Network 3
Q0.1
T101
IN
TON
30
PT
100 ms
Network 4
T101
Q0.1
R
1
Q0.2
S
1
Network 5
Q0.2
T102
IN
TON
30
PT
100 ms

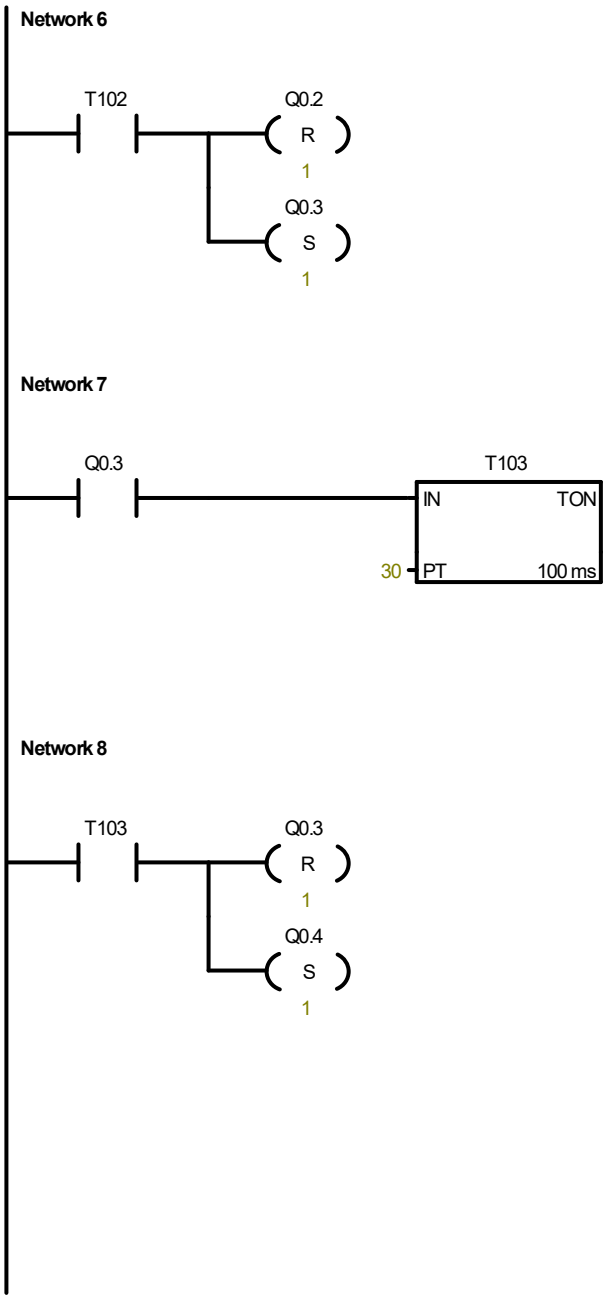
Network 6
T102
Q0.2
R
1
Q0.3
S
1
Network 7
Q0.3
T103
IN
TON
30
PT
100 ms
Network 8
T103
Q0.3
R
1
Q0.4
S
1

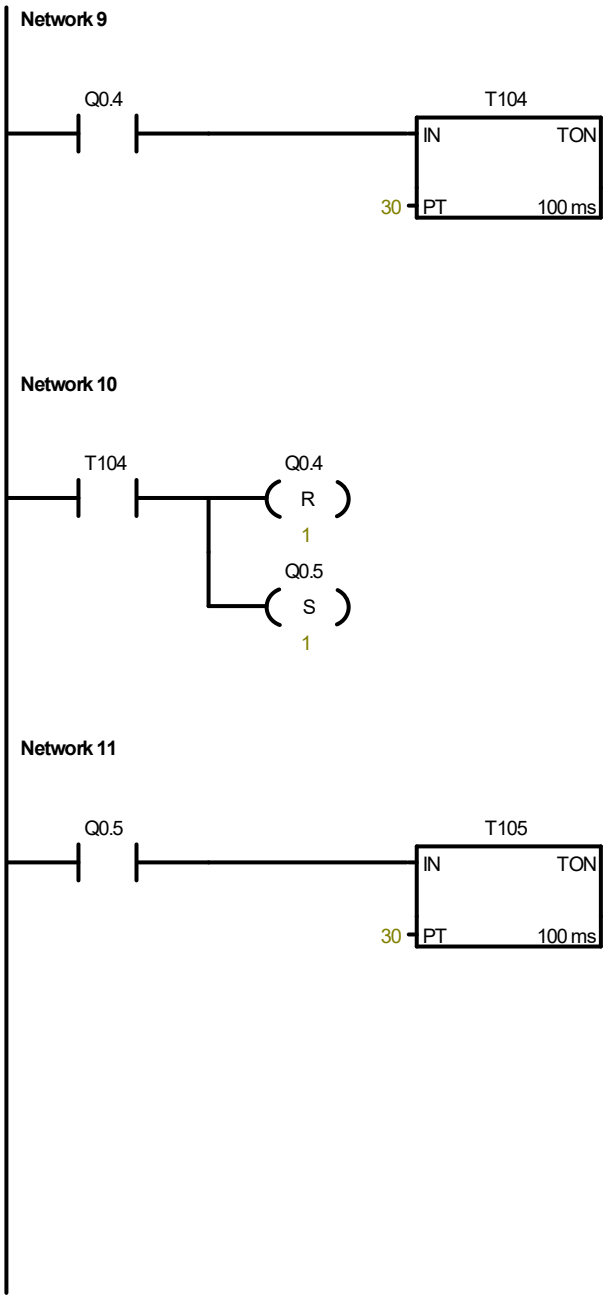
Network 9
Q0.4
T104
IN
TON
30
PT
100 ms
Network 10
T104
Q0.4
R
1
Q0.5
S
1
Network 11
Q0.5
T105
IN
TON
30
PT
100 ms

Network 12

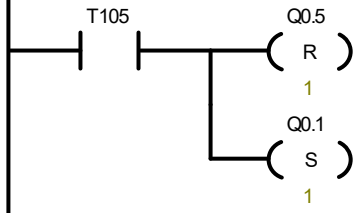


Block: SBR_0
Author:
Created: 12.10.2026 02:52:42 pm
Last Modified: 12.10.2026 02:52:42 pm

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment




Block: INT_0
Author:
Created: 12.10.2026 02:52:42 pm
Last Modified: 12.10.2026 02:52:42 pm

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.