
Block: MAIN
Author:
Created: 13.10.2026 03:10:09 pm
Last Modified: 13.10.2026 03:41:02 pm

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		


Network 1 program: MAKES BLINKING ONE BULB PER TIME FROM RIGHT TO LEFT AND THEN OFF
x2 timers x6 counters

1st button causes bulb1 to blink 5 times then it goes off; enable first bulb

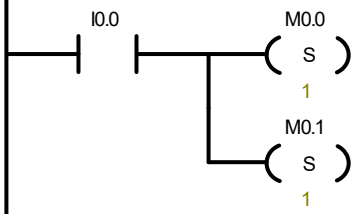


Network 2

blinking generator

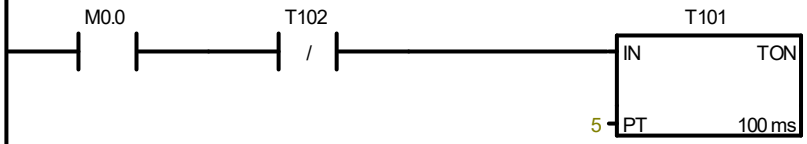


Network 3

pulse generator for blinker

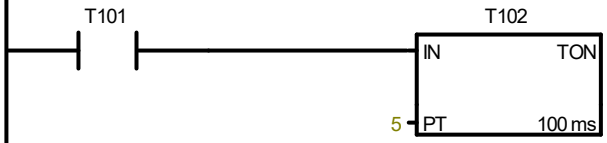


Network 4

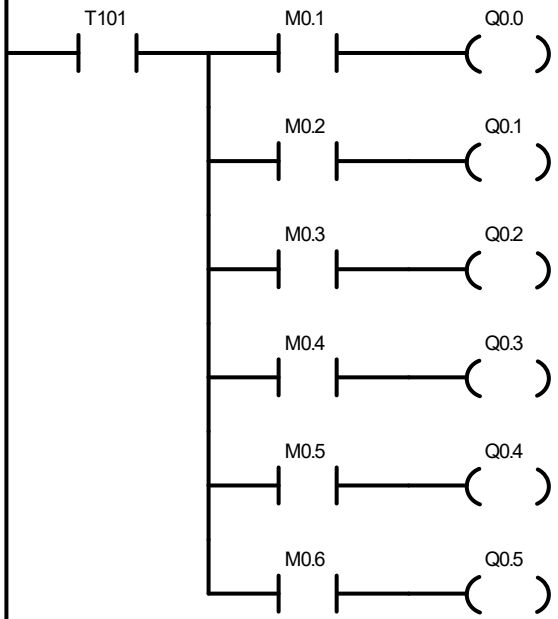


Network 5

disable bulb 1, enable bulb 2

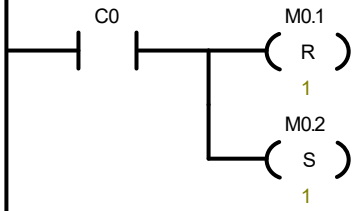


Network 6

disable bulb 1, enable bulb 2

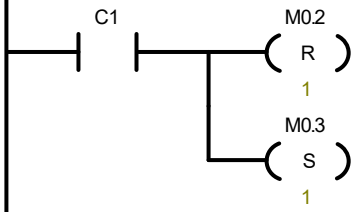


Network 7

disable bulb 1, enable bulb 2

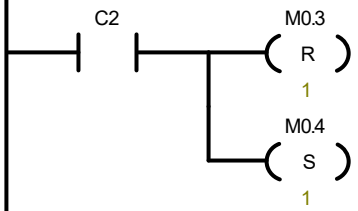


Network 8

disable bulb 1, enable bulb 2

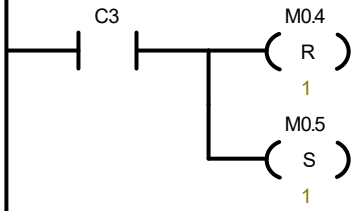


Network 9

disable bulb 1, enable bulb 2

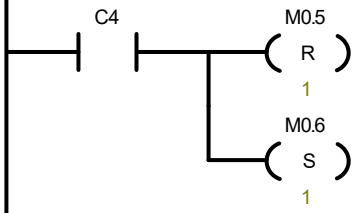


Network 10

disable bulb 1, enable bulb 2




Network 11

counter for bulb1

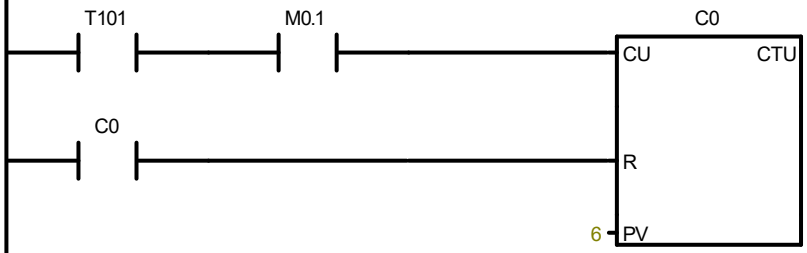


Network 12

counter for bulb2

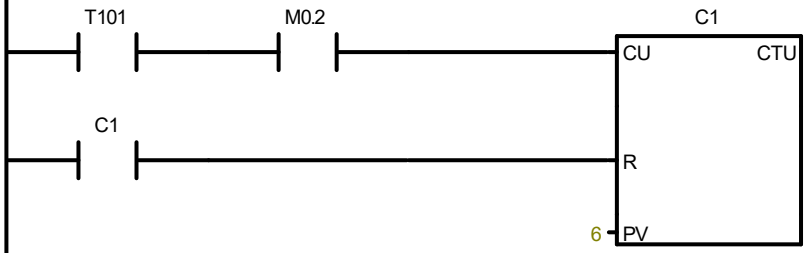


Network 13

counter for bulb2

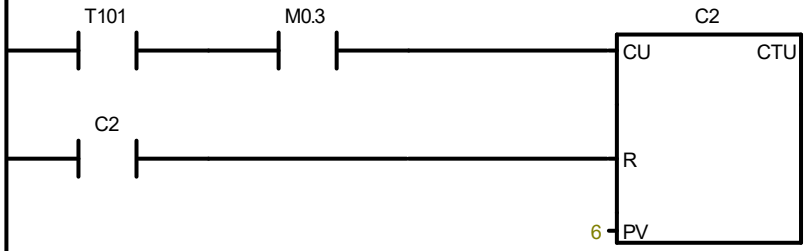


Network 14

counter for bulb2

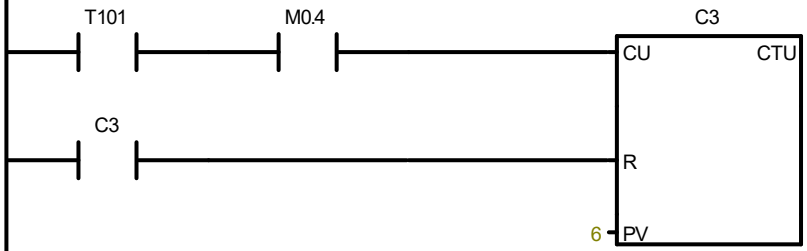


Network 15

counter for bulb2

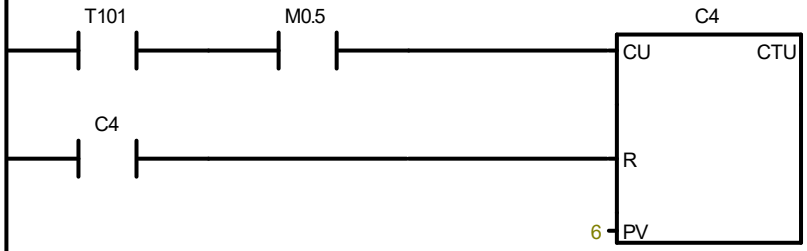

Network 16

counter for bulb2

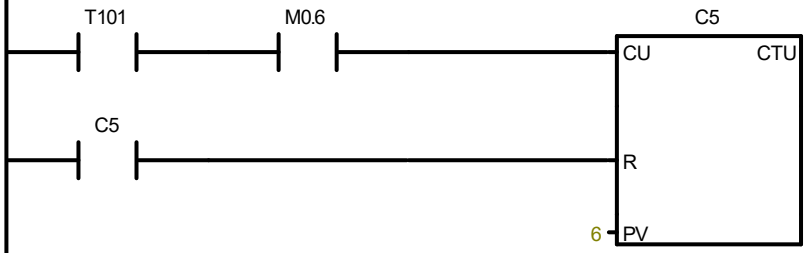


Block: SBR_0
Author:
Created: 13.10.2026 03:10:09 pm
Last Modified: 13.10.2026 03:10:09 pm

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment




Block: INT_0
Author:
Created: 13.10.2026 03:10:09 pm
Last Modified: 13.10.2026 03:10:09 pm

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.