
Block: MAIN
Author:
Created: 14.10.2026 08:59:40 am
Last Modified: 14.10.2026 11:11:00 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		


Network 1 PROGRAM: OUTPUT1 TURNS ON SOLID; NEXT WILL TURN ON BLINKING AND SO ON AND BACK FROM BULB1

turn on bulb 1 when PB1 is pressed and starts timer T101 for next change in state




Network 2

bulb 1 stays on for 5 sec

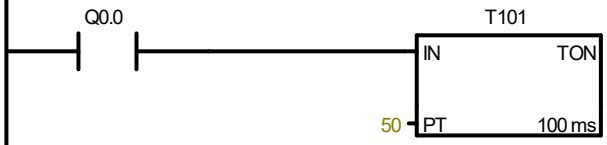


Network 3

cascade of timers; for bulb 2; turn off bulb 1; enable bulb 2 blinking

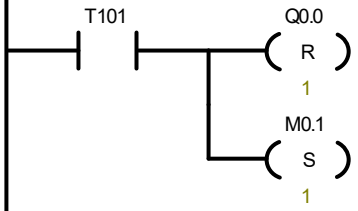


Network 4

for bulb 3; stop bulb 2 fro mblinking; enables fixed bulb 3

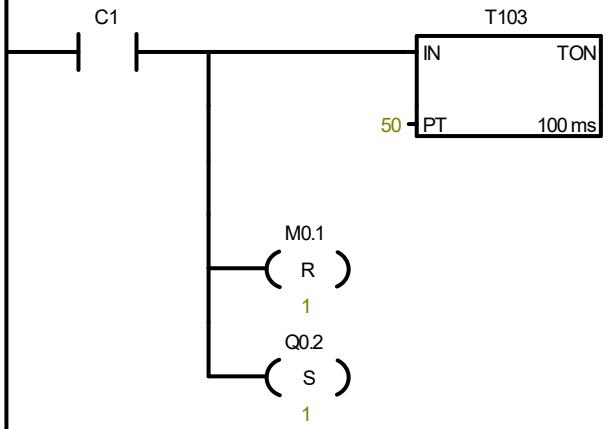


Network 5

for bulb 4; T103 +Q0.2 + M0.3 don't work alone...

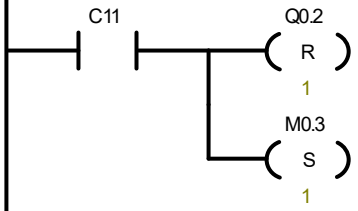


Network 6

for bulb 5

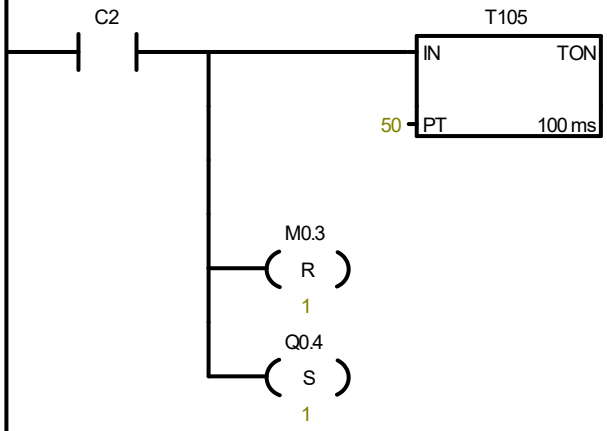


Network 7

for bulb 6; same note as above

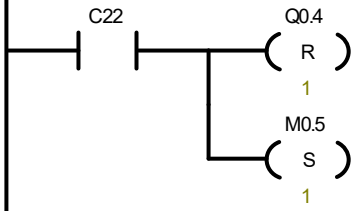


Network 8

stop bulb 6 from blinking; end of sequence

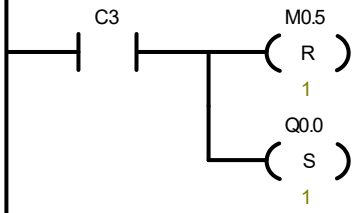


Network 9

blinking signal ton 1sec

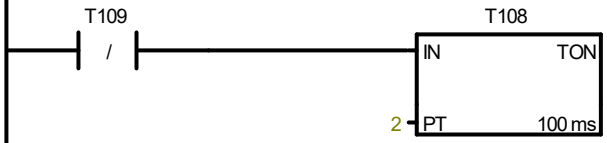


Network 10

pulse generation toff 1sec

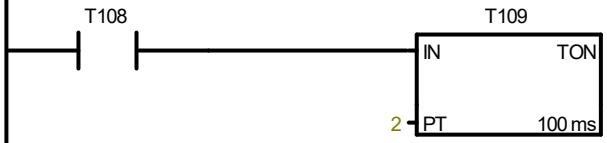


Network 11

blinking section; copy blinking signal to bulb2

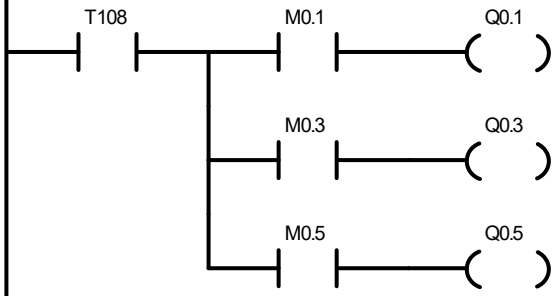


Network 12

blinking for pv-1 times. count up to 5 blinks and change state; use C1 to interrogate

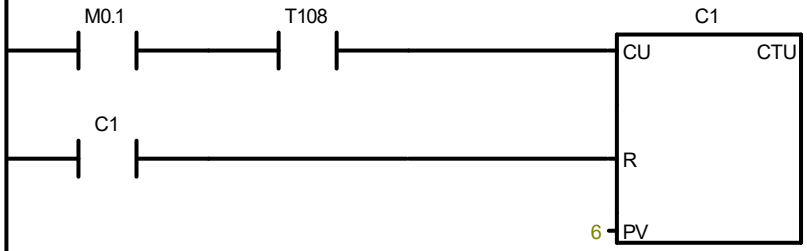


Network 13

blinking for pv-1 times. count up to 5 blinks and change state; use C1 to interrogate

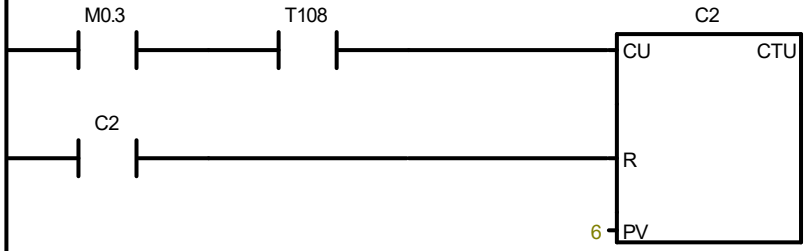


Network 14

blinking for pv-1 times. count up to 5 blinks and change state; use C1 to interrogate

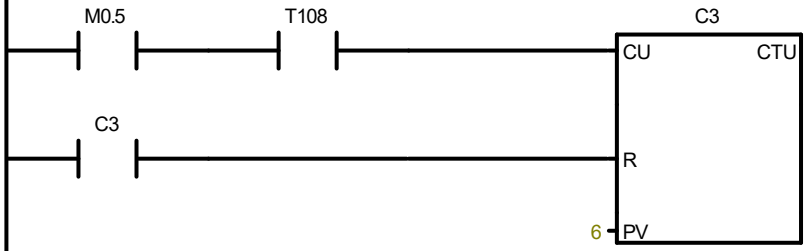


Network 15

blinking for pv-1 times. count up to 5 blinks and change state; use C1 to interrogate

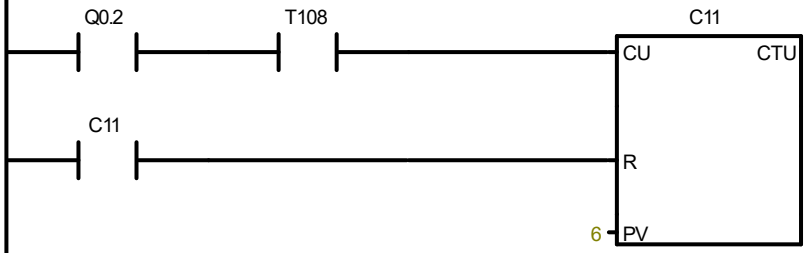


Network 16

blinking count

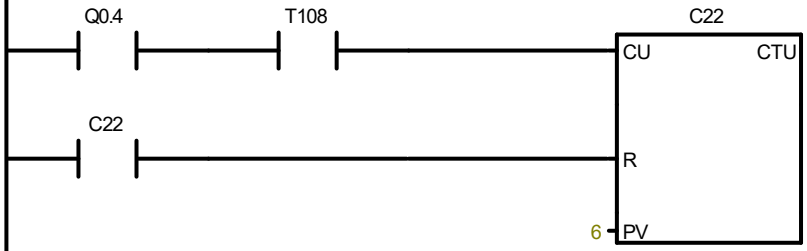

Network 17

stop buttons

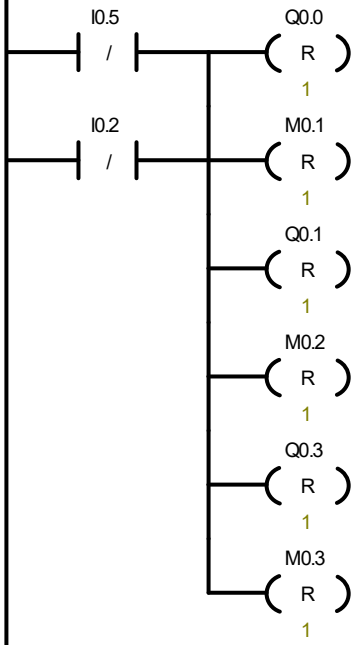


Block: SBR_0
Author:
Created: 14.10.2026 08:59:40 am
Last Modified: 14.10.2026 08:59:40 am

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment




Block: INT_0
Author:
Created: 14.10.2026 08:59:40 am
Last Modified: 14.10.2026 08:59:40 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.