
Block: MAIN
Author:
Created: 16.10.2026 09:09:47 am
Last Modified: 16.10.2026 10:15:25 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		


Network 1 project 1: this program allows to press BUTTON1 (INPUT1), turn on lights 1 3 and 5 (OUTPUT1 3 and 5) together for 5 seconds. The lights will turn off and LIGHT2 (OUTPUT2) will flash 3 times on and off at 1 second intervals.
this is for SIEMENS S7-200
candidate name: (Eric) Massimiliano Maluta

section left blank.



Network 2 turning outputs on condition


network 1: turn on light1 3 and 5 and initialise by resetting M1

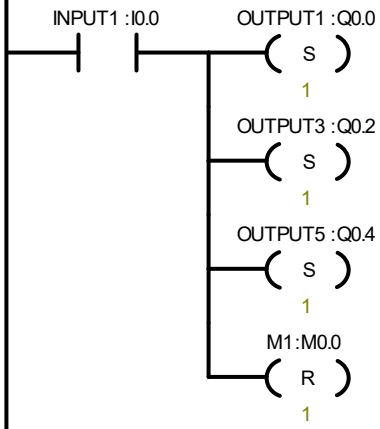

Symbol	Address	Comment
INPUT1	I0.0	n/o button
M1	M0.0	memory bit 1 for state transition
OUTPUT1	Q0.0	light bulb n.1
OUTPUT3	Q0.2	light bulb n.3
OUTPUT5	Q0.4	light bulb n.5

Network 3 timer


timer to keep output on for a preset value of 5sec

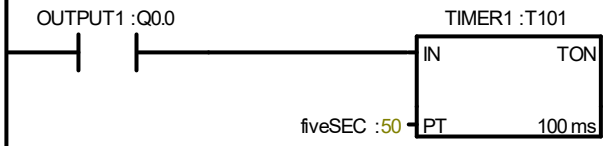

Symbol	Address	Comment
fiveSEC	50	constant value for 5 second delay
OUTPUT1	Q0.0	light bulb n.1
TIMER1	T101	timer used to count up to 5sec

Network 4 changes when the timer reaches preset values


T101 here will be true when TIMER1 reaches the preset time value

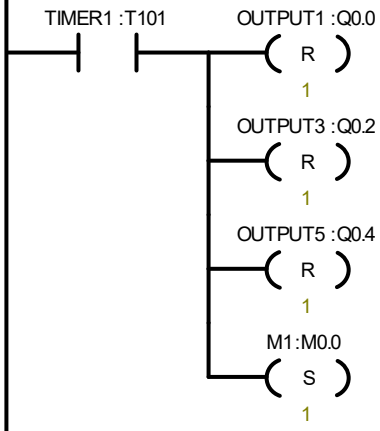

Symbol	Address	Comment
M1	M0.0	memory bit 1 for state transition
OUTPUT1	Q0.0	light bulb n.1
OUTPUT3	Q0.2	light bulb n.3
OUTPUT5	Q0.4	light bulb n.5
TIMER1	T101	timer used to count up to 5sec

Network 5 copy into output2


copy TIMER1 pulses into LIGHT2



Symbol	Address	Comment
M1	M0.0	memory bit 1 for state transition
OUTPUT2	Q0.1	light bulb n.2; output2
TIMER2	T103	generates flashing timing; on time

Network 6 TIMER2 sec1


TIMER2: netw6 and 7 form the signal for flashing.
section 1; on time period for the timer signal (default 10x100ms=1sec)

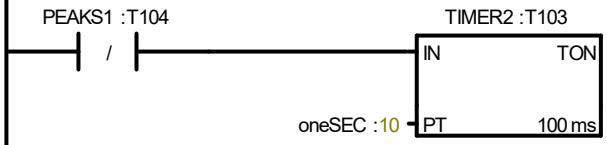

Symbol	Address	Comment
oneSEC	10	1second delay (constant)
PEAKS1	T104	TIMER1 peaks
TIMER2	T103	generates flashing timing; on time

Network 7 TIMER2 sec2


TIMER2: section 2; pulse generation; off time period for the timer signal (default 10x100ms=1sec)

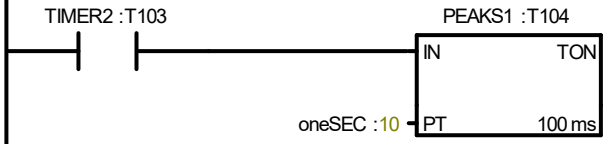

Symbol	Address	Comment
oneSEC	10	1second delay (constant)
PEAKS1	T104	TIMER1 peaks
TIMER2	T103	generates flashing timing; on time

Network 8 peaks counter


counting peaks before turning off LIGHT2 when flashing; the counter will reset once the preset value is reached; the counter increases on peaks signal derived from TIMER1.

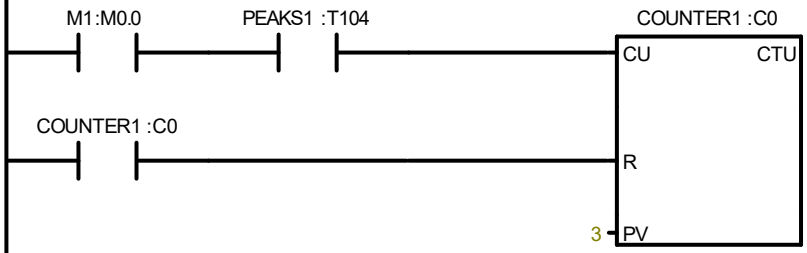

Symbol	Address	Comment
COUNTER1	C0	to count LIGHT2 flashes from tiemr signal peaks: this will be true when the cou
M1	M0.0	memory bit 1 for state transition
PEAKS1	T104	TIMER1 peaks

Network 9 end of sequence

once light2 flashes for 3 times then reset memory bit M1 and light 2 status (turn off)

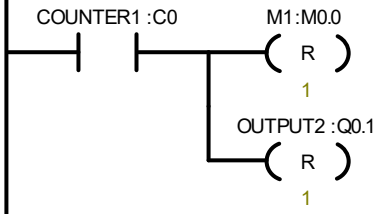


Symbol	Address	Comment
COUNTER1	C0	to count LIGHT2 flashes from tiemr signal peaks: this will be true when the cou
M1	M0.0	memory bit 1 for state transition
OUTPUT2	Q0.1	light bulb n.2; output2

Block: SBR_0
Author:
Created: 16.10.2026 09:09:47 am
Last Modified: 16.10.2026 09:09:47 am

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment



Block: INT_0
Author:
Created: 16.10.2026 09:09:47 am
Last Modified: 16.10.2026 09:09:47 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment
oneSEC	10	1second delay (constant)
fiveSEC	50	constant value for 5 second delay
TIMER2	T103	generates flashing timing; on time
PEAKS1	T104	TIMER1 peaks
COUNTER1	C0	to count LIGHT2 flashes from tiemr signal peaks: this will be true when the cou
OUTPUT2	Q0.1	light bulb n.2; output2
TIMER1	T101	timer used to count up to 5sec
M1	M0.0	memory bit 1 for state transition
OUTPUT5	Q0.4	light bulb n.5
INPUT1	I0.0	n/o button
OUTPUT1	Q0.0	light bulb n.1
OUTPUT3	Q0.2	light bulb n.3

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.