
Block: MAIN
Author:
Created: 12.10.2026 10:22:04 am
Last Modified: 12.10.2026 01:37:37 pm

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 set network 1-3


this allows to turn on lamps 1 to 3 on when pb1 is pressed

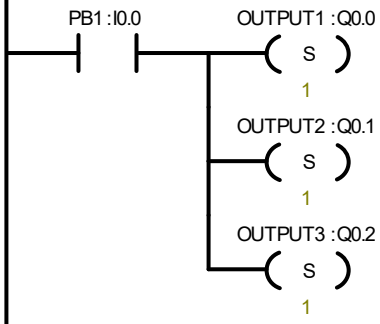

Symbol	Address	Comment
OUTPUT1	Q0.0	first green light
OUTPUT2	Q0.1	second amber light
OUTPUT3	Q0.2	third red light
PB1	I0.0	first green PB set

Network 2 reset network 1-3


this allows to turn off lamps 1-3 once pb3 is pressed

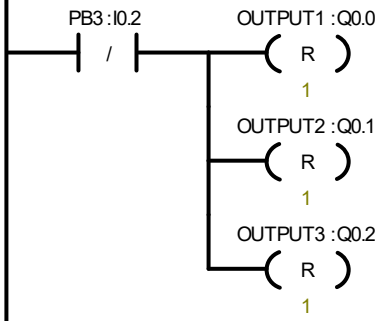

Symbol	Address	Comment
OUTPUT1	Q0.0	first green light
OUTPUT2	Q0.1	second amber light
OUTPUT3	Q0.2	third red light
PB3	I0.2	third red PB reset

Network 3 set network 4-6


this allows to turn on lamps 4-6 once pb4 is pressed

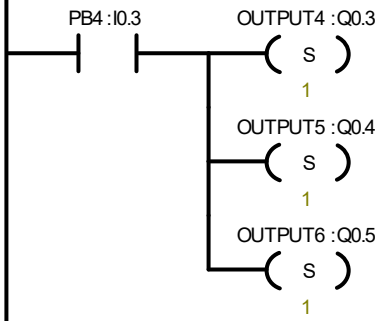

Symbol	Address	Comment
OUTPUT4	Q0.3	fourth green light
OUTPUT5	Q0.4	amber light
OUTPUT6	Q0.5	red light
PB4	I0.3	green push button set

Network 4 reset network 4-6

this allows to turn off lamps 4-6 once pb6 is pressed

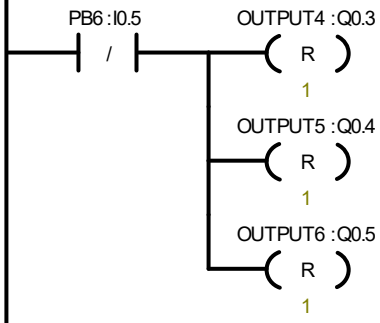


Symbol	Address	Comment
OUTPUT4	Q0.3	fourth green light
OUTPUT5	Q0.4	amber light
OUTPUT6	Q0.5	red light
PB6	I0.5	red push button reset

Block: SBR_0
Author:
Created: 12.10.2026 10:22:04 am
Last Modified: 12.10.2026 10:22:41 am

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment




Block: INT_0
Author:
Created: 12.10.2026 10:22:04 am
Last Modified: 12.10.2026 10:22:41 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment
PB6	I0.5	red push button reset
OUTPUT6	Q0.5	red light
OUTPUT5	Q0.4	amber light
OUTPUT4	Q0.3	fourth green light
PB4	I0.3	green push button set
PB3	I0.2	third red PB reset
OUTPUT3	Q0.2	third red light
OUTPUT2	Q0.1	second amber light
OUTPUT1	Q0.0	first green light
PB1	I0.0	first green PB set

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.