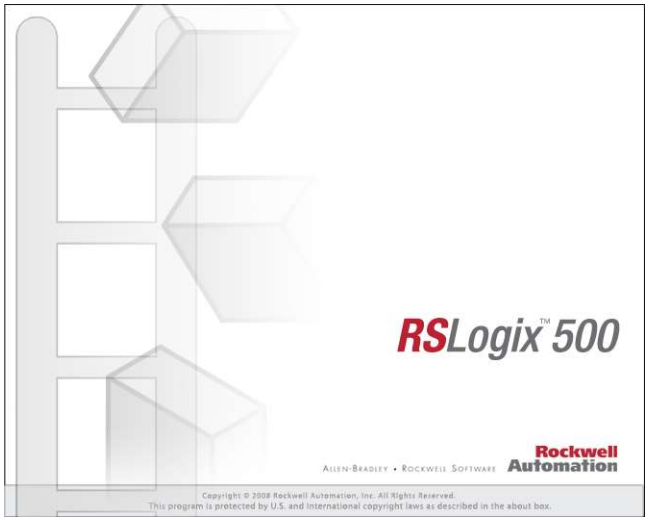
RSLogix 500 Project Report



Processor Information

Processor Type: Bul.1762 MicroLogix 1200 Series C (1 or 2 Comm Ports)

Processor Name: UNTITLED

Total Memory Used: 233 Instruction Words Used - 85 Data Table Words Used

Total Memory Left: 5463 Instruction Words Left

Program Files: 3

Data Files: 9

Program ID: f157

I/O Configuration

0	Bul.1762	MicroLogix 1200 Series C (1 or 2 C
1		
2		
3		
4		
5		
6		

Channel Configuration

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

   Source ID: 1 (decimal)
   Baud: 19200
   Parity: NONE
   Control Line : No Handshaking
   Error Detection: CRC
   Embedded Responses: Auto Detect
   Duplicate Packet Detect: Yes
   ACK Timeout(x20 ms): 50
   NAK Retries: 3
   ENQ Retries: 3

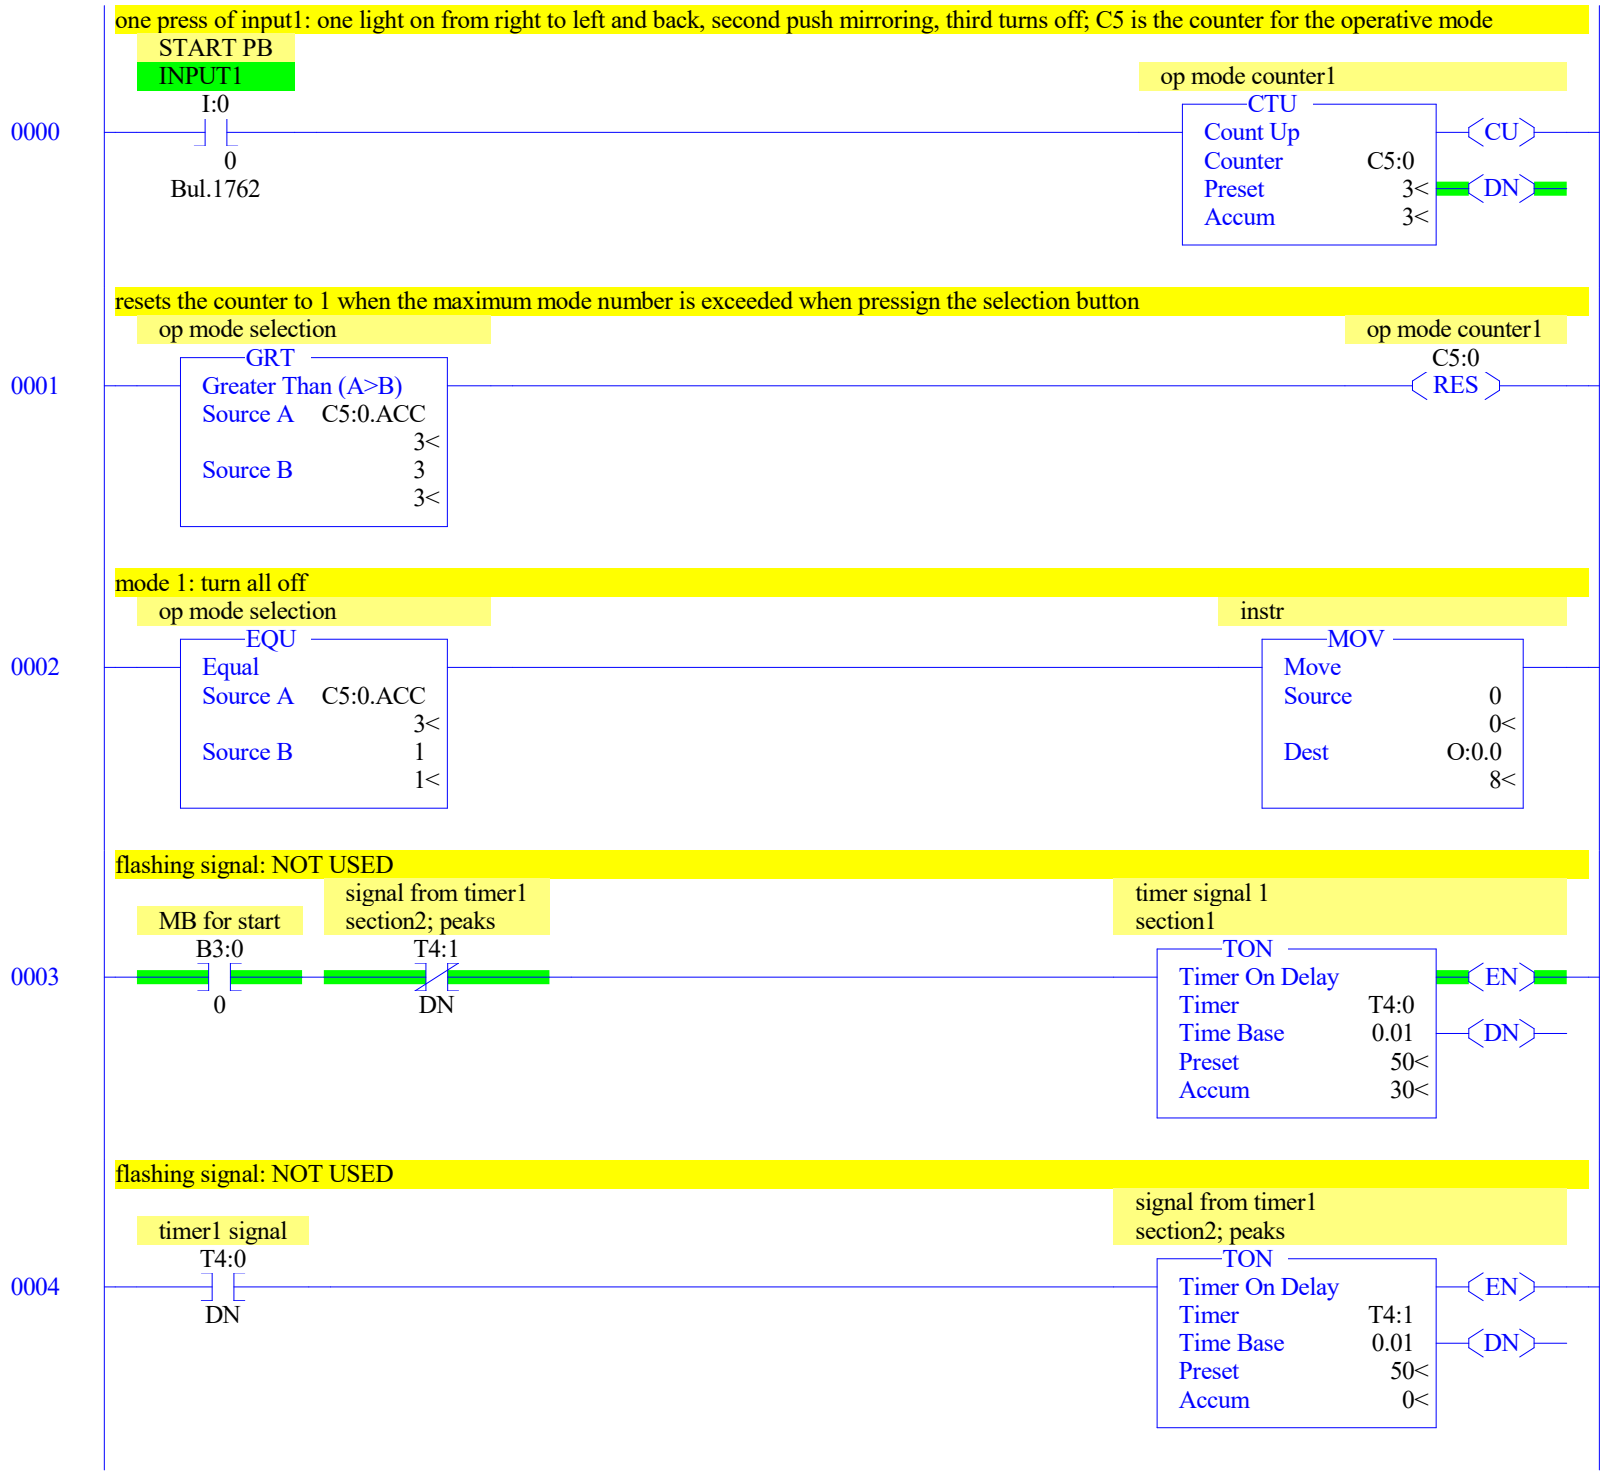
Prog/HMI Port - Driver: DF1 Full Duplex
   Source ID: 1 (decimal)
   Baud: 19200
   Parity: NONE
   Control Line : No Handshaking
   Error Detection: CRC
   Embedded Responses: Auto Detect
   Duplicate Packet Detect: Yes
   ACK Timeout(x20 ms): 50
   NAK Retries: 3
   ENQ Retries: 3

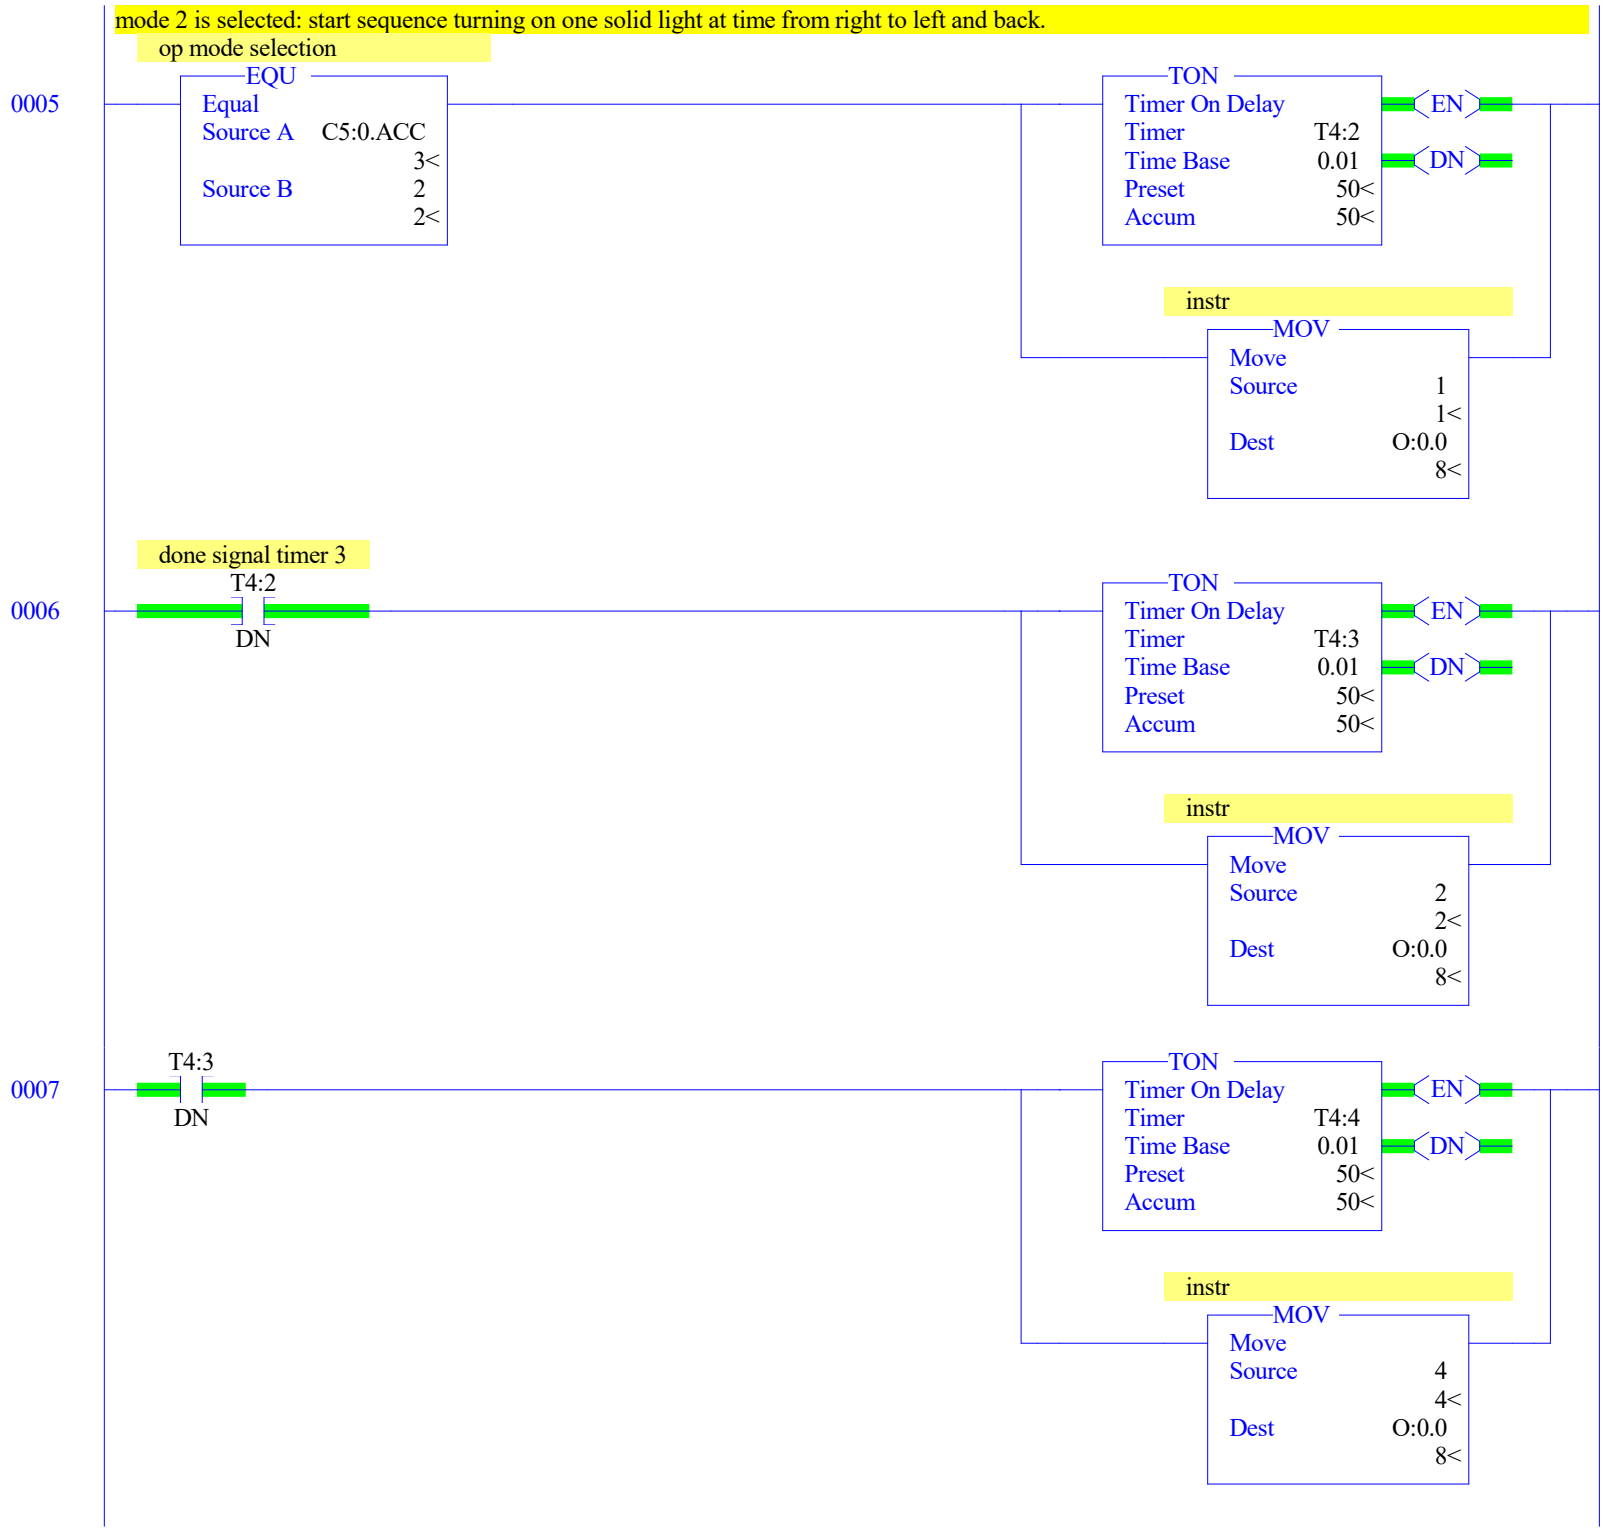
Program File List

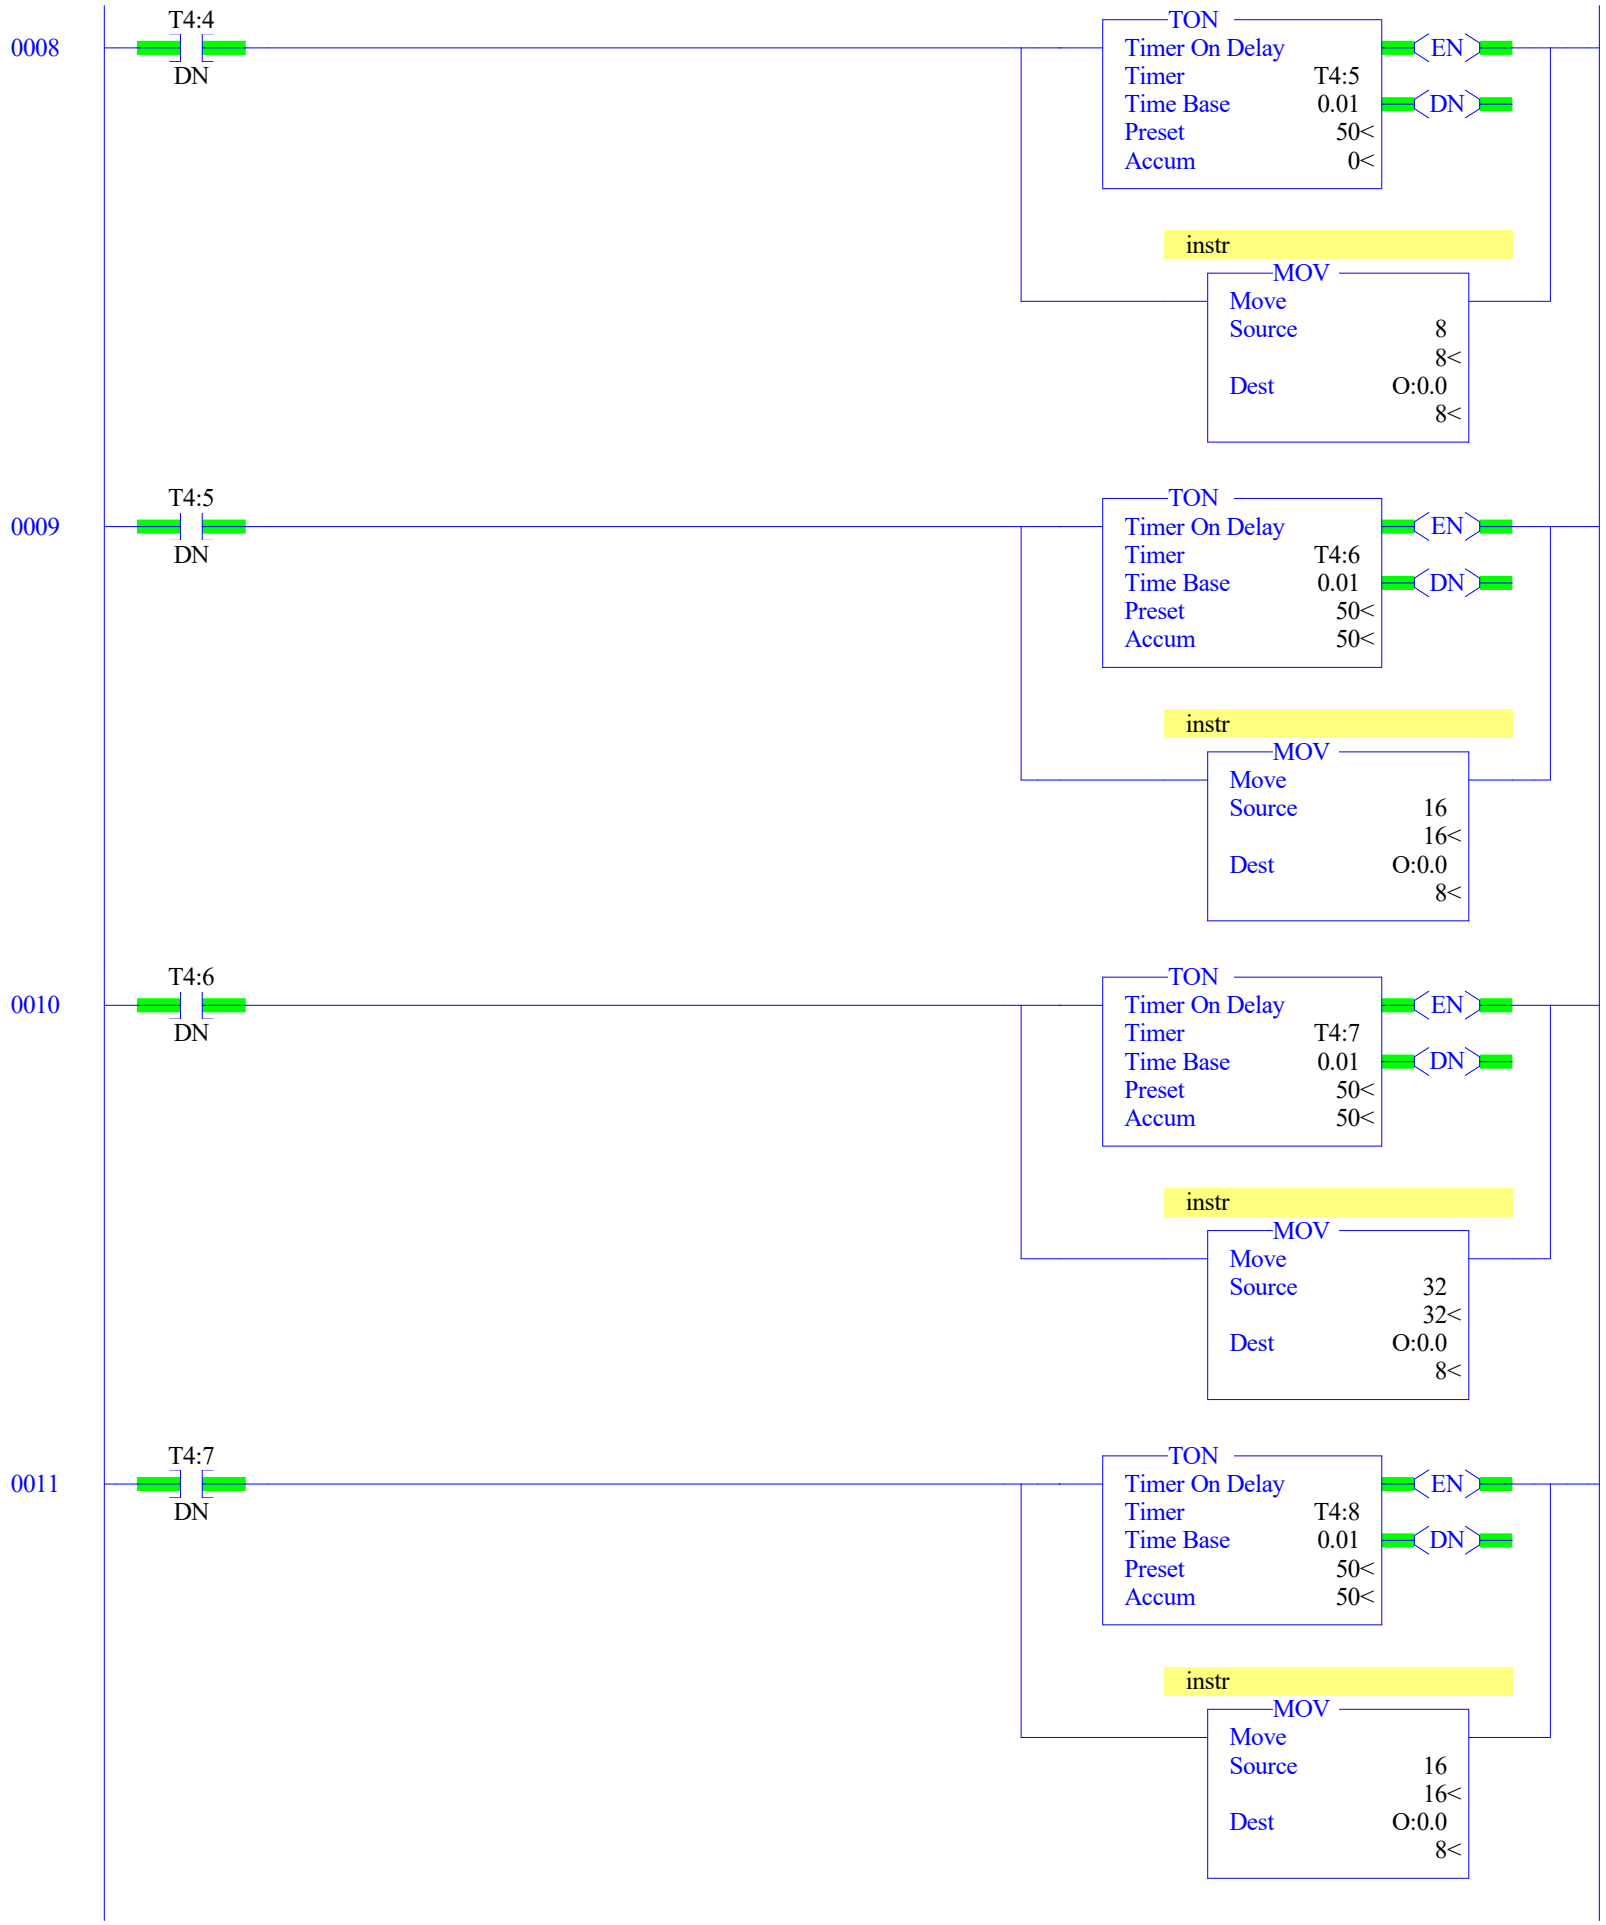
Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
	2	LADDER	22	No	674

Data File List

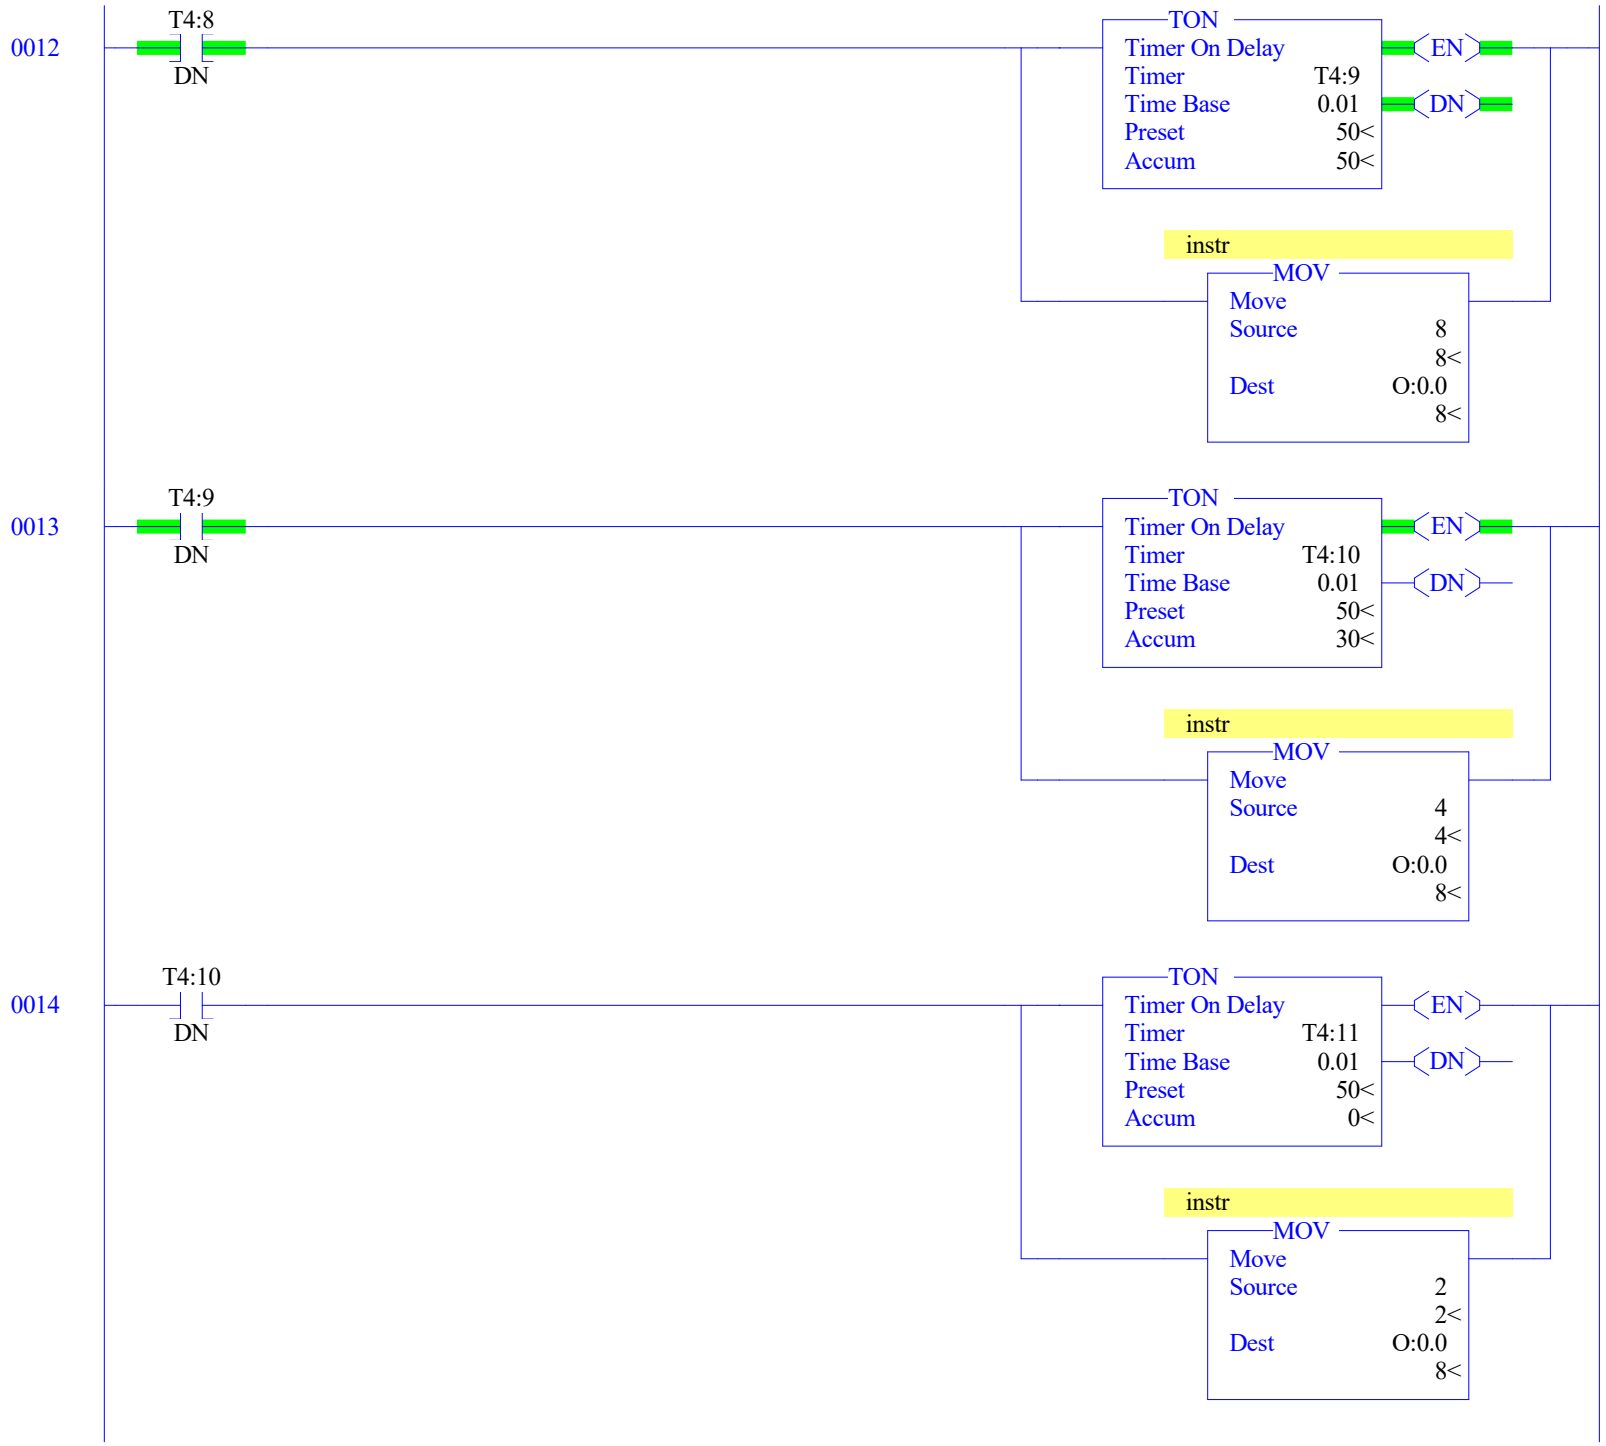
Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	12	4	O:3
INPUT	1	I	Global	No	12	4	I:3
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	1	1	B3:0
TIMER	4	T	Global	No	51	17	T4:16
COUNTER	5	C	Global	No	3	1	C5:0
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	1	1	N7:0
FLOAT	8	F	Global	No	2	1	F8:0

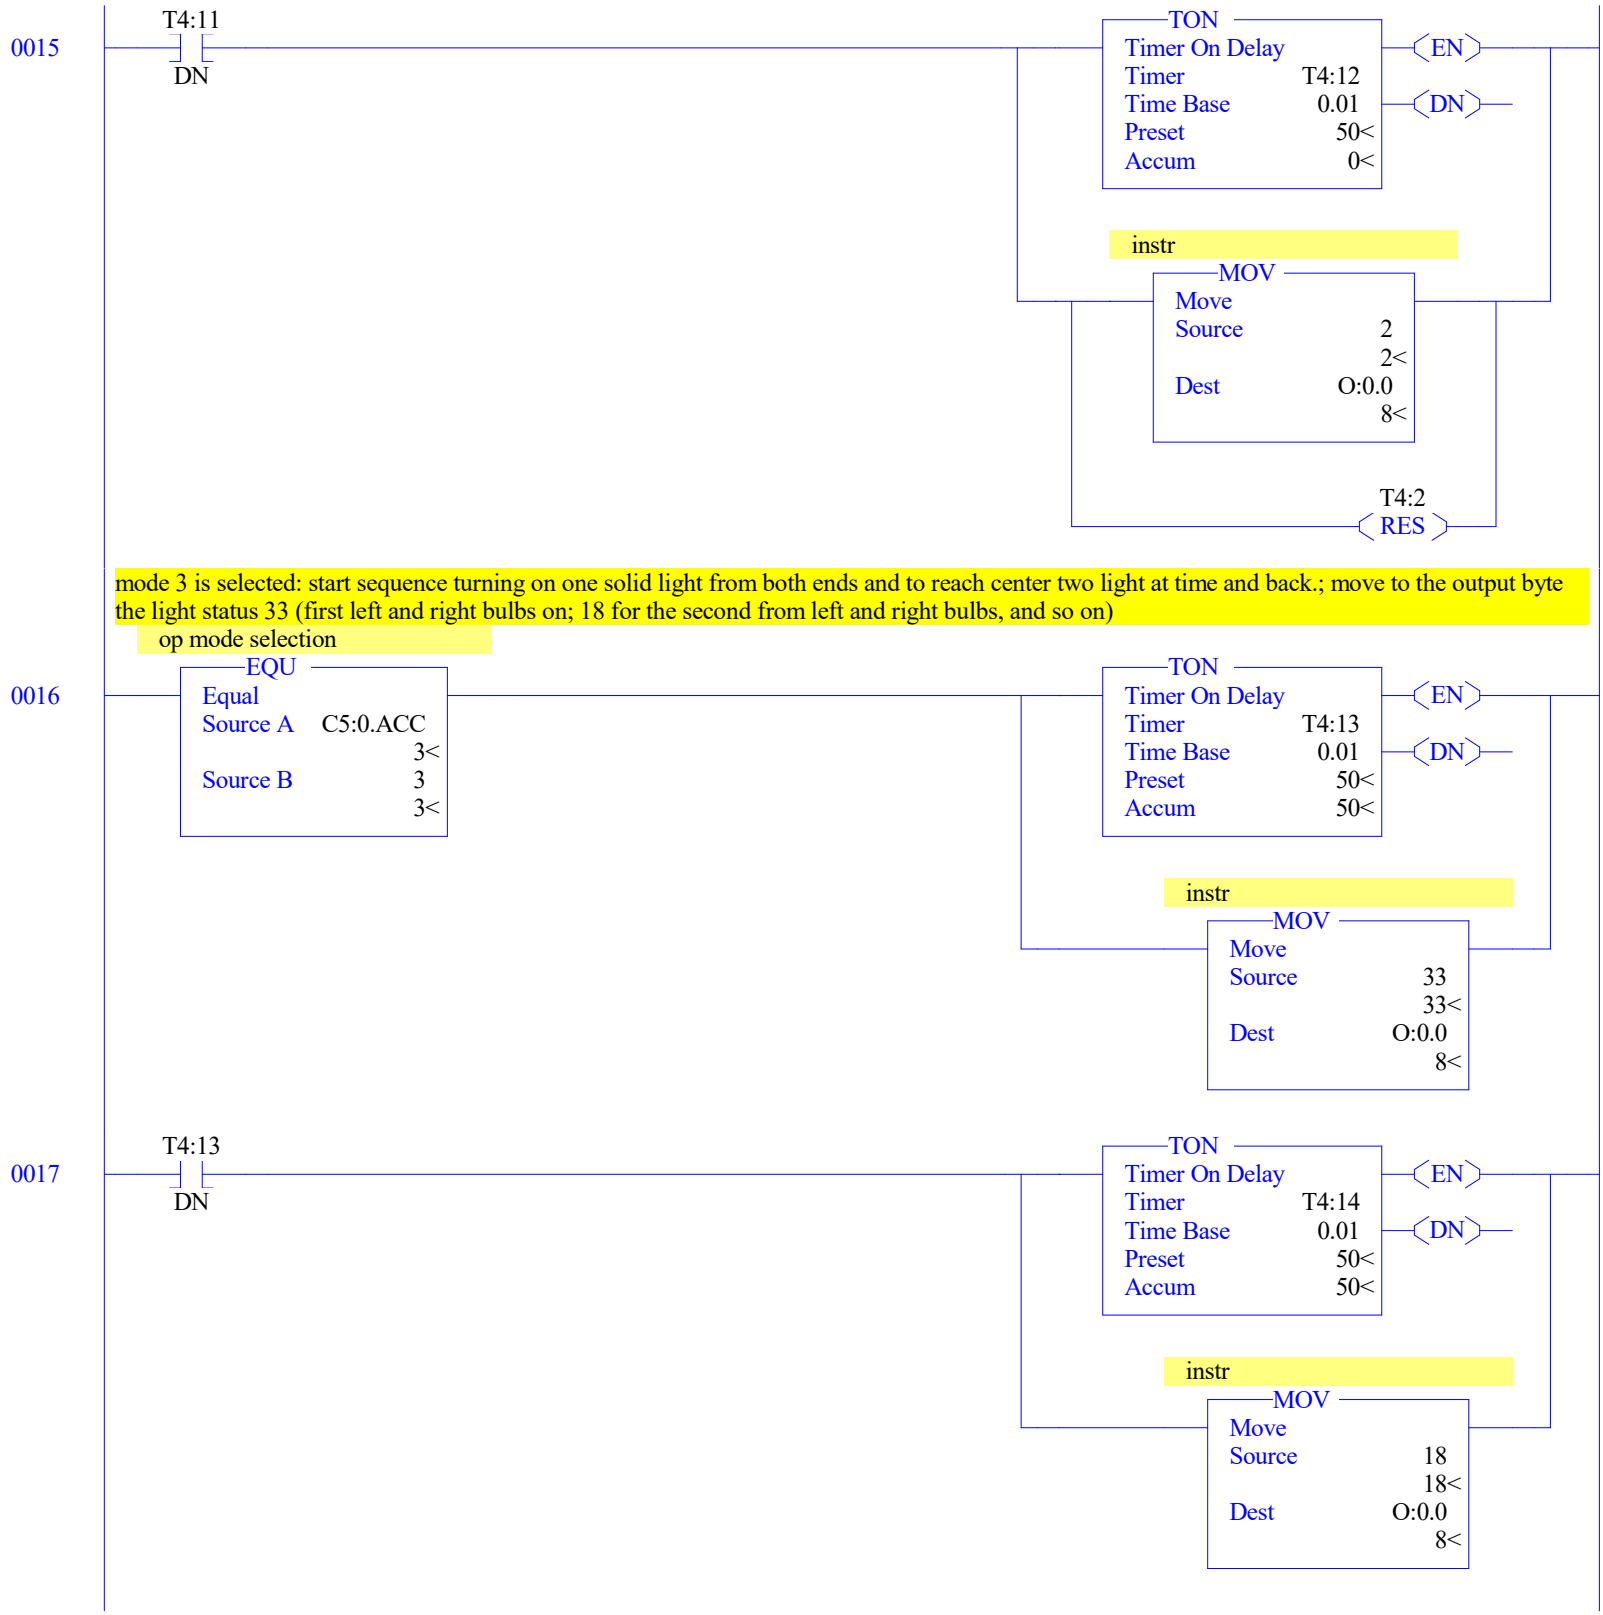

one press of input1: one light on from right to left and back, second push mirroring, third turns off; C5 is the counter for the operative mode
START PB
INPUT1
I:0
0
Bul.1762
op mode counter1
CTU
Count Up
Counter C5:0
Preset 3<
Accum 3<
CU
DN
0000
resets the counter to 1 when the maximum mode number is exceeded when pressign the selection button
op mode selection
GRT
Greater Than (A>B)
Source A C5:0.ACC
3<
Source B 3
3<
op mode counter1
C5:0
RES
0001
mode 1: turn all off
op mode selection
EQU
Equal
Source A C5:0.ACC
3<
Source B 1
1<
instr
MOV
Move
Source 0
0<
Dest O:0.0
8<
0002
flashing signal: NOT USED
MB for start
B3:0
0
signal from timer1
section2; peaks
T4:1
DN
timer signal 1
section1
TON
Timer On Delay
Timer T4:0
Time Base 0.01
Preset 50<
Accum 30<
EN
DN
0003
flashing signal: NOT USED
timer1 signal
T4:0
DN
signal from timer1
section2; peaks
TON
Timer On Delay
Timer T4:1
Time Base 0.01
Preset 50<
Accum 0<
EN
DN
0004

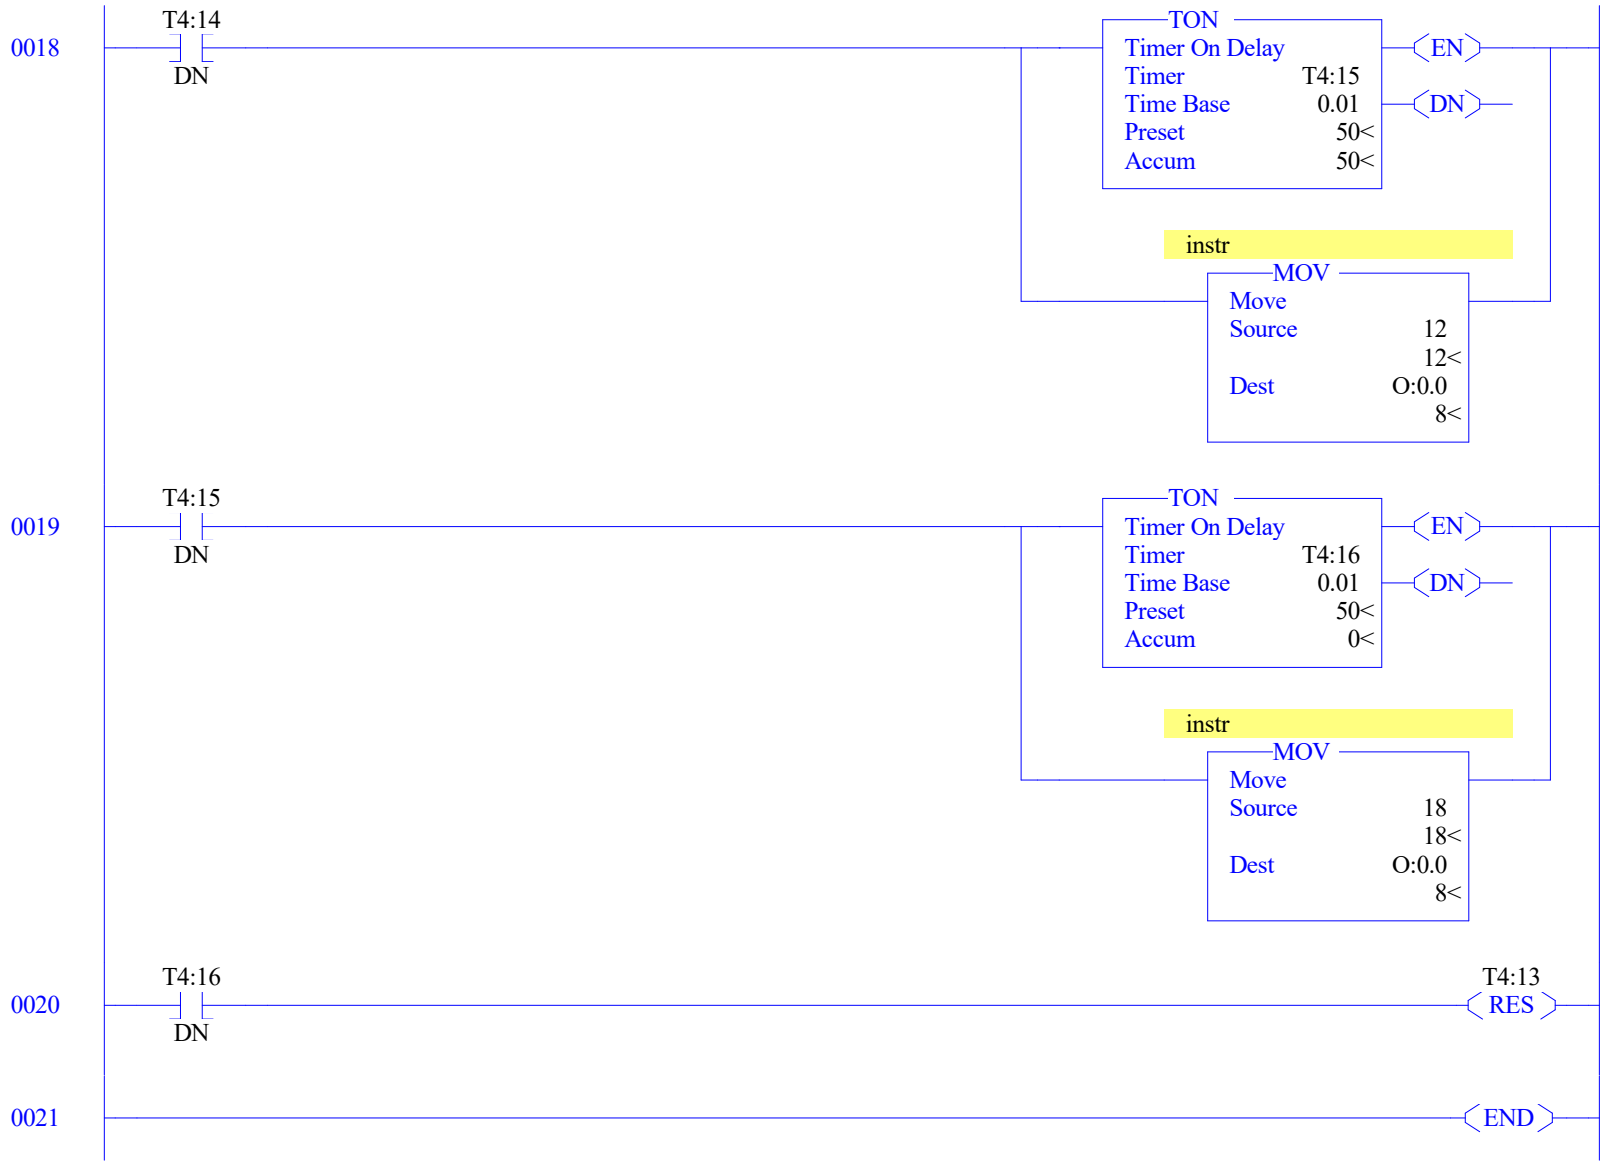

mode 2 is selected: start sequence turning on one solid light at time from right to left and back.
op mode selection
0005
EQU
Equal
Source A C5:0.ACC
3<
Source B 2
2<
TON
Timer On Delay
Timer T4:2
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 1
1<
Dest O:0.0
8<
done signal timer 3
0006
T4:2
DN
TON
Timer On Delay
Timer T4:3
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 2
2<
Dest O:0.0
8<
0007
T4:3
DN
TON
Timer On Delay
Timer T4:4
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 4
4<
Dest O:0.0
8<


0008
T4:4
DN
TON
Timer On Delay
Timer T4:5
Time Base 0.01
Preset 50<
Accum 0<
EN
DN
instr
MOV
Move
Source 8
8<
Dest O:0.0
8<
0009
T4:5
DN
TON
Timer On Delay
Timer T4:6
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 16
16<
Dest O:0.0
8<
0010
T4:6
DN
TON
Timer On Delay
Timer T4:7
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 32
32<
Dest O:0.0
8<
0011
T4:7
DN
TON
Timer On Delay
Timer T4:8
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 16
16<
Dest O:0.0
8<

LAD 2 - --- Total Rungs in File = 22




0015
T4:11
DN
TON
Timer On Delay
Timer T4:12
Time Base 0.01
Preset 50<
Accum 0<
EN
DN
instr
MOV
Move
Source 2
2<
Dest O:0.0
8<
T4:2
RES
mode 3 is selected: start sequence turning on one solid light from both ends and to reach center two light at time and back.; move to the output byte the light status 33 (first left and right bulbs on; 18 for the second from left and right bulbs, and so on)
op mode selection
0016
EQU
Equal
Source A C5:0.ACC
3<
Source B 3
3<
TON
Timer On Delay
Timer T4:13
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 33
33<
Dest O:0.0
8<
0017
T4:13
DN
TON
Timer On Delay
Timer T4:14
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 18
18<
Dest O:0.0
8<


0018
T4:14
DN
TON
Timer On Delay
Timer T4:15
Time Base 0.01
Preset 50<
Accum 50<
EN
DN
instr
MOV
Move
Source 12
12<
Dest O:0.0
8<
0019
T4:15
DN
TON
Timer On Delay
Timer T4:16
Time Base 0.01
Preset 50<
Accum 0<
EN
DN
instr
MOV
Move
Source 18
18<
Dest O:0.0
8<
0020
T4:16
DN
T4:13
RES
0021
END

Data File O0 (bin) -- OUTPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2

Data File I1 (bin) -- INPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
I:0.0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1762	MicroLogix 1200 Series C (1 or 2

Data File S2 (hex) -- STATUS

Main

Processor Mode S:1/0 - S:1/4 = Remote Run
On Power up Go To Run (Mode Behavior) S:1/12 = 0
First Pass S:1/15 = No
Free Running Clock S:4 = 0101-1101-1100-0100

Proc

OS Catalog Number S:57 = 1200
OS Series S:58 = C
OS FRS S:59 =
Processor Catalog Number S:60 =
Processor Series S:61 = A
Processor FRN S:62 =
User Program Type S:63 = 4110h
Compiler Revision Number S:64 =

Scan Times

Maximum (x10 ms) S:22 = 16
Watchdog (x10 ms) S:3 (high byte) = 10
Last 100 uSec Scan Time S:35 = 7
Scan Toggle Bit S:33/9 = 0

Math

Math Overflow Selected S:2/14 = 0
Overflow Trap S:5/0 = 0
Carry S:0/0 = 0
Overflow S:0/1 = 0
Zero Bit S:0/2 = 0
Sign Bit S:0/3 = 0
Math Register (lo word) S:13 = 0
Math Register (high word) S:14-S:13 = 0
Math Register (32 Bit) S:14-S:13 = 0

Chan 0

Processor Mode S:1/0- S:1/4 = Remote Run
Node Address S:15 (low byte) = 0
Baud Rate S:15 (high byte) = ?
Channel Mode S:33/3 = 0
Comms Active S:33/4 = 0
Incoming Cmd Pending S:33/0 = 0
Msg Reply Pending S:33/1 = 0
Outgoing Msg Cmd Pending S:33/2 = 0

Debug

Suspend Code S:7 = 0
Suspend File S:8 = 0

Errors

Fault Override At Power Up S:1/8 = 0
Startup Protection Fault S:1/9 = 0
Major Error Halt S:1/13 = 0
Overflow Trap S:5/0 = 0
Control Register Error S:5/2 = 0
Major Error Executing User
Fault Rtn. S:5/3 = 0
Retentive Data Lost S:5/11 = 0
Input Filter Selection Modified S:5/13 = 0
Fault Routine S:29 = 0
Major Error S:6 = 0h
Error Description:

Protection

Deny Future Access S:1/14 = No
Data File Overwrite Protection Lost S:36/10 = False

Mem Module

Memory Module Loaded On Boot S:5/8 = 0
Password Mismatch S:5/9 = 0
Load Memory Module On Memory Error S:1/10 = 0
Load Memory Module Always S:1/11 = 0
On Power up Go To Run (Mode Behavior) S:1/12 = 0
Program Compare S:2/9 = 0
Data File Overwrite Protection Lost S:36/10 = 0

Forces

Forces Enabled S:1/5 = Yes
Forces Installed S:1/6 = No

Data File B3 (bin) -- BINARY

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol) Description
B3:0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	

Data File T4 -- TIMER

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol) Description
T4:0	1	1	0	.01 sec	50	30	timer signal 1 section1
T4:1	0	0	0	.01 sec	50	0	signal from timer1 section2; peaks
T4:2	1	0	1	.01 sec	50	50	
T4:3	1	0	1	.01 sec	50	50	
T4:4	1	0	1	.01 sec	50	50	
T4:5	1	0	1	.01 sec	50	0	
T4:6	1	0	1	.01 sec	50	50	
T4:7	1	0	1	.01 sec	50	50	
T4:8	1	0	1	.01 sec	50	50	
T4:9	1	0	1	.01 sec	50	50	
T4:10	1	1	0	.01 sec	50	30	
T4:11	0	0	0	.01 sec	50	0	
T4:12	0	0	0	.01 sec	50	0	
T4:13	0	0	0	.01 sec	50	50	
T4:14	0	0	0	.01 sec	50	50	
T4:15	0	0	0	.01 sec	50	50	
T4:16	0	0	0	.01 sec	50	0	

Data File C5 -- COUNTER

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol) Description
C5:0	0	0	1	0	0	0	3	3	op mode counter1

Data File R6 -- CONTROL

Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Data File N7 (dec) -- INTEGER

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	0									

Data File F8 -- FLOAT

Offset	0	1	2	3	4
F8:0	0				

Address (Symbol) = Value [Description]

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV	BLW
B3:0/0			MB for start				
B3:0/1			mode 1				
B3:0/2			mode2				
C5:0			op mode counter1				
C5:0.ACC			op mode selection				
I:0/0	INPUT1	Global	START PB				
O:0.0			addr comm				
O:0/0			out1 on				
S:0			Arithmetic Flags				
S:0/0			Processor Arithmetic Carry Flag				
S:0/1			Processor Arithmetic Underflow/ Overflow Flag				
S:0/2			Processor Arithmetic Zero Flag				
S:0/3			Processor Arithmetic Sign Flag				
S:1			Processor Mode Status/ Control				
S:1/0			Processor Mode Bit 0				
S:1/1			Processor Mode Bit 1				
S:1/2			Processor Mode Bit 2				
S:1/3			Processor Mode Bit 3				
S:1/4			Processor Mode Bit 4				
S:1/5			Forces Enabled				
S:1/6			Forces Present				
S:1/7			Comms Active				
S:1/8			Fault Override at Powerup				
S:1/9			Startup Protection Fault				
S:1/10			Load Memory Module on Memory Error				
S:1/11			Load Memory Module Always				
S:1/12			Load Memory Module and RUN				
S:1/13			Major Error Halted				
S:1/14			Access Denied				
S:1/15			First Pass				
S:2/0			STI Pending				
S:2/1			STI Enabled				
S:2/2			STI Executing				
S:2/3			Index Addressing File Range				
S:2/4			Saved with Debug Single Step				
S:2/5			DH-485 Incoming Command Pending				
S:2/6			DH-485 Message Reply Pending				
S:2/7			DH-485 Outgoing Message Command Pending				
S:2/15			Comms Servicing Selection				
S:3			Current Scan Time/ Watchdog Scan Time				
S:4			Time Base				
S:5/0			Overflow Trap				
S:5/2			Control Register Error				
S:5/3			Major Err Detected Executing UserFault Routine				
S:5/4			M0-M1 Referenced on Disabled Slot				
S:5/8			Memory Module Boot				
S:5/9			Memory Module Password Mismatch				
S:5/10			STI Overflow				
S:5/11			Battery Low				
S:6			Major Error Fault Code				
S:7			Suspend Code				
S:8			Suspend File				
S:9			Active Nodes				
S:10			Active Nodes				
S:11			I/O Slot Enables				
S:12			I/O Slot Enables				
S:13			Math Register				
S:14			Math Register				
S:15			Node Address/ Baud Rate				
S:16			Debug Single Step Rung				
S:17			Debug Single Step File				
S:18			Debug Single Step Breakpoint Rung				
S:19			Debug Single Step Breakpoint File				
S:20			Debug Fault/ Powerdown Rung				
S:21			Debug Fault/ Powerdown File				
S:22			Maximum Observed Scan Time				
S:23			Average Scan Time				
S:24			Index Register				
S:25			I/O Interrupt Pending				
S:26			I/O Interrupt Pending				
S:27			I/O Interrupt Enabled				
S:28			I/O Interrupt Enabled				
S:29			User Fault Routine File Number				
S:30			STI Setpoint				
S:31			STI File Number				
S:32			I/O Interrupt Executing				
S:33			Extended Proc Status Control Word				
S:33/0			Incoming Command Pending				
S:33/1			Message Reply Pending				
S:33/2			Outgoing Message Command Pending				
S:33/3			Selection Status User/DF1				
S:33/4			Communicat Active				
S:33/5			Communicat Servicing Selection				
S:33/6			Message Servicing Selection Channel 0				

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV	BLW
S:33/7			Message Servicing Selection Channel 1				
S:33/8			Interrupt Latency Control Flag				
S:33/9			Scan Toggle Flag				
S:33/10			Discrete Input Interrupt Reconfigur Flag				
S:33/11			Online Edit Status				
S:33/12			Online Edit Status				
S:33/13			Scan Time Timebase Selection				
S:33/14			DTR Control Bit				
S:33/15			DTR Force Bit				
S:34			Pass-thru Disabled				
S:34/0			Pass-Thru Disabled Flag				
S:34/1			DH+ Active Node Table Enable Flag				
S:34/2			Floating Point Math Flag Disable,Fl				
S:35			Last 1 ms Scan Time				
S:36			Extended Minor Error Bits				
S:36/8			DII Lost				
S:36/9			STI Lost				
S:36/10			Memory Module Data File Overwrite Protection				
S:37			Clock Calendar Year				
S:38			Clock Calendar Month				
S:39			Clock Calendar Day				
S:40			Clock Calendar Hours				
S:41			Clock Calendar Minutes				
S:42			Clock Calendar Seconds				
S:43			STI Interrupt Time				
S:44			I/O Event Interrupt Time				
S:45			DII Interrupt Time				
S:46			Discrete Input Interrupt- File Number				
S:47			Discrete Input Interrupt- Slot Number				
S:48			Discrete Input Interrupt- Bit Mask				
S:49			Discrete Input Interrupt- Compare Value				
S:50			Processor Catalog Number				
S:51			Discrete Input Interrupt- Return Number				
S:52			Discrete Input Interrupt- Accumulat				
S:53			Reserved/ Clock Calendar Day of the Week				
S:55			Last DII Scan Time				
S:56			Maximum Observed DII Scan Time				
S:57			Operating System Catalog Number				
S:58			Operating System Series				
S:59			Operating System FRN				
S:61			Processor Series				
S:62			Processor Revision				
S:63			User Program Type				
S:64			User Program Functional Index				
S:65			User RAM Size				
S:66			Flash EEPROM Size				
S:67			Channel 0 Active Nodes				
S:68			Channel 0 Active Nodes				
S:69			Channel 0 Active Nodes				
S:70			Channel 0 Active Nodes				
S:71			Channel 0 Active Nodes				
S:72			Channel 0 Active Nodes				
S:73			Channel 0 Active Nodes				
S:74			Channel 0 Active Nodes				
S:75			Channel 0 Active Nodes				
S:76			Channel 0 Active Nodes				
S:77			Channel 0 Active Nodes				
S:78			Channel 0 Active Nodes				
S:79			Channel 0 Active Nodes				
S:80			Channel 0 Active Nodes				
S:81			Channel 0 Active Nodes				
S:82			Channel 0 Active Nodes				
S:83			DH+ Active Nodes				
S:84			DH+ Active Nodes				
S:85			DH+ Active Nodes				
S:86			DH+ Active Nodes				
T4:0			timer signal 1 section1				
T4:0/DN			timer1 signal				
T4:1			signal from timer1 section2; peaks				
T4:1/0							
T4:1/DN							
T4:2							
T4:2/DN			done signal timer 3				
T4:3							
T4:4							
T4:4/DN							
T4:5							
T4:6							
T4:6/DN							
T4:9							
T4:9/DN							
T4:10							
T4:11							
T4:12/DN							

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV	BLW
T4:13							
T4:13/DN							
T4:14							
T4:14/DN							
T4:15							
T4:15/DN							
T4:16							

Instruction Comment Database

Address	Instruction	Description
C5:0.ACC	EQU	op mode selection
O:0.0	MOV	instr

Symbol Group Database

Group_Name	Description