Block: MAIN
Author:
Created: 16.10.2026 09:37:22 am
Last Modified: 16.10.2026 10:05:44 am


Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 roject 2: when buttons 1 3 and 5 (INPUT 1 3 and 5) are pressed together ALL lights (OUTPUT 1 to 6) will turn on and stay on until buttons 2,4 and 6 (INPUT 2, 4 and 6) are pressed together turning off all lights.
this is for SIEMENS S7-200
candidate name: (Eric) Massimiliano Maluta

section left blank

Network 2 turning outputs on


network1: title: turning on - turns all bulbs on when PB1, 3 and 5 are pressed together; MOV_B here is used to transfer to the byte outputs the "all on" status (dec value of 63 converted into binary)

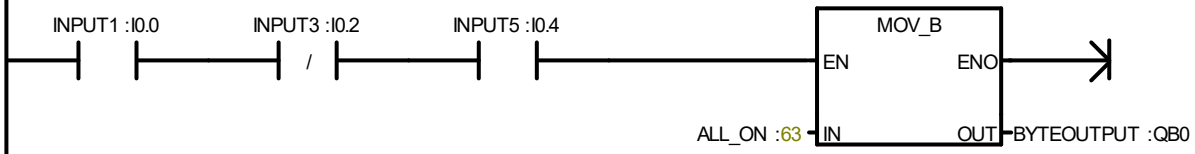

Symbol	Address	Comment
ALL_ON	63	byte_reppresentation of all byte-output when on
BYTEOUTPUT	QB0	byte-reppresentation off all 8 outputs of the system
INPUT1	I0.0	n/o push button
INPUT3	I0.2	n/c push button
INPUT5	I0.4	n/c push button

Network 3 turning outputs off

network 1: turns all bulbs off when PB 2 4 and 6 are pressed; MOV_B here is used to transfer to the byte outputs the "all on" status (dec value of 63 converted into binary)

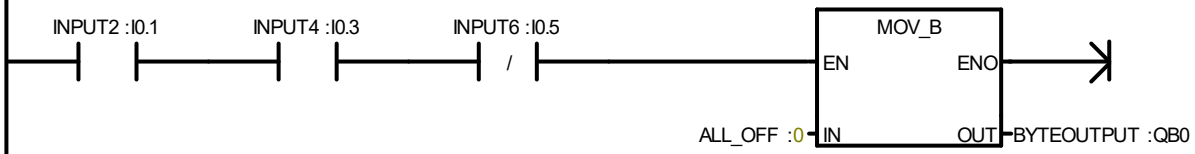


Symbol	Address	Comment
ALL_OFF	0	byte_reppresentation off all 8 outputs when off (all zero/low)
BYTEOUTPUT	QB0	byte-reppresentation off all 8 outputs of the system
INPUT2	I0.1	n/o push button
INPUT4	I0.3	n/o push button
INPUT6	I0.5	n/c push button

Block: SBR_0
Author:
Created: 16.10.2026 09:37:22 am
Last Modified: 16.10.2026 09:37:22 am

Symbol	Var Type	Data Type	Comment
EN	IN	BOOL	
	IN		
	IN_OUT		
	OUT		
	TEMP		

Network 1 Network Title

Network Comment




Block: INT_0
Author:
Created: 16.10.2026 09:37:22 am
Last Modified: 16.10.2026 09:37:22 am

Symbol	Var Type	Data Type	Comment
	TEMP		
	TEMP		
	TEMP		
	TEMP		

Network 1 Network Title

Network Comment



Symbol	Address	Comment
ALL_OFF	0	byte_reppresentation off all 8 outputs when off (all zero/low)
ALL_ON	63	byte_reppresentation of all byte-output when on
BYTEOUTPUT	QB0	byte-reppresentation off all 8 outputs of the system
INPUT5	I0.4	n/c push button
INPUT3	I0.2	n/c push button
INPUT1	I0.0	n/o push button
INPUT6	I0.5	n/c push button
INPUT4	I0.3	n/o push button
INPUT2	I0.1	n/o push button

Symbol	Address	Comment
SBR_0	SBR0	SUBROUTINE COMMENTS
INT_0	INT0	INTERRUPT ROUTINE COMMENTS
MAIN	OB1	PROGRAM COMMENTS

Address	Format	Current Value	New Value
	Signed		
	Signed		
	Signed		
	Signed		
	Signed		

```
//
//DATA PAGE COMMENTS
//
//Press F1 for help and example data page
//
```

PLC

Type: CPU 222 REL 01.22

Ports

	Port 0	Port 1
PLC Address:	2	.
Highest Address:	31	.
Baud Rate:	9.6 kbps	.
Retry Count:	3	.
Gap Update Factor:	10	.

Retentive Ranges

	Data Area	Offset	Number of Elements
Range 0	VB	0	2048
Range 1	VB	0	0
Range 2	T	0	32
Range 3	T	64	32
Range 4	C	0	256
Range 5	MB	14	18

Password

Privileges: Full (Level 1)

Digital Output Table

Freeze Outputs in last state: No

	7	6	5	4	3	2	1	0
Q0.x	.	.	.	.	.	.	.	.
Q1.x	.	.	.	.	.	.	.	.
Q2.x	.	.	.	.	.	.	.	.
Q3.x	.	.	.	.	.	.	.	.
Q4.x	.	.	.	.	.	.	.	.
Q5.x	.	.	.	.	.	.	.	.
Q6.x	.	.	.	.	.	.	.	.
Q7.x	.	.	.	.	.	.	.	.
Q8.x	.	.	.	.	.	.	.	.
Q9.x	.	.	.	.	.	.	.	.
Q10.x	.	.	.	.	.	.	.	.
Q11.x	.	.	.	.	.	.	.	.
Q12.x	.	.	.	.	.	.	.	.
Q13.x	.	.	.	.	.	.	.	.
Q14.x	.	.	.	.	.	.	.	.
Q15.x	.	.	.	.	.	.	.	.

Analog Output Table

This feature is not supported by the current PLC type.

Digital Input Filters

I0.0 - I0.3:	6.40
I0.4 - I0.7:	6.40

Analog Input Filters

AIW0:	x	AIW16:	x	AIW32:	.	AIW48:	.
AIW2:	x	AIW18:	x	AIW34:	.	AIW50:	.
AIW4:	x	AIW20:	x	AIW36:	.	AIW52:	.
AIW6:	x	AIW22:	x	AIW38:	.	AIW54:	.
AIW8:	x	AIW24:	x	AIW40:	.	AIW56:	.
AIW10:	x	AIW26:	x	AIW42:	.	AIW58:	.
AIW12:	x	AIW28:	x	AIW44:	.	AIW60:	.
AIW14:	x	AIW30:	x	AIW46:	.	AIW62:	.

Number of samples: 64
Deadband: 320

Pulse Catch Bits

I0.0:	.	I1.0:	.	I2.0:	.
I0.1:	.	I1.1:	.	I2.1:	.
I0.2:	.	I1.2:	.	I2.2:	.
I0.3:	.	I1.3:	.	I2.3:	.
I0.4:	.	I1.4:	.	I2.4:	.
I0.5:	.	I1.5:	.	I2.5:	.
I0.6:	.	I1.6:	.	I2.6:	.
I0.7:	.	I1.7:	.	I2.7:	.

Background Time

Communication Background Time: 10%

EM Configuration

Position	Configuration Address
0	unused
1	unused

Configure LED

This feature is not supported by the current PLC type.

Increase Memory

This feature is not supported by the current PLC type.