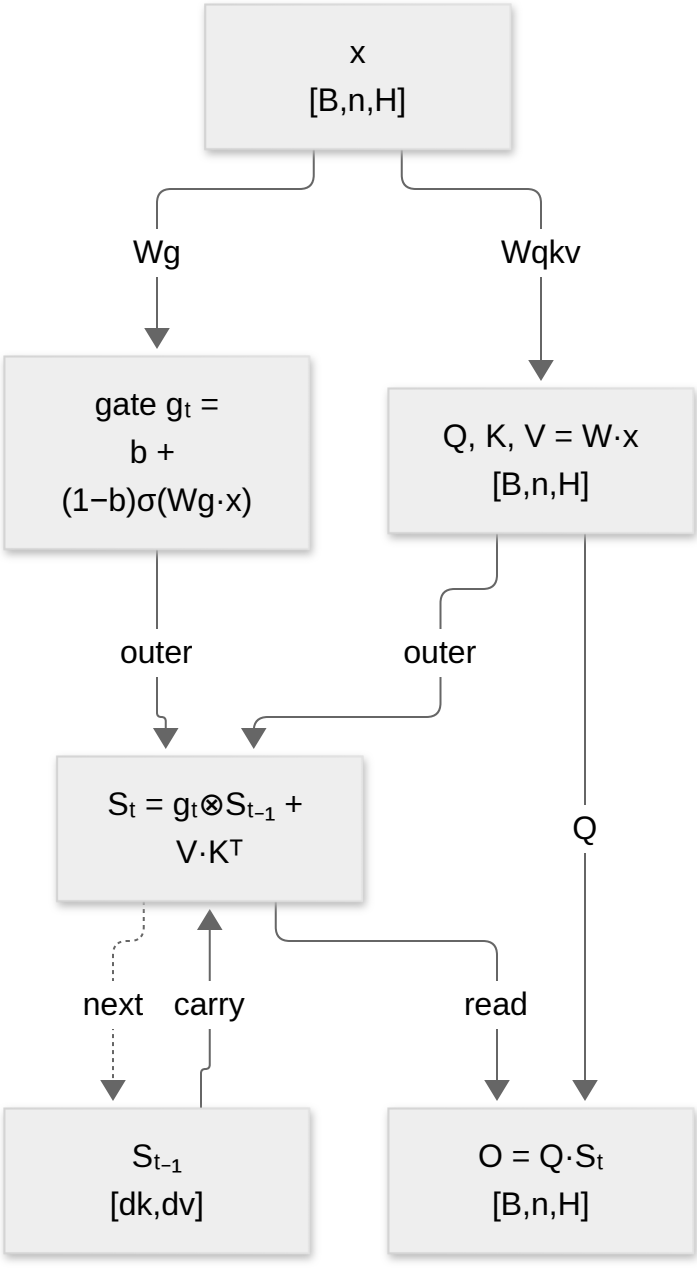

x
[B,n,H]
Wg
Wqkv
gate g_t =
b +
(1−b)σ(Wg·x)
Q, K, V = W·x
[B,n,H]
outer
outer
$S_t = g_t \otimes S_{t-1} +$
$V \cdot K^T$
Q
next
carry
read
S_{t-1}
[dk,dv]
O = Q·S_t
[B,n,H]