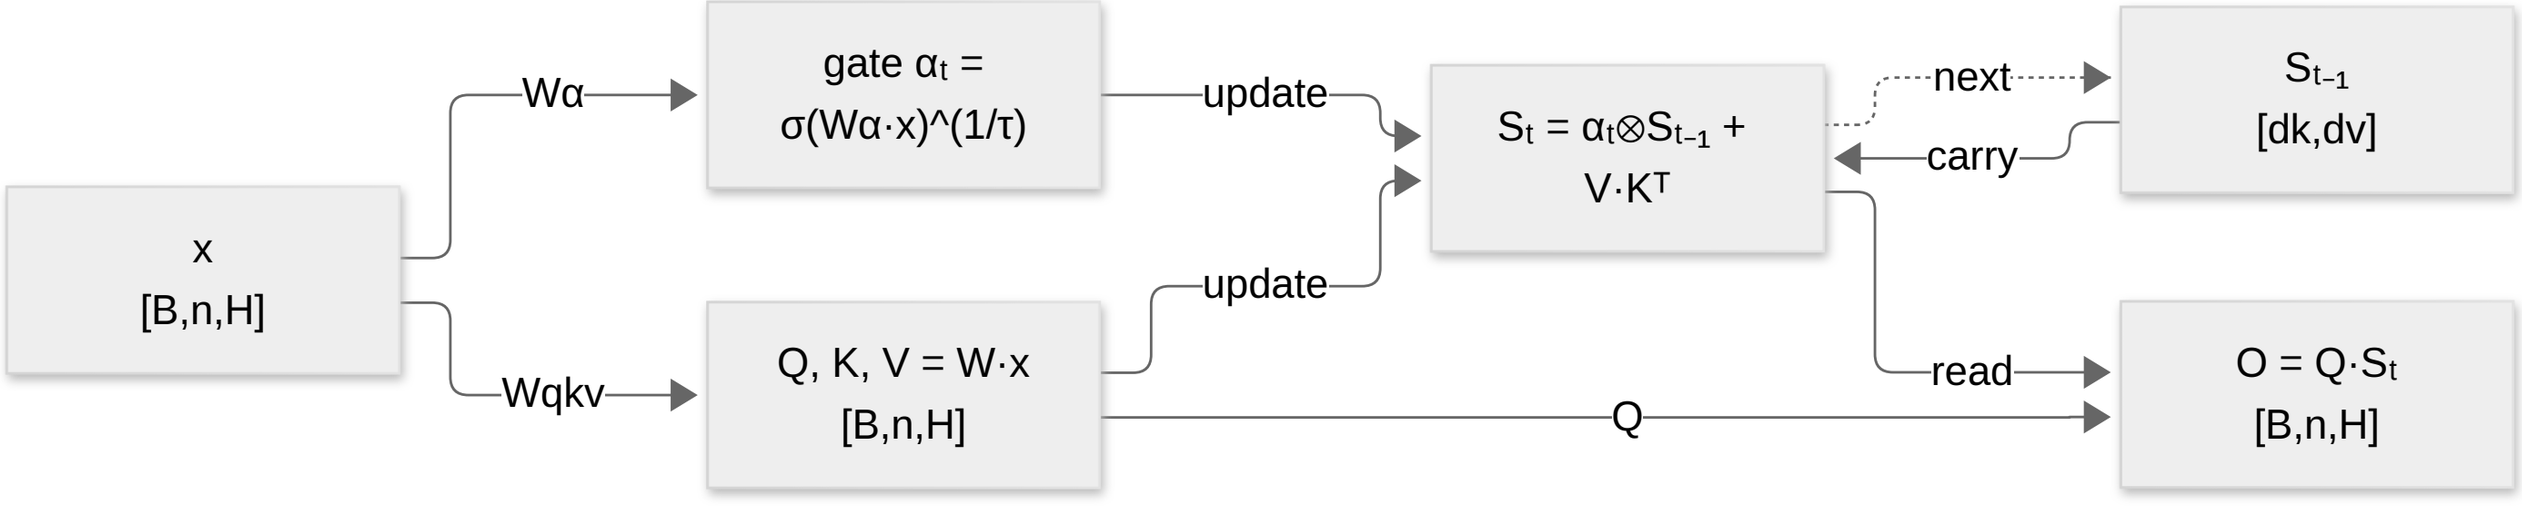

x
[B,n,H]
Wα
Wqkv
gate αt =
σ(Wα·x)^(1/τ)
Q, K, V = W·x
[B,n,H]
update
update
Q
St = αt⊗St−1 +
V·KT
next
carry
read
St−1
[dk,dv]
O = Q·St
[B,n,H]