


Sheet: /			D
File: spur-demo.kicad_sch			
Title:			
Size: A4	Date:	Rev:	
KiCad E.D.A. 8.0.7		Id: 1/6	

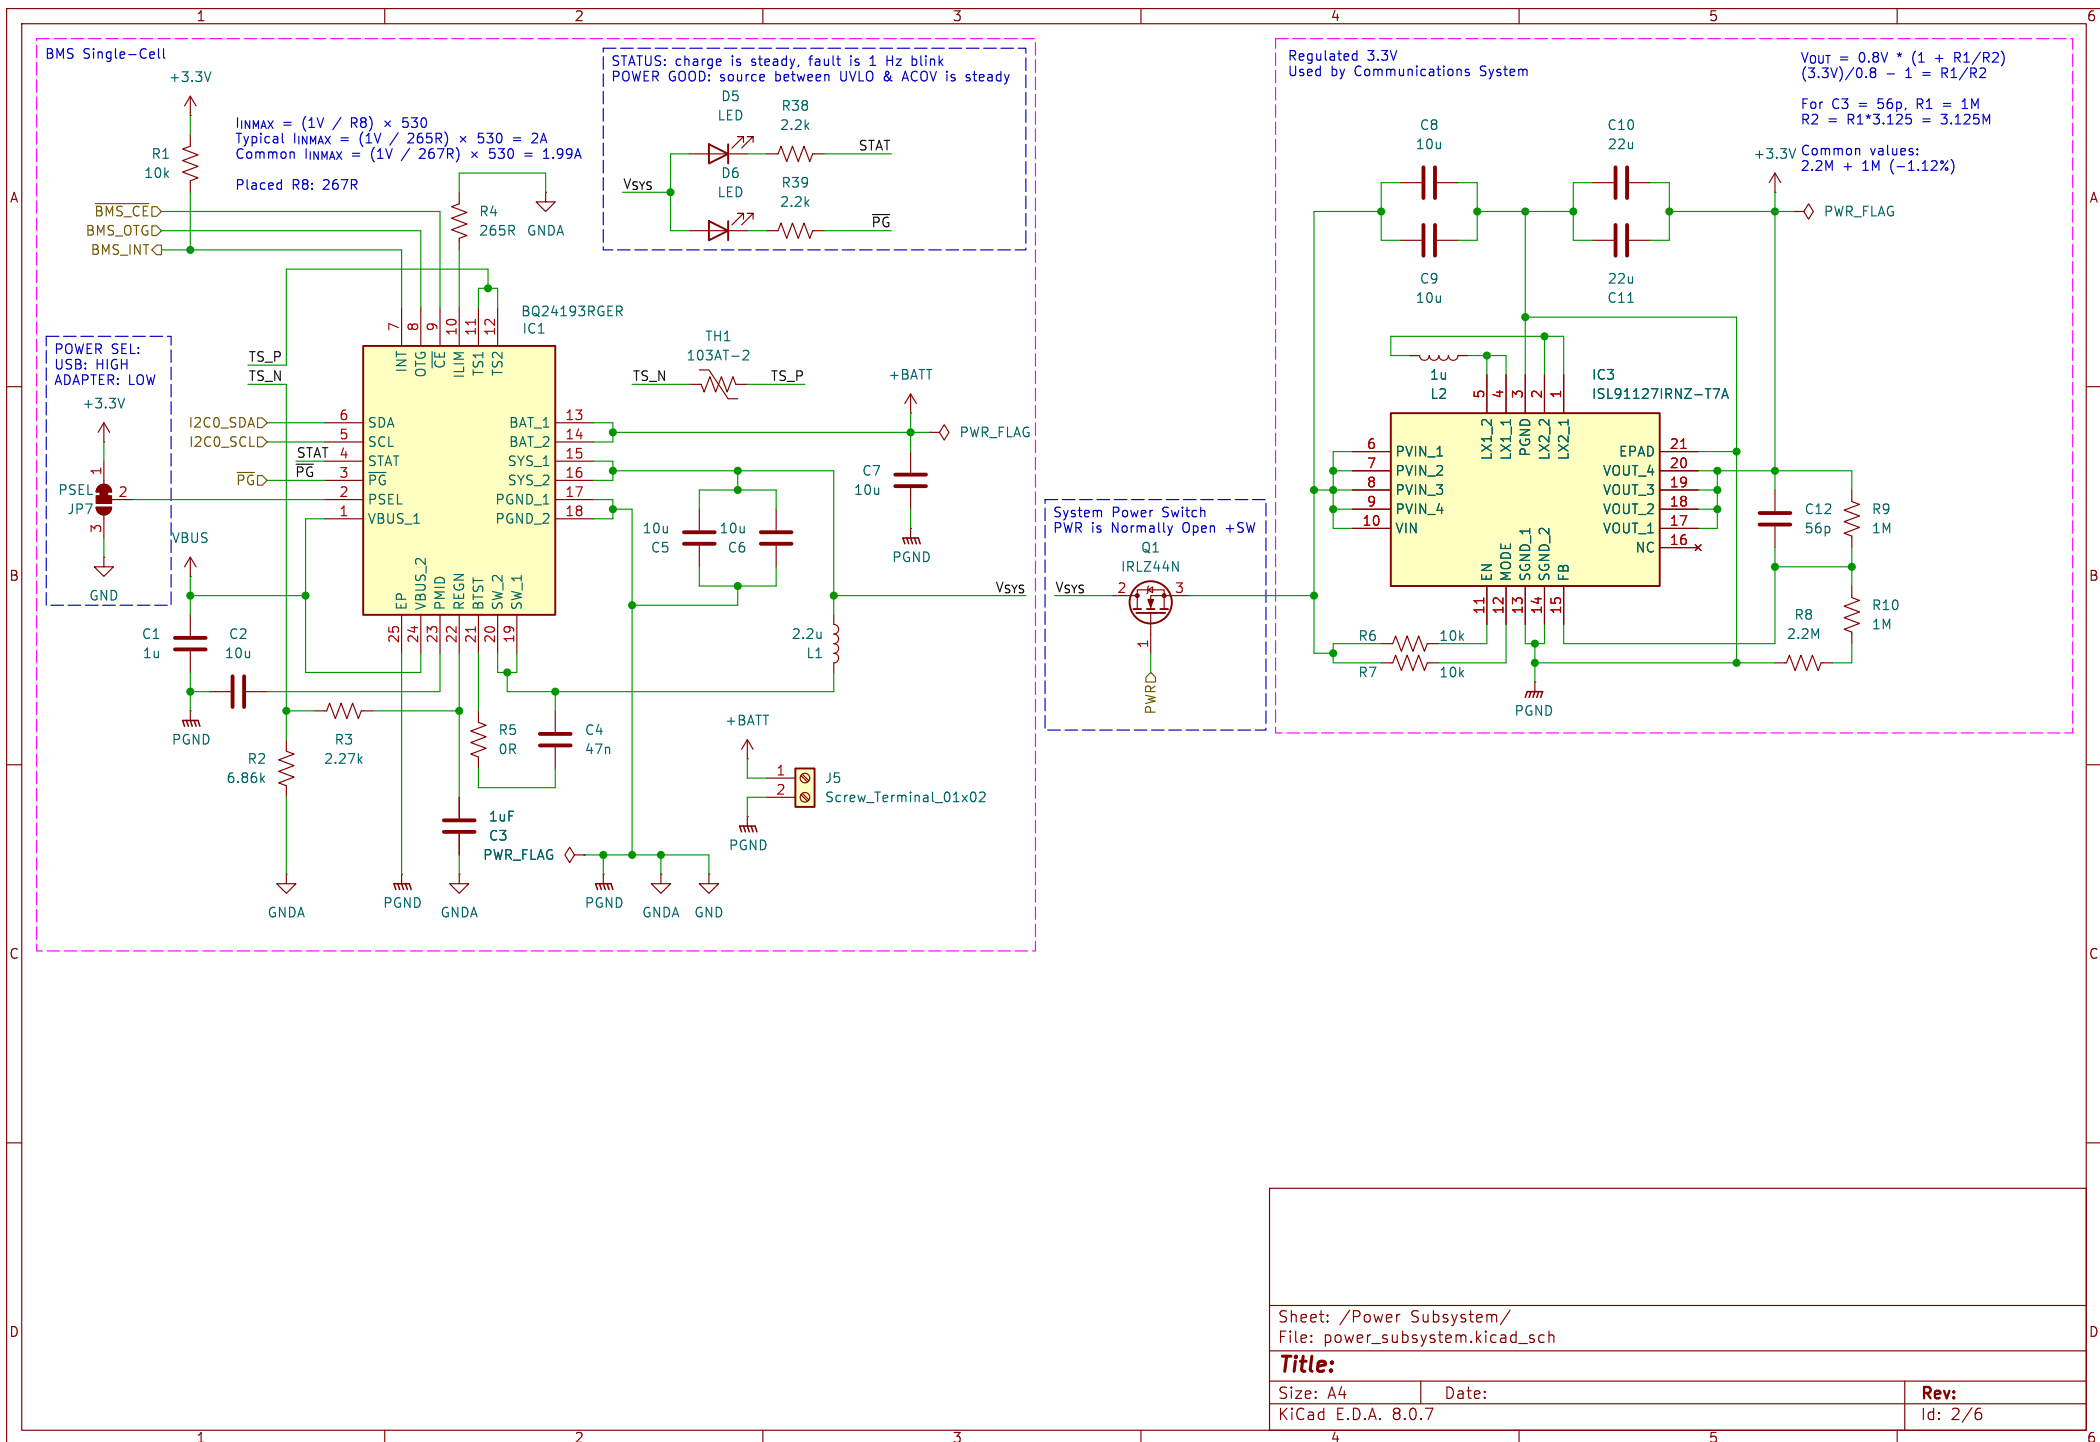

Sheet: /Power Subsystem/
 File: power_subsystem.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.7

Rev:

Id: 2/6

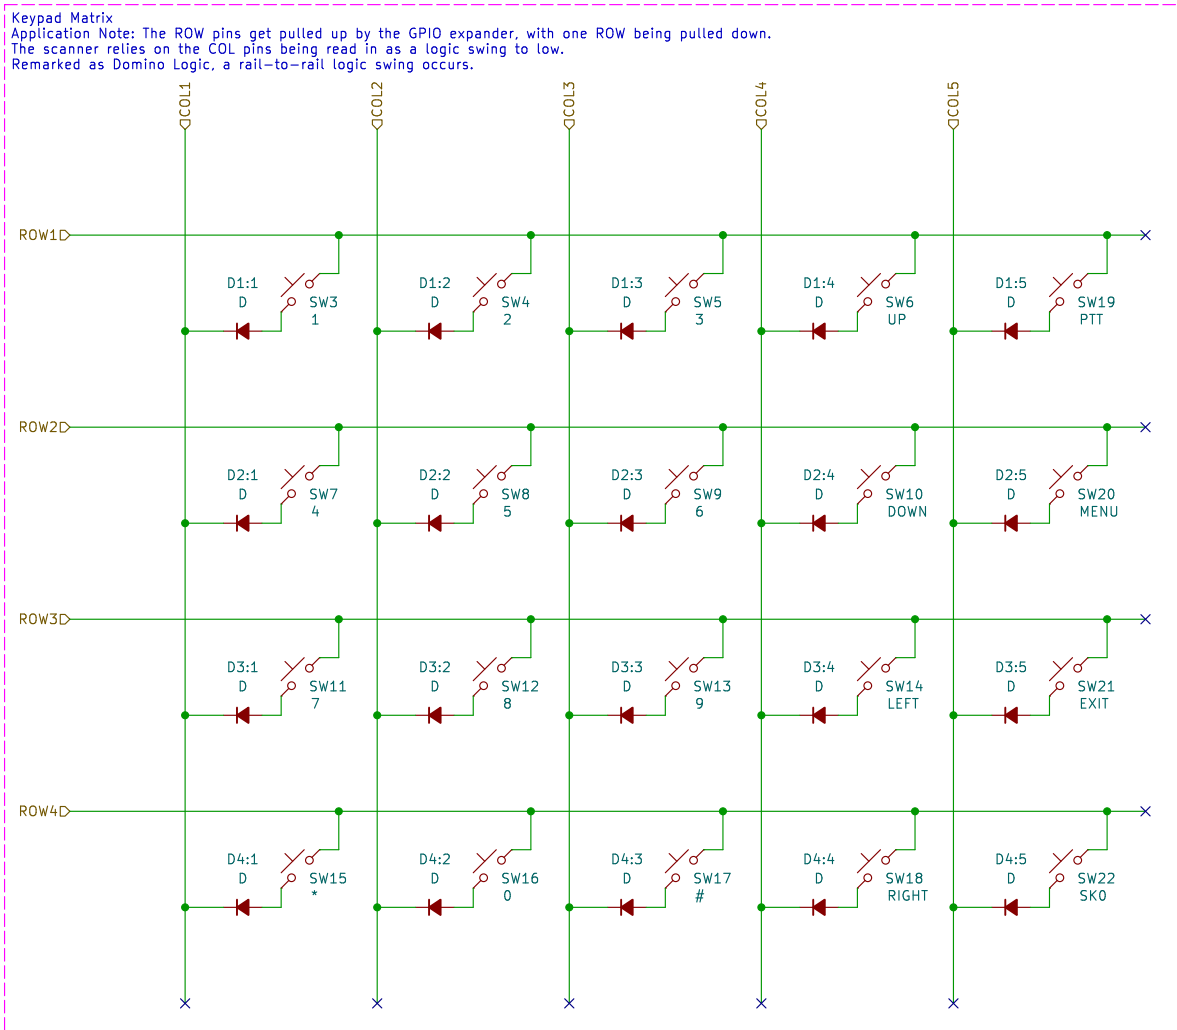

Sheet: /Keypad/
File: keypad.kicad_sch

Title:

Size: A4	Date:
----------	-------


Date:

Rev:


KiCad E.D.A. 8.0.7

Id: 4/6



Microphone Module LM393-based

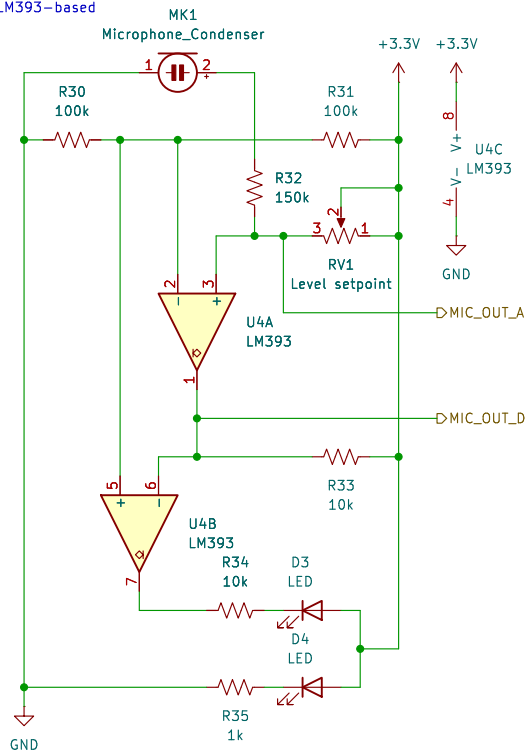

Volume Control Also acts as PWR

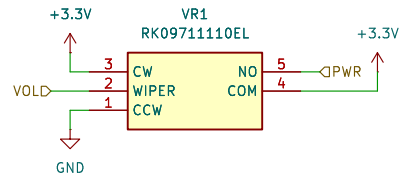

Digital Audio Amplifier over I2S0

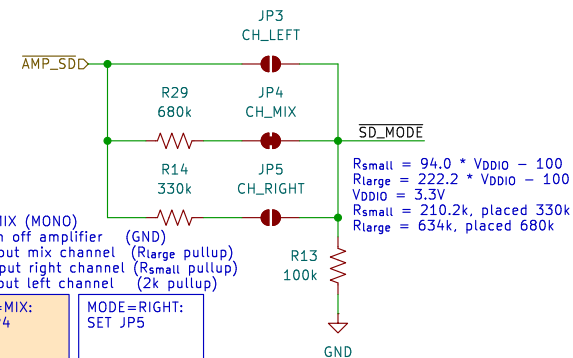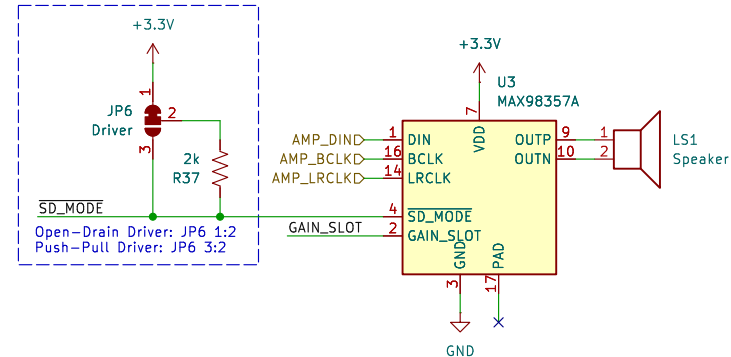


CHANNEL MODE SELECT: MIX (MONO)
SD < 0.16V = Turn off amplifier (GND)
SD 0.16V to 0.77V = Output mix channel (Rlarge pullup)
SD < 0.16V = Output right channel (Rsmall pullup)
SD > 1.4V = Output left channel (2k pullup)

MODE=LEFT: SET JP3
MODE=MIX: SET JP4
MODE=RIGHT: SET JP5

GAIN SLOT SELECT: GAIN=9dB

GAIN=15dB: GAINLogic = LOW GAINr = 100k JP1 3:2, JP2 3:2
GAIN=12dB: GAINLogic = LOW GAINr = 0R JP1 3:2, JP2 1:2
GAIN=9dB: GAINLogic = NC GAINr = 0R JP1 NC, JP2 NC
GAIN=6dB: GAINLogic = HIGH GAINr = 0R JP1 1:2, JP2 1:2
GAIN=3dB: GAINLogic = HIGH GAINr = 100k JP1 1:2, JP2 3:2

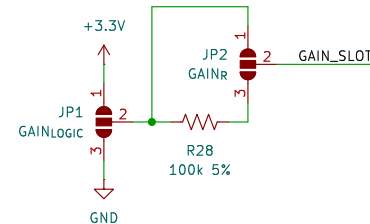

Received Audio Digitizer AF: RX audio from radio module

AF-
AF+

Sheet: /Audio Subsystem/
File: audio_subsystem.kicad_sch

Title:
Size: A4 Date:
KiCad E.D.A. 8.0.7 Rev:
Id: 5/6

